


[Home \(/s/\)](#)[TECHNICAL SUPPORT \(/s/contactsupport\)](/s/contactsupport)[TRAINING \(/s/cpu\)](/s/cpu)[FORUMS \(/s/forums\)](/s/forums)[DEVELOPERS \(/s/developers\)](/s/developers)

IBR200 IoT Router Quick Start Guide

🕒 Mar 24, 2023 · Knowledge

Content

IBR200 IoT Router Quick Start Guide

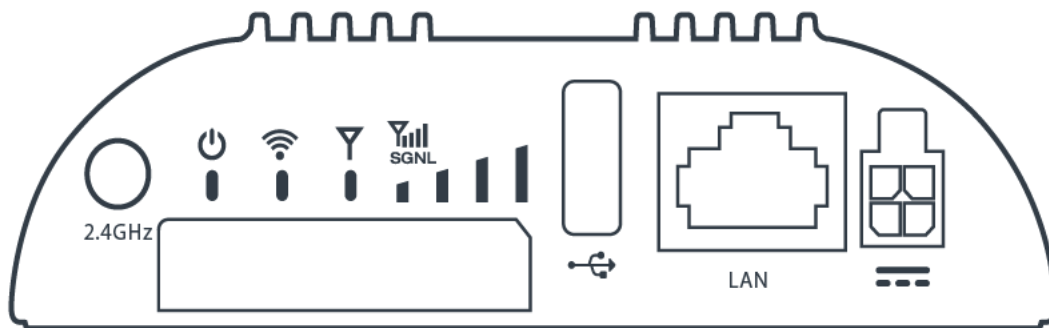

Introduction

This document provides a brief overview of the IBR200 router, discusses what's inside the box, and provides basic setup and installation instructions.

Navigation

Use the following links to quickly navigate through this document

[Before You Begin](#)

[Location Considerations](#)

[SIM Card for Wireless Connectivity](#)

[Required Tools for Setup](#)

[Setup](#)

[STEP 1: Check box for content.](#)

[STEP 2: Open the SIM cover.](#)

[STEP 3: Insert an active 2FF-sized SIM.](#)

[STEP 4: Close and secure the SIM slot cover.](#)

[STEP 5: Attach the LTE cellular antennas.](#)

[STEP 6: Attach the Wi-Fi antenna.](#)

[STEP 7: Mount the router.](#)

[STEP 8: Connect the Ethernet cable.](#)

[STEP 9: Power up the router.](#)

[Step 10: Active the router in NetCloud Manager.](#)

[Understanding LEDs](#)

[Troubleshooting](#)

[IBR200 Router Models](#)

Before You Begin

Read the following before setting up the Cradlepoint IBR200 router.

Location Considerations

To ensure the IBR200 operates efficiently, the following is recommended:

- Ensure the device is positioned to receive optimal signal. Avoid positioning near concrete walls, metal or reflective surfaces, or any other objects that may interfere with RF reception.
- Ensure plenty of ventilation. Avoid installing the device in enclosed spaces.
- Do not install the device in direct exposure to the elements. Extreme heat or cold can and will impact the router's performance.
- Refer to the IBR200 Safety, Regulatory, and Warranty Guide (included with your hardware) for more information about location considerations.

SIM Card for Wireless Connectivity

A wireless broadband data plan must be added to your Cradlepoint IBR200 series branch router for wireless broadband connectivity. Wireless broadband data plans are available from network operators such as Verizon, AT&T, Telstra, etc. The SIM card must be activated and provisioned by the network operator. Contact your network operator for details about selecting a data plan and about the process for provisioning your SIM.

Required Tools for Setup

T6 screwdriver (for battery door cover)

Setup

The following instructions walk you through basic setup of the router. For more advanced setups, contact a professional installer.


STEP 1: Check box for content.

Refer to the following to ensure you received all items included with the IBR200 hardware.

- [1] Cradlepoint IBR200 router
- [1] Power supply
- [2] LTE antennas
- [1] Wi-Fi antenna
- [1] SIM door screw
- [1] Getting Started reference sheet
- [1] Safety, Regulatory, and Warranty guide


STEP 2: Open the SIM cover.

Remove the screw from the SIM slot cover and slide the cover to the right.

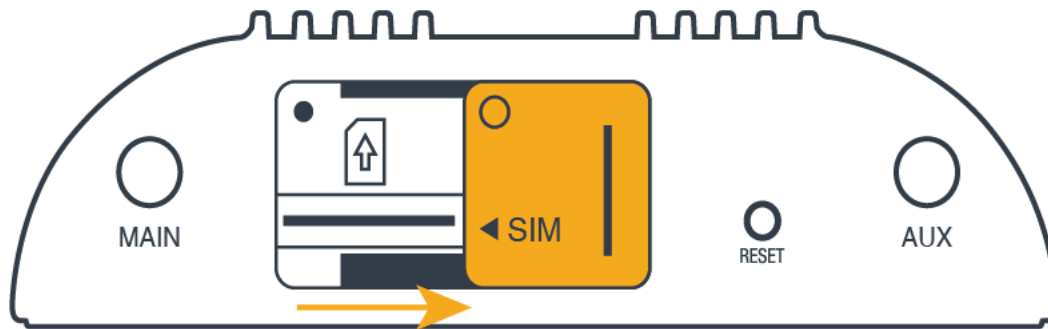
**STEP 3: Insert an active 2FF-sized SIM.**

Insert an activated 2FF-sized SIM card into the SIM slot (contacts down, notch in). The SIM card will click into place.

Note: To remove, depress the SIM card.

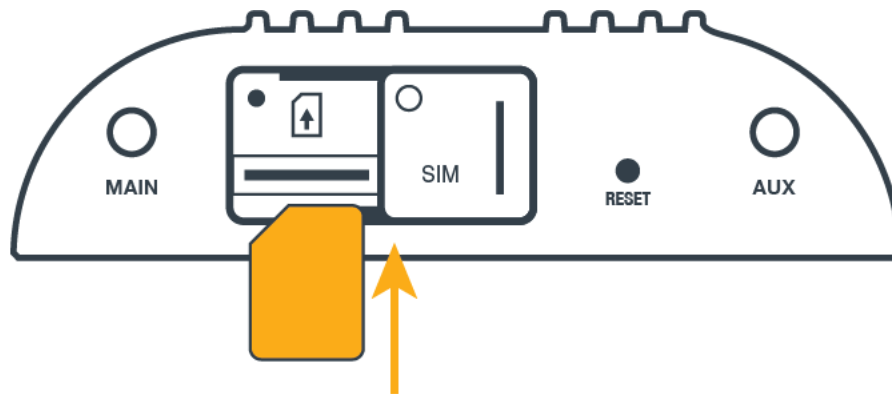**STEP 4: Close and secure the SIM slot cover.**


Slide the SIM cover to the left and replace the screw. Tighten the screw to secure the cover.

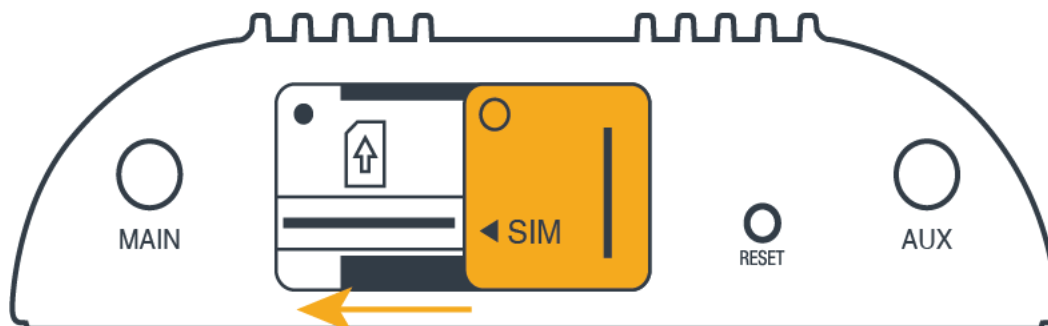

STEP 5: Attach the LTE cellular antennas.


Install the LTE cellular (paddle) antennas on the MAIN and AUX ports.

- Hold the antenna straight and twist the base to thread onto the connector.
- Tighten with fingers only (maximum torque not to exceed 4 in-lbs).
- Do not over-tighten.
- Once the router is mounted and powered on, angle the antennas for optimal signal reception.

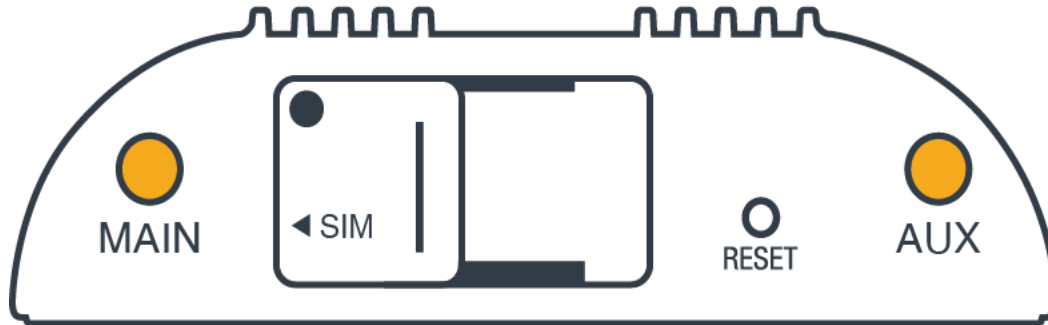**STEP 6: Attach the Wi-Fi antenna.**

Install the Wi-Fi antenna on the port marked 2.4GHz.

- Hold the antenna straight and twist the base to thread onto the connector.
- Tighten with fingers only (maximum torque not to exceed 4 in-lbs).
- Do not over-tighten.
- Once the router is mounted and powered on, angle the antennas for optimal signal reception.

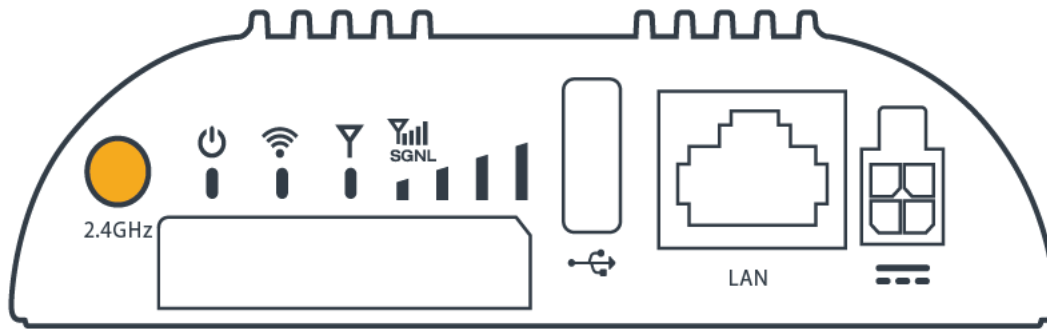


STEP 7: Mount the router.

The IBR200 router may be affixed to a wall or mounted on the ceiling. Refer to the following for best practices:

- Hold the router in the desired position and location and then use a pen or marker to mark the placement location for the screws.
- Ensure the mounting location is away from objects that cause RF interference, including concrete, reflective and metal surface, microwaves, and so on.
- Pre-drill holes for the mounting screws. The mounting holes on the router are 0.2 in (5.2 mm) diameter.
- Use wall anchors to ensure the endpoint is securely mounted.


STEP 8: Connect the Ethernet cable.

Connect the Ethernet cable to the port marked LAN on the back of the IBR200. Connect the other end to your cable modem.

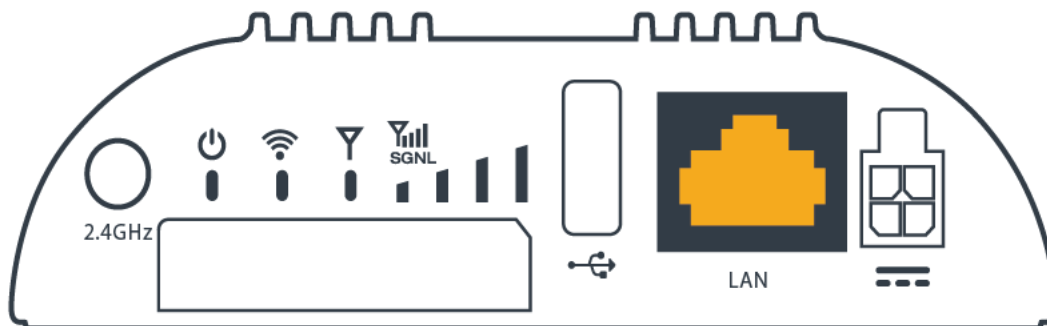

STEP 9: Power up the router.


Insert the 4-pin end of the power source into the four-pin port on the router, ensuring appropriate alignment of pins as illustrated below.



GPIO Connector Pin Details

PIN	Wire Color	Definition	Details
1	Black	Ground	Ground to the vehicle chassis
2	Red	Power	VDC battery constant
3	Orange	Input	VDC ignition sensing accessory input
4	Blue	Output	General purpose I/O (GPIO)


- Plug the adapter into an electrical socket.
- Allow 1 minute for the router to run through its startup sequence.
- Refer to the [Understanding LEDs](#) section of this guide for more information about LED indicator status.

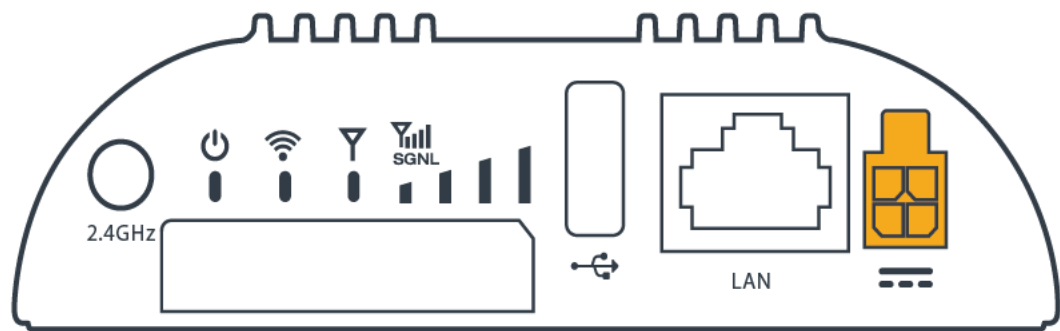







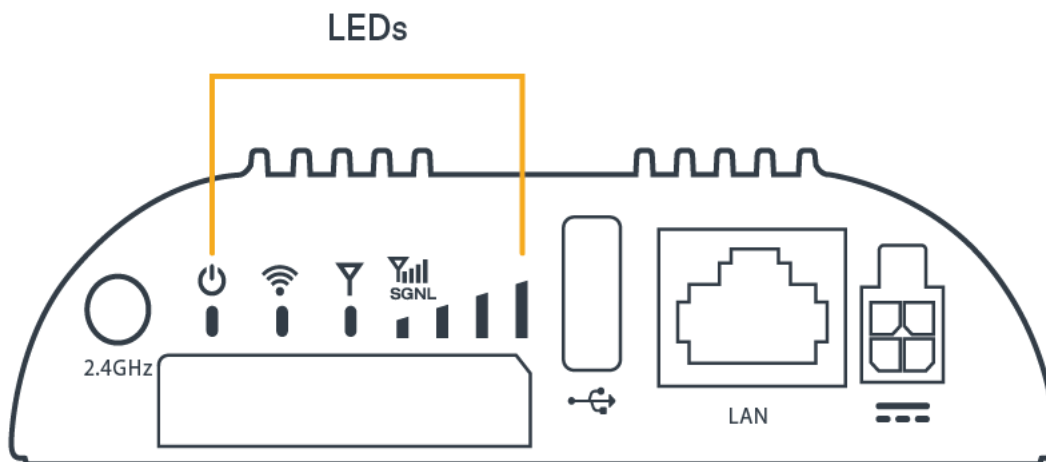

Step 10: Active the router in NetCloud Manager.












Activating your Cradlepoint router requires logging into your NetCloud Manager account. Refer to [Getting Started with NetCloud Manager](https://customer.cradlepoint.com/s/article/Getting-Started-with-NetCloud-Manager) (<https://customer.cradlepoint.com/s/article/Getting-Started-with-NetCloud-Manager>) for more information.

Understanding LEDs



The IBR200 router uses LED lights on the front panel to communicate various status conditions. Use the table below to verify the status of your router after the 1-minute bootup cycle.

STATUS INDICATOR	BEHAVIOR	
	POWER: The Cradlepoint IBR200 must be powered using an approved 12 VDC power source.	
		<ul style="list-style-type: none"> • No Light = Not receiving power. Check the power switch and the power source connection
		<ul style="list-style-type: none"> • Green = Powered on
		<ul style="list-style-type: none"> • Yellow = Attention is needed. Log into NetCloud Manager and use the Remote Connect menu to access the router's local UI to manage the alert. <ul style="list-style-type: none"> ◦ Examples: NCOS is using default password, Wi-Fi is using default PSK, endpoint is not registered in NetCloud manager
	SIGNAL STRENGTH: LED bars indicate the active modem's signal strength	
		<ul style="list-style-type: none"> • No Light = Modem is not operating.
		<ul style="list-style-type: none"> • 4 Solid Bars = Strongest signal.
		<ul style="list-style-type: none"> • 1 Blinking Bar = Weakest signal (a blinking bar indicates half of a bar).

STATUS INDICATOR	BEHAVIOR	
		<ul style="list-style-type: none"> • 4 Blinking Bars = SIM door is not installed, modem is off.
	EMBEDDED MODEM: Indicates connection status for the embedded (internal) modem.	
		<ul style="list-style-type: none"> • No Light = Modem is not connected.
		<ul style="list-style-type: none"> • Solid Green = Modem has established an active connection.
		<ul style="list-style-type: none"> • Blinking Green = Modem is connecting.
		<ul style="list-style-type: none"> • Solid Yellow = Modem is not active.
		<ul style="list-style-type: none"> • Blinking Yellow = Data connection error. No modem connection possible.
		<ul style="list-style-type: none"> • Blinking Red = Modem is in the process of resetting.
	WI-FI: Indicates the Wi-Fi status.	
		<ul style="list-style-type: none"> • No Light = Wi-Fi is not operating.
		<ul style="list-style-type: none"> • Solid Green = Wi-Fi is on and operating normally
OTHER	ADDITIONAL LED INDICATIONS	
	ETHERNET PORT LIGHTS: LEDs on either side of each Ethernet port on the backside of the endpoint indicating connection status. <ul style="list-style-type: none"> • Yellow = 10/100 Link/Activity 	

Troubleshooting

If the device takes longer than five minutes to connect to the Internet, log into the local UI of the device to make configuration changes or to start the troubleshooting process. You must be physically co-located with the device to do this. Refer to [No Internet or Connection Issues](https://customer.cradlepoint.com/s/article/NCOS-No-Internet-or-Connection-Issues) (<https://customer.cradlepoint.com/s/article/NCOS-No-Internet-or-Connection-Issues>) for more information.

Once the device connects to the Internet, it should then connect to your NetCloud Manager account and start its configuration download.

Resources

[IBR200 Series Router Webpage \(https://cradlepoint.com/product/endpoints/ibr200/\)](https://cradlepoint.com/product/endpoints/ibr200/)

[IBR200 Series Router Data Sheet \(https://resources.cradlepoint.com/product-resources/spec-sheet-cor-ibr200/\)](https://resources.cradlepoint.com/product-resources/spec-sheet-cor-ibr200/)

Help and Support

[Cradlepoint Connect Customer Community \(https://customer.cradlepoint.com/s/\)](https://customer.cradlepoint.com/s/)

[Cradlepoint Support Services \(https://cradlepoint.com/support/\)](https://cradlepoint.com/support/)

[Contact Us \(https://cradlepoint.com/about-us/contact-us/\)](https://cradlepoint.com/about-us/contact-us/)

Terms of Service

[Terms of Service & License Agreement \(https://cradlepoint.com/about-us/terms-of-service/\)](https://cradlepoint.com/about-us/terms-of-service/)

[Privacy Policy \(https://cradlepoint.com/privacy-policy/\)](https://cradlepoint.com/privacy-policy/)

[GDPR Privacy Policy \(https://cradlepoint.com/about-us/gdpr-privacy-policy/\)](https://cradlepoint.com/about-us/gdpr-privacy-policy/)

[Return to top \(https://cradlepoint.lightning.force.com/lightning/r/Knowledge__kav/ka93t000000PCidAAG/view#Nav\)](https://cradlepoint.lightning.force.com/lightning/r/Knowledge__kav/ka93t000000PCidAAG/view#Nav)

IBR200 Router Models

This document applies to the following IBR200 models:

CRADLEPOINT IBR200-10M-VZ S3A748A

CRADLEPOINT IBR200-10M-B-AT S3A749A

CRADLEPOINT IBR200-10M-C-SP S3A838A

CRADLEPOINT IBR200-10M-D-EU S3A910A

CRADLEPOINT IBR200-10M-E-AP S3A911A

Title

IBR200 IoT Router Quick Start Guide

URL Name

COR-IBR200

Was this article helpful?



0



0

Don't see what you're looking for?

Ask a Question

Contact Support



[Cradlepoint Privacy Policy \(https://cradlepoint.com/privacy-policy/\)](https://cradlepoint.com/privacy-policy/)