

Balance 710

Enterprise SD-WAN. Combine 7 Links.



At a Glance



Up to 7x

Ethernet WAN
(Gigabit Ethernet)



Up to 3x

Ethernet LAN
(Gigabit Ethernet)



1x

USB WAN Port



2.5Gbps

Stateful Firewall
Throughput



400Mbps

PepVPN Throughput
(256-bit AES)




300

VPN Peers

Balance 710

Specifications

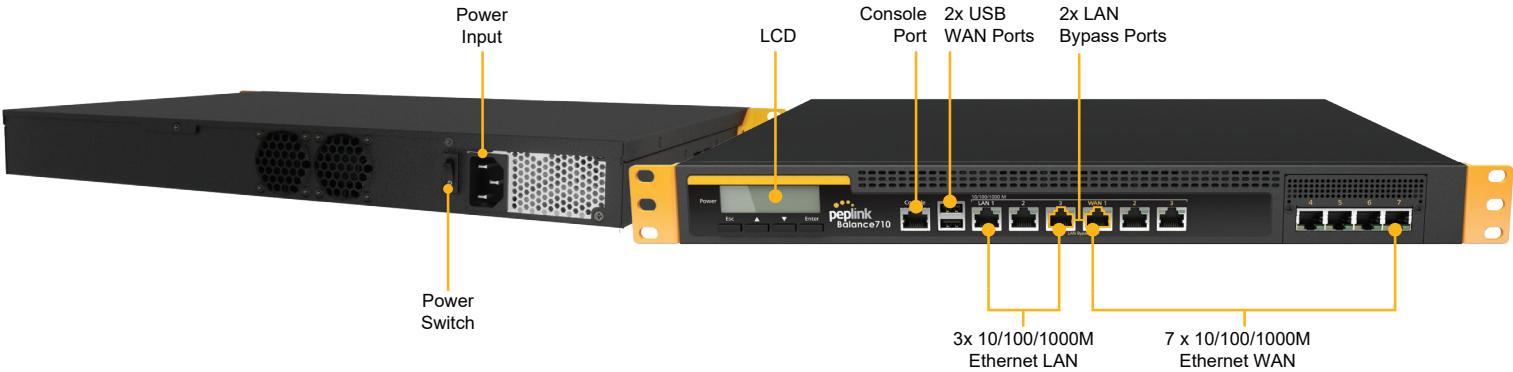

| | | | |
|------------------------------------|----------------------------|---|---|
| WAN Interface | 7 (GE) 1x USB Interface | Remote AP & Multiple Config Profiles Management | Yes |
| LAN Interface | 3 (GE) | LAN Bypass | Yes |
| Stateful Firewall Throughput | 2.5 Gbps | Remote User Access | Yes |
| PepVPN Throughput (No Encryption) | 400 Mbps | L2TP / PPTP VPN Server | Yes |
| PepVPN Throughput (256-bit AES) | 400 Mbps | Bandwidth Usage Monitor | Yes |
| Recommended Users | 500 - 2000 | QoS for VoIP and E-commerce | Yes |
| Number of PepVPN SpeedFusion Peers | 300 | User Groups Bandwidth Control | Yes |
| Maximum Number of AP Supported | 250 | Web Blocking | Yes |
| SpeedFusion Hot Failover | Yes | Operating Temperature | 32°– 104° F / 0°– 40° C |
| SpeedFusion WAN Smoothing | Yes | LACP (802.3ad) NIC Bonding | Yes |
| SpeedFusion Bandwidth Bonding | Yes | Power Consumption | 70 W |
| Central Management | InControl 2 | 1U Rack-mount | Yes |
| High Availability | Yes | Dimensions (W x D x H) | 16.8 x 12 x 1.73 inches / 42.6 x 30.5 x 4.4 cm |
| Drop-in Mode | Yes | Weight | 15.4 pounds / 7 kg |
| Content Filtering | Full | Certifications | FCC, CE, RoHS |
| Manage Pepwave AP | Yes | Warranty | 1-Year Limited Warranty |
| | | Package Content | 1x Balance 710 Power Cord (ACW-614) 1 Pair of Mounting Brackets (ACW-382) |

Ordering Information

| Product Code | Model | Description |
|--------------|-------------|---|
| BPL-710 | Balance 710 | 7x GE WAN ports and 3x GE LAN ports. SpeedFusion capable. |