

Pepwave AP One Firmware 3.9.3 User Manual

Pepwave AP One / Peplink AP Pro Series:

AP One AX / AP One AX Lite / AP One Rugged

AP Pro AX

Pepwave AP One Firmware 3.9.3

October 2023

Introduction and Scope

Our AP Series of enterprise-grade 802.11ax/ac/a/b/g/n Wi-Fi access points is engineered to provide fast, dependable, and flexible operation in a variety of environments, all controlled by an easy-to-use centralized management system.

From the small but powerful AP One AC mini to the top-of-the-line AP Pro Duo our AP Series offers wireless networking solutions to suit any business need, and every access point is loaded with essential features such as multiple SSIDs, VLAN, Mesh, WDS, and Guest Protect.

A single access point provides as many as 32 virtual access points (16 on single-radio models), each with its own security policy (WPA, WPA2, etc.) and authentication mechanism (802.1x, open, captive portal, etc.), allowing faster, easier, and more cost-effective network builds.

Each member of the AP Series family also features a high-powered Wi-Fi transmitter that greatly enhances coverage and performance while reducing equipment costs and maintenance.

Ch1. Product Features and Benefits

Key features and benefits of AP Series access points:

- High-powered Wi-Fi transmitter that enhances coverage and lowers cost of ownership.
 - Independent security policies and encryption mechanisms for each virtual access point allow fast, flexible, cost-effective network builds.
 - Centralized management via InControl reduces maintenance expense and time.
 - Mesh support allows for wireless expansion and enhancement of Wi-Fi coverage.
 - WDS support allows secure and fast network expansion.
 - Guest Protect support guards sensitive business data and subnetworks.
 - WMM (Wi-Fi Multimedia) and QoS (Quality of Service) support keeps video and other bandwidth-intensive data flowing fast and lag-free.
 - Supports Wi-Fi Air Monitoring for remote troubleshooting, and proactively monitoring Wi-Fi and WAN performance.
-

Ch2. Package Contents

AP One AX (APO-AX)

1 x AP One AX
1 x Ceiling Mount
1 x Screw Kit

AP One AX Lite (APO-AX-LITE)

1 x AP One AX Lite
1 x Ceiling Mount
1 x Screw Kit

AP One Rugged (APO-AC-RUG)

1 x AP One Rugged
1 x 12V2A Power Supply
2 x Dual Band Wi-Fi Antennas

AP Pro AX (APP-AX-IP67)

1 x AP One Rugged
1 x Water Proof DC Power Plug for IP67
1 x Waterproof Ethernet Connector Kit
1 x Mounting Kit

Ch3. Hardware Overview

AP One AX (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch3-hardware-overview/front-view/>)

AP One AX Lite (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch3-hardware-overview/ap-one-ax-lite/>)

AP One Rugged (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch3-hardware-overview/ap-one-rugged/>)

AP Pro AX (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch3-hardware-overview/ap-pro-ax/>)

AP One AX

Front View

Top



Side

Bottom




LED Indicators

Power

Blue LED

OFF – Power is Off

ON – Power is On




Status

Blue LED

OFF – Access point is initializing

ON – Access point is ready



Ethernet Port

**Blue
LED**

OFF – No data is being transferred or no device is connected to the Ethernet port



BLINKING – Ethernet port is sending/receiving data

ON – A powered-on device is connected to Ethernet port

	Port Type	Auto MDI/MDI-X ports
Wi-Fi	Blue LED	OFF – 2.4/5GHz Wi-Fi radio is off ON – 2.4/5GHz Wi-Fi radio is on / no Wi-Fi mesh uplink BLINKING – Indicates the state of the 2.4/5GHz Wi-Fi mesh uplink




AP One AX Lite

Front View




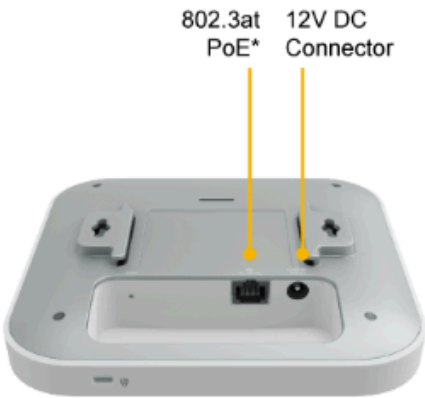

AP-ONE-AX-LITE




* AC/DC adapter and PoE Injector are not included.

LED Indicators

Status 	Blue LED	OFF – Access point is initializing ON – Access point is ready
Ethernet Port 	Blue LED	OFF – No data is being transferred or no device is connected to the Ethernet port BLINKING – Ethernet port is sending/receiving data ON – A powered-on device is connected to the Ethernet port
Wi-Fi 	Blue LED	OFF – 2.4/5GHz Wi-Fi radio is off ON – 2.4/5GHz Wi-Fi radio is on / no Wi-Fi mesh uplink BLINKING – Indicates the state of the 2.4/5GHz Wi-Fi mesh uplink state

AP One Rugged

Front View

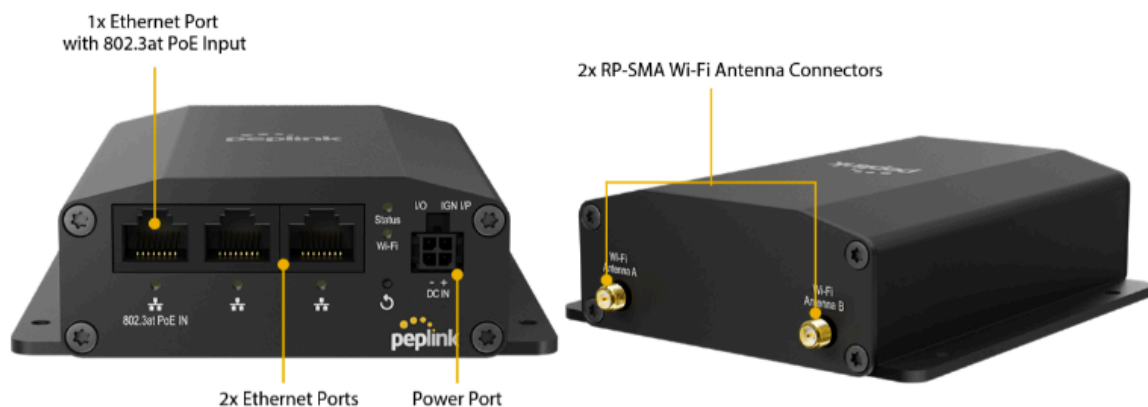


LED Indicators

Status	RED – Access point is initializing
	GREEN – Access point is ready
Wi-Fi	OFF – Wi-Fi AP is off
	GREEN – Wi-Fi AP is on
Ethernet Port	ON – Port is connected without traffic LAN
	BLINKING – Ethernet port sending/receiving data
	OFF – No data is being transferred or No device connected to Ethernet port

AP Pro AX

Front View

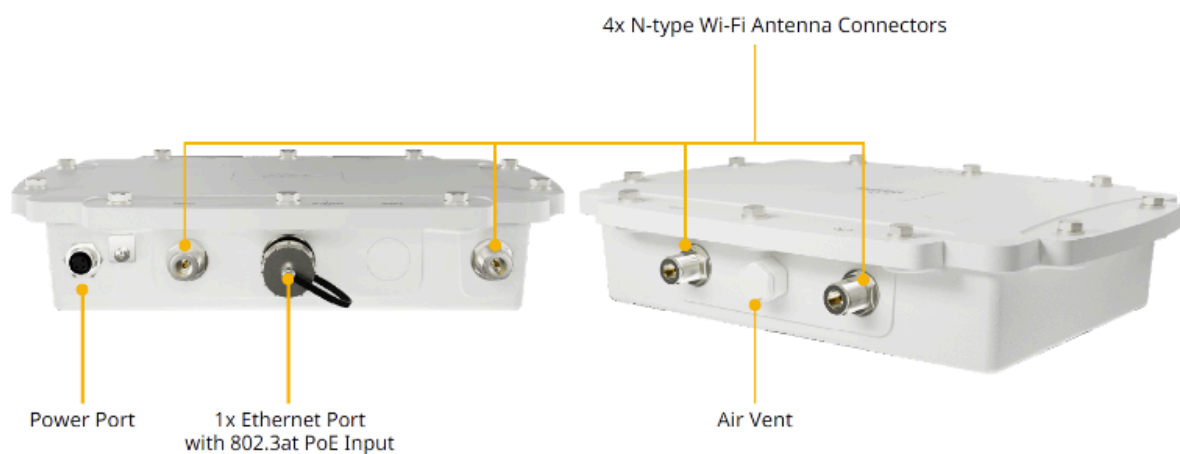


LED Indicators

Status	OFF – Access point is initializing
	ON – Access point is ready

Ch4. Installation

Your access point acts as a bridge between wireless and wired Ethernet interfaces.

A typical setup follows:

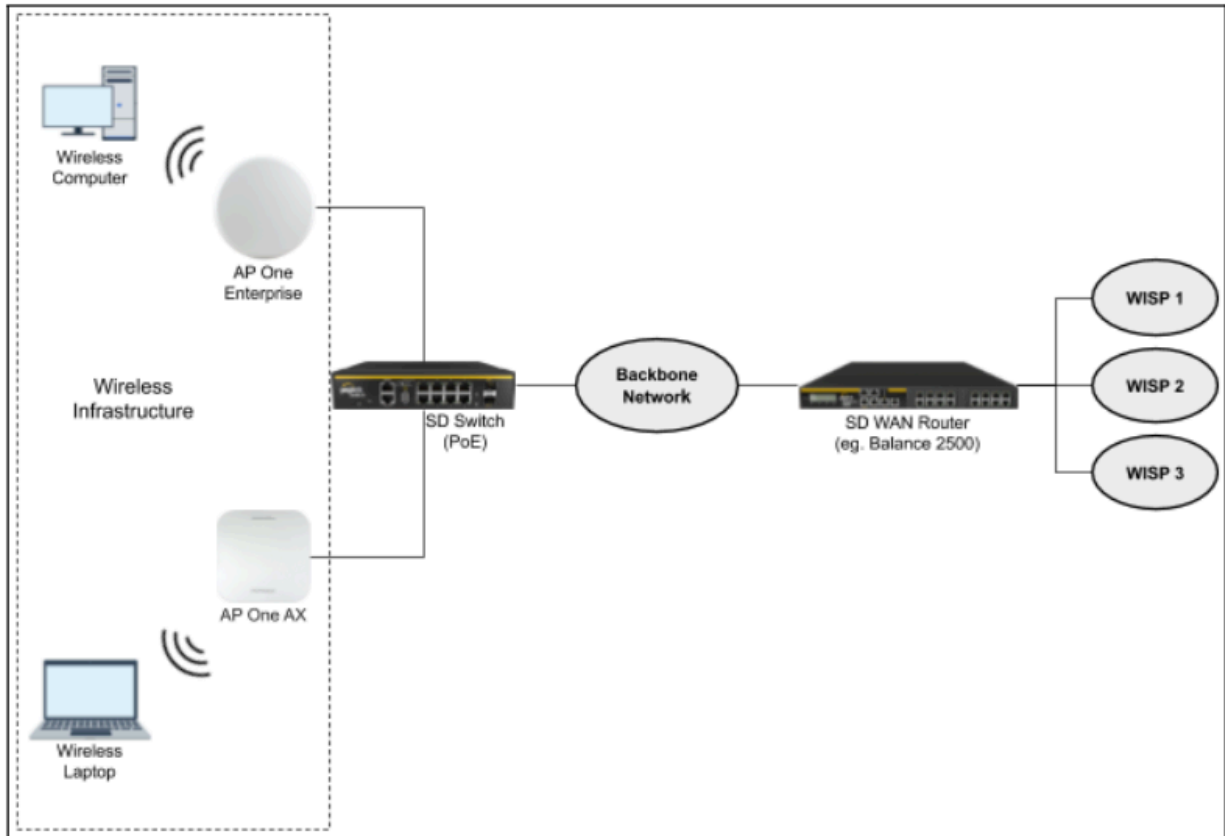

Installation Procedures

1. Connect the Ethernet port on the unit to the backbone network using an Ethernet cable. The port should auto sense whether the cable is straight-through or crossover.
2. There are two methods to power on the device as below:
 1. For those Pepwave AP devices having built-in PoE ports only, using an Ethernet cable to connect to the Power over Ethernet (PoE) switch or PoE injector.
 2. For those Pepwave AP devices that have a DC power source, plug the AC adapter to the DC connector of the unit.
3. Wait for the status LED to turn green.
4. Connect a PC to the backbone network. Configure the IP address of the PC to be any IP address between 192.168.0.4 and 192.168.0.254, with a subnet mask of 255.255.255.0.
5. Using your favourite browser, connect to <https://192.168.0.3> (<https://192.168.0.3/>).
6. Enter the default admin login ID and password, admin and public respectively.

- After logging in, the Dashboard appears. Click the System tab to begin setting up your access point.

The screenshot shows the Pepwave Dashboard with the following sections:

- WAN 1**: IP Address: [redacted], Status: ■ Connected, [Details...](#), [Disconnect](#)
- LAN Interface**: Router IP Address: 192.168.0.3
- Wi-Fi AP**: ■ ON [Details](#)
- Device Information**:
 - Model: Pepwave AP One AX Lite
 - Firmware: 3.9.2 build 4947
 - Uptime: 0 days 0 hours 7 minutes
 - CPU Load:

1%
 - Throughput:

↓ 6.0 kbps ↑ 5.0 kbps

Copyright © Pepwave. All rights reserved.

Ch5. Dashboard

The **Dashboard** section contains a number of displays to keep you up-to-date on your access point's status and operation. Remote assistance can also be turned off here, if it has been enabled.

The screenshot shows the Pepwave Dashboard with the following sections:

- WAN 1**: IP Address: 192.168.50.19, Status: ■ Connected, [Details...](#), [Disconnect](#)
- LAN Interface**: Router IP Address: 192.168.0.3
- Wi-Fi AP**: ■ ON [Details](#)
- Device Information**:
 - Model: Pepwave AP One AX Lite
 - Firmware: 3.9.2 build 4947
 - Uptime: 0 days 0 hours 8 minutes
 - CPU Load:

0%
 - Throughput:

↓ 22.0 kbps ↑ 28.0 kbps
- Remote Assistance Status**: ■ [Turn off](#)

Copyright © Pepwave. All rights reserved.

WAN 1
IP Address: [redacted] [Details...](#) Status: ■ Connected [Disconnect](#)

This section contains WAN status and general device information.

WAN

IP Address	When your access point is connected to a WAN, this field displays the WAN IP address. For more information, click the Details link which shows connection type details
Status	This field displays the current WAN connection status.

Device Information	
Model:	Pepwave AP One AX Lite
Firmware:	3.9.2 build 4947
Uptime:	0 days 0 hours 8 minutes
CPU Load:	<div><div></div></div> 2%
Throughput:	↓ 40.0 kbps ↑ 102.0 kbps

Device Information

Model	This field displays your access point's model number.
Firmware	The firmware version currently running on your access point appears here.
Uptime	This field displays your access point's uptime since the last reboot or shutdown.
CPU Load	This field shows current loading (0%-100%) on your access point.
Throughput	This field displays your access point's transfer rate in kbps.

Ch6. Network

The settings on the **Network** tab control WAN, LAN, and Port Settings. It also allows you to set up Captive Portal profiles and Misc Settings.

Additionally, some settings on the **Network** tab are able to control PepVPN, Inbound Access, NAT Mapping, and QoS when your access point is operating in **Router Mode**.

WAN

WAN connection details need to be configured in order to connect the router to the Internet.

PEPWAVE	Dashboard	Network	AP	System	Status	Apply Changes								
WAN LAN ■ Network Settings ■ Port Settings VPN	<table border="1"> <thead> <tr> <th>Connection Name</th> <th>Method</th> <th>Routing Mode</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>1. WAN 1</td> <td>DHCP</td> <td>NAT</td> <td>Always-on</td> </tr> </tbody> </table>						Connection Name	Method	Routing Mode	Type	1. WAN 1	DHCP	NAT	Always-on
Connection Name	Method	Routing Mode	Type											
1. WAN 1	DHCP	NAT	Always-on											

To configure a WAN connection, go to **Network > WAN** from the menu and select the desired WAN connection by clicking on its name.

WAN Connection Settings	
WAN Connection Name	WAN 1
Enable	<input checked="" type="checkbox"/>
Connection Method	<input type="text" value="DHCP"/>
Routing Mode	<input checked="" type="radio"/> NAT
Hostname (Optional)	<input type="text"/> <input type="checkbox"/> Use custom hostname
DNS Servers	<input checked="" type="checkbox"/> Obtain DNS server address automatically <input type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/>
Connection Priority	<input checked="" type="radio"/> Always-on (Priority 1) <input type="radio"/> Backup
Independent from Backup WANs	<input type="checkbox"/>
Reply to ICMP Ping	<input checked="" type="radio"/> Yes <input type="radio"/> No
Upload Bandwidth	<input type="text" value="1"/> Gbps
Download Bandwidth	<input type="text" value="1"/> Gbps

WAN Connection Settings

WAN Connection Name Enter a name to represent this WAN connection.

Enable This setting enables the WAN connection. If schedules have been defined, you will be able to select a schedule to apply to the connection.







Connection Method There are three possible connection methods for Ethernet WAN:

- **DHCP**
- **Static IP**
- **PPPoE**

The connection method and details are determined by, and can be obtained from the ISP.

Hostname Provide a hostname for this WAN port if requested by the ISP.

DNS Server	Enter the DNS server address that your access point will use to resolve host names.
Connection Priority	<p>This option allows you to configure the WAN connection, whether for normal daily usage or as a backup connection only.</p> <p>If Always-on is selected, the WAN connection will be kept on continuously, regardless of the priority of other WAN connections.</p> <p>If Backup is selected, the WAN connection will depend on other WAN connections. It will not be used when one or more higher priority dependent WAN connections are connected.</p>
Independent from Backup WANs	If this is checked, the connection will be working independently from other backup WAN connections. WAN connections whose Connection Priority are set to Backup will ignore the status of this WAN connection, and will be used when none of the other higher priority connections are available.
Reply to ICMP Ping	<p>If the checkbox is unticked, this option is disabled and the system will not reply to any ICMP ping echo requests to the WAN IP addresses of this WAN connection.</p> <p>Default: ticked (Yes)</p>
Upload Bandwidth	<p>This field refers to the maximum upload speed.</p> <p>This value is referenced when default weight is chosen for outbound traffic and traffic prioritization. A correct value can result in effective traffic prioritization and efficient use of upstream bandwidth.</p>
Download Bandwidth	This field refers to the maximum download speed. Default weight control for outbound traffic will be adjusted according to this value.

Physical Interface Settings		
Port Speed		Auto 
MTU		<input checked="" type="radio"/> Auto <input type="radio"/> Custom
MSS		<input checked="" type="radio"/> Auto <input type="radio"/> Custom
MAC Address Clone		<input checked="" type="radio"/> Default <input type="radio"/> Custom <input type="text" value="00:1A:DD:7B:67:E0"/>
VLAN		<input type="checkbox"/>

Physical Interface Settings

Port Speed	<p>This is the port speed of the WAN connection. It should be set to the same speed as the connected device in case of any port negotiation problems.</p> <p>When a static speed is set, you may choose whether to advertise its speed to the peer device or not. In this setting, Advertise Speed is selected by default. You can choose not to advertise the port speed if the port has difficulty in negotiating with the peer device.</p>
-------------------	---

The default setting for Port Speed is: **Auto**.

MTU	<p>This field is for specifying the Maximum Transmission Unit value of the WAN connection. An excessive MTU value can cause file downloads to stall shortly after connecting. You may consult your ISP for the connection's MTU value.</p>
------------	--

The default value is 1440.

MSS	<p>This setting should be configured based on the maximum payload size that the local system can handle. The MSS (maximum segment size) is computed from the MTU minus 40 bytes for TCP over IPv4. If the MTU is set to Auto, the MSS will also be set automatically.</p>
------------	--

By default, MSS is set to **Auto**.

MAC Address Clone	<p>Some service providers (e.g. cable providers) identify the client's MAC address and require the client to always use the same MAC address to connect to the network. In such cases, change the WAN interface's MAC address to the original client PC's MAC address via this field. The default MAC address is a unique value assigned at the factory. In most cases, the default value is sufficient. Clicking Default restores the MAC address to the default value.</p>
--------------------------	---

VLAN	<p>Click the square if you wish to enable VLAN functionality for the WAN connection and enable multiple broadcast domains. Once you enable VLAN, you will be able to enter a name for your network.</p>
-------------	---

Health Check Settings

To ensure traffic is routed only to healthy WAN connections, the Pepwave AP can periodically check the health of each WAN connection. The health check settings for each WAN connection can be independently configured via **Network > WAN > *Connection Name* > Health Check Settings**.

Health Check Settings

Health Check Method

This setting specifies the health check method for the WAN connection. This value can be configured as **Disabled**, **PING**, **DNS Lookup**, or **HTTP**. The default method is **DNS Lookup**.

- **Health Check Method: Disabled**



The screenshot shows the 'Health Check Settings' window. The 'Health Check Method' is set to 'Disabled' in a dropdown menu. Below the dropdown, a red error message reads: 'Health Check disabled. Network problems cannot be detected.'

When **Disabled** is chosen in the method field, the WAN connection will always be considered as up. The connection will **NOT** be treated as down in the event of IP routing errors.

- **Health Check Method: PING**




The screenshot shows the 'Health Check Settings' window with the 'Health Check Method' set to 'PING'. Below this, there are two input fields for 'Host 1' and 'Host 2'. A checkbox labeled 'Use first two DNS servers as PING Hosts' is checked.

ICMP ping packets will be issued to test the connectivity with a configurable target IP address or hostname. A WAN connection is considered as up if ping responses are received from either one or both of the ping hosts.

PING Host: This setting specifies IP addresses or hostnames with which connectivity is to be tested via ICMP ping.

If the **Use first two DNS servers as Ping Hosts** is checked, the target ping host will be the first DNS server for the corresponding WAN connection. Reliable ping hosts with a high uptime should be considered. By default, the first two DNS servers of the WAN connection are used as the ping hosts.

- **Health Check Method: DNS Lookup**

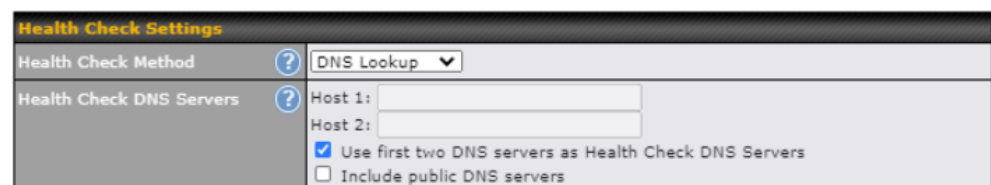

The screenshot shows the 'Health Check Settings' window with the 'Health Check Method' set to 'DNS Lookup'. Below this, there are two input fields for 'Host 1' and 'Host 2'. A checkbox labeled 'Use first two DNS servers as Health Check DNS Servers' is checked, and a checkbox labeled 'Include public DNS servers' is unchecked.

DNS lookups will be issued to test connectivity with target DNS servers. The connection will be treated as up if DNS responses are received from one or both of the servers, regardless of whether the result was positive or negative.

DNS Servers: This field allows you to specify two DNS hosts' IP addresses with which connectivity is to be tested via DNS Lookup.


If the **Use first two DNS servers as Health Check DNS Servers** is checked, the first two DNS servers will be the DNS lookup targets for checking a connection's health. If the box is not checked, **Host 1** must be filled, while a

value for **Host 2** is optional.

If the **Include public DNS servers** is checked and no response is received from all specified DNS servers, DNS lookups will also be issued to some public DNS servers. A WAN connection will be treated as down only if there is also no response received from the public DNS servers.

Connections will be considered as up if DNS responses are received from any one of the health check DNS servers, regardless of a positive or negative result. By default, the first two DNS servers of the WAN connection are used as the health check DNS servers.

- **Health Check Method: HTTP**

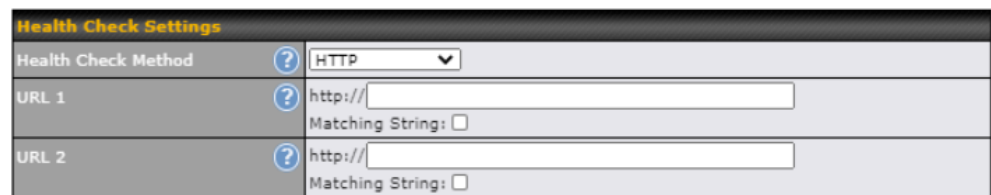

Health Check Settings	
Health Check Method	<input type="text" value="HTTP"/>
URL 1	<input type="text" value="http://"/> Matching String: <input type="checkbox"/>
URL 2	<input type="text" value="http://"/> Matching String: <input type="checkbox"/>

HTTP connections will be issued to test connectivity with configurable URLs and strings to match.


URL 1: The URL will be retrieved when performing an HTTP health check. When **Matching String** is left blank, a health check will pass if the HTTP return code is between 200 and 299 (Note: HTTP redirect codes 301 or 302 are treated as failures).

When **Matching String** is filled, a health check will pass if the HTTP return code is between 200 and 299 and if the HTTP response content contains the string.

URL 2: If URL 2 is also provided, a health check will pass if either one of the tests passed.

Timeout	If a health check test cannot be completed within the specified amount of time, the test will be treated as failed.
Health Check Interval	This is the time interval between each health check test.
Health Check Retries	This is the number of consecutive health check failures before treating a connection as down.
Recovery Retries	This is the number of responses required after a health check failure before treating a connection as up again.

Additional IP Address Settings

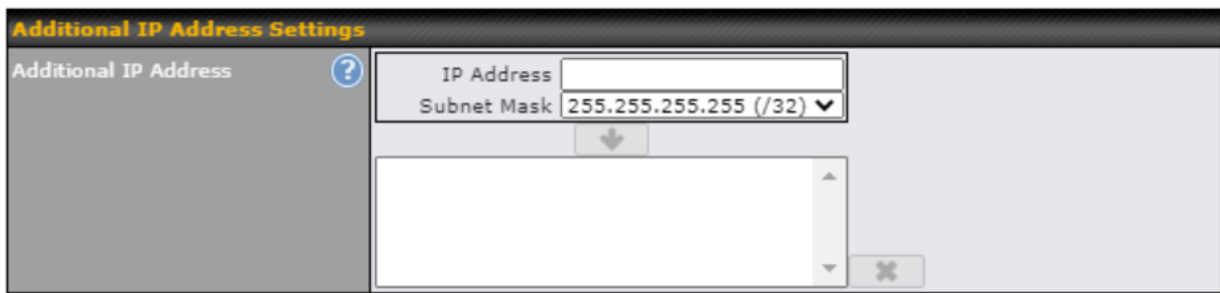

Additional IP Address Settings


Additional IP Address The IP Address list represents the list of fixed Internet IP addresses assigned by the ISP in the event that more than one Internet IP address is assigned to this WAN connection.

Dynamic DNS Settings

Pepwave access points are capable of registering the domain name relationships to dynamic DNS service providers. Through registration with dynamic DNS service provider(s), the default public Internet IP address of each WAN connection can be associated with a host name. With dynamic DNS service enabled for a WAN connection, you can connect to your WAN's IP address from external sources, even if its IP address is dynamic. You must register for an account from the listed dynamic DNS service providers before enabling this option.

If the WAN connection's IP address is a reserved private IP address (i.e. behind a NAT router), the public IP of each WAN will be automatically reported to the DNS service provider.

Either upon a change in IP addresses or every 23 days without link reconnection, the Pepwave router will connect to the dynamic DNS service provider to perform an IP address update within the provider's records.



Dynamic DNS Settings

Service Provider	<p>This setting specifies the dynamic DNS service provider to be used for the WAN based on supported dynamic DNS service providers:</p> <ul style="list-style-type: none"> ◦ changeip.com ◦ dyndns.org ◦ no-ip.org ◦ DNS-O-Matic ◦ Others...
-------------------------	---


When **Others...** is selected, it supports custom Dynamic DNS servers by entering its URL. Works with any service compatible with DynDNS API.

Select **Disabled** to disable this feature.

User ID / Username / Email	This setting specifies the registered user name for the dynamic DNS service.
Password	This setting specifies the password for the dynamic DNS service.
Hosts	This setting specifies a list of hostnames or domains to be associated with the public Internet IP address of the WAN connection.
Update All Hosts	Check this box to automatically update all hosts.

DNS over HTTPS (DoH)

*Please note that the following settings are available only for AP One Rugged (HW2).
You can enable the DoH support in this section.



When this option is enabled, the DNS proxy server will use HTTPS connection to forward DNS requests to the DoH resolver, it will not fallback to traditional UDP DNS.

To configure custom DNS over HTTPS resolver, select Custom URL:, enter resolver URL and IP address.

DNS over HTTPS

Enable When this option is enabled, the DNS proxy server will use HTTPS connections to forward DNS requests to the DoH resolver; it will not fallback to traditional UDP DNS options.

Server The options to configure DoH with a predefined server are:

- Cloudflare – The DNS server IP addresses for **Cloudflare** will be using 1.1.1.1, which is unfiltered.
- Quad9 – The DNS server IP addresses for **Quad9** will be using 9.9.9.9 and 142.112.112.112, which is malware blocking and DNSSEC.
- Google DNS – The DNS server IP addresses for **Google DNS** will be using 8.8.8.8 and 8.8.4.4, which is RFC8484 standard.
- OpenDNS – The DNS server IP addresses for **OpenDNS** will be using 208.67.222.222 and 208.67.220.220, which is standard DNS.
- Custom URL – You may select **Custom URL:**, and enter the **resolver URL** and **IP address**.

WAN Quality Monitoring

This settings advice how WAN Quality information is being gathered.

By default, WAN Quality will always be observed and gathered automatically. With customized choice of WAN connections, the device will always observe WAN Quality of those selected WAN connections. Other WAN connections may stop observing WAN Quality information if it is not necessary for the underlying features.

LAN

Network Settings (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch6-network/lan/network-settings/>)

Port Settings (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch6-network/lan/port-settings/>)

Network Settings

LAN interface settings are located at **Network > LAN > Network Settings**. Navigating to that page will show the following dashboard:

LAN	VLAN	Network	
Untagged LAN	None	192.168.0.3/24	
VLAN1	1	10.10.10.1/24	
New LAN			

Clicking on any of the existing LAN interfaces (or creating a new VLAN) will show the following:

LAN

IP Settings

IP Address

255.255.255.0 (/24) ▼

Network Settings

Name

VLAN ID

Inter-VLAN routing

☒

DHCP Relay Settings

DHCP Relay


☐ Enable

DHCP Server IP Address

DHCP Server 1:

DHCP Server 2:

DHCP Option 82

 ☐

DHCP Relay Logging

☐

Save

Cancel

IP Settings

IP Address Enter the LAN IP address and subnet mask of the Pepwave access point on the LAN.

NetworkSettings

Name Enter a name for the LAN.

VLAN ID Enter a number for your VLAN.

Inter-VLAN routing Check this box to enable routing between virtual LANs.

DHCP Relay Settings

DHCP Relay Check the Enable box to enable the DHCP Relay server.

DHCP Server IP Address Enter the IP addresses of one or two DHCP servers in the provided fields. The DHCP servers entered here will receive relayed DHCP requests from the LAN. For active-passive DHCP server configurations, enter active and passive DHCP server relay IP addresses in **DHCP Server 1** and **DHCP Server 2**.



DHCP Option 82 This feature includes device information as a relay agent for the attached client when forwarding DHCP requests from a DHCP client to a DHCP server. Device MAC address and network name are embedded to circuit ID and Remote ID in option 82.

DHCP Relay Logging Enable logging of DHCP events in the eventlog by selecting the checkbox.

*Please note that the following settings will be available only when your access point is operating in **Router Mode**.

DHCP Server			
DHCP Server	<input checked="" type="checkbox"/> Enable		
DHCP Server Logging	<input type="checkbox"/>		
IP Range	<input type="text"/> - <input type="text"/> 255.255.255.0 (/24) ▼		
Lease Time	<input type="text"/> Days <input type="text"/> Hours <input type="text"/> Mins		
DNS Servers	<input checked="" type="checkbox"/> Assign DNS server automatically		
BOOTP	<input type="checkbox"/>		
Extended DHCP Option	Option		Value
	No Extended DHCP Option		
	Add		
DHCP Reservation	?		
	Name	MAC Address	Static IP
	<input type="text"/>	00:00:00:00:00:00	<input type="text"/> +

DHCP Server Settings

DHCP Server	When this setting is enabled, the DHCP server automatically assigns an IP address to each computer that is connected via LAN and configured to obtain an IP address via DHCP. The Pepwave router's DHCP server can prevent IP address collision on the LAN.
DHCP Server Logging	Enable logging of DHCP events in the eventlog by selecting the checkbox.
IP Range	These settings allocate a range of IP addresses that will be assigned to LAN computers by the Pepwave router's DHCP server.
Lease Time	This setting specifies the length of time throughout which an IP address of a DHCP client remains valid. Upon expiration of the lease time, the assigned IP address will no longer be valid and renewal of the IP address assignment will be required.
DNS Servers	This option allows you to input the DNS server addresses to be offered to DHCP clients. If Assign DNS server automatically is selected, the Pepwave router's built-in DNS server address (i.e. LAN IP address) will be offered.
BOOTP	Check this box to enable BOOTP on older networks that still require it.
Extended DHCP Option	<p>In addition to standard DHCP options (e.g., DNS server address, gateway address, subnet mask), you can specify the value of additional extended DHCP options, as defined in RFC 2132. With these extended options enabled, you can pass additional configuration information to LAN hosts.</p> <p>To define an extended DHCP option, click the Add button, choose the option to define, and then enter its value. For values that are in IP address list format, you can enter one IP address per line in the provided text area input control. Each option can be defined once only.</p>
DHCP Reservation	<p>This setting reserves the assignment of fixed IP addresses for a list of computers on the LAN. The computers to be assigned fixed IP addresses on the LAN are identified by their MAC addresses. The fixed IP address assignment is displayed as a cross-reference list between the computers' names, MAC addresses, and fixed IP addresses.</p> <p>Name (an optional field) allows you to specify a name to represent the device. MAC addresses should be in the format of 00:AA:BB:CC:DD:EE. Click on  to create a new record. Click on  to remove a record. Reserved clients information can be imported from the Client List, located at Status > Client List.</p>

Port Settings

To configure port settings, navigate to **Network > LAN > Port Settings**.

Port Settings				
	Name	Enable	Speed	Advertise Speed
1	LAN Port	<input checked="" type="checkbox"/>	-- Not Configurable --	

On this screen, you can configure the name of the LAN port and enable or disable a specific port.

PepVPN

PepVPN securely connects one or more remote sites to the site running your access point.

*Please note that the following settings will be available only when your access point is operating in **Router Mode**.

PEPWAVE

DashboardNetworkAPSystemStatus

Apply Changes

WAN

LAN

- Network Settings
- Port Settings

VPN

- PepVPN

Inbound Access

- Port Forwarding

NAT Mappings

Captive Portal

QoS

- Bandwidth Control
- Application

Misc. Settings

- RADIUS Server
- Certificate Manager

Logout

PepVPN

AES 256 PW

InControl management enabled. Settings can now be configured on [InControl](#).

Profile	Remote ID	Remote Address(es)	
No VPN Connection Defined			
New Profile			

Send All Traffic To

No PepVPN profile selected

PepVPN Local ID

Local IDAP-One

PepVPN Settings

Link Failure Detection Time

- Recommended (Approx. 15 secs)
- Fast (Approx. 6 secs)
- Faster (Approx. 2 secs)
- Extreme (Under 1 sec)

Shorter detection time incurs more health checks and higher bandwidth overhead

Save

To set up PepVPN, first give your site a local PepVPN ID. To modify an existing local ID,

click on  .

PepVPN Local ID		
Local ID	<input type="text" value="AP_ONE"/>	

Once you've specified a local ID, click the **New Profile** button to configure PepVPN.

Profile	Remote ID	Remote Address(es)	
No VPN Connection Defined			
<input type="button" value="New Profile"/>			

PepVPN Profile		
Name	<input type="text"/>	
Enable	<input checked="" type="checkbox"/>	
Encryption	<input checked="" type="radio"/> 256-bit AES <input type="radio"/> OFF	
Authentication	<input checked="" type="radio"/> Remote ID / Pre-shared Key	
Remote ID / Pre-shared Key	<input type="text" value="Remote ID"/>	<input type="text" value="Pre-shared Key"/>
NAT Mode	<input type="checkbox"/>	
Remote IP Address / Host Names (Optional)	<input type="text"/> <small>If this field is empty, this field on the remote unit must be filled</small>	
Cost	<input type="text" value="10"/>	
Data Port	<input checked="" type="radio"/> Auto <input type="radio"/> Custom <input type="text"/>	
Bandwidth Limit	<input type="checkbox"/>	
Receive Buffer	<input type="text" value="0"/> ms	

WAN Connection Priority	
1. WAN 1	Priority: <input type="text" value="1 (Highest) (Lowest)"/>

PepVPN Profile Settings

Name Enter a name to represent this profile. The name can be any combination of alphanumeric characters (0-9, A-Z, a-z), underscores (_), dashes (-), and/or non-leading/trailing spaces ().

Enable Check this box to enable PepVPN.

Encryption By default, VPN traffic is encrypted with **256-bit AES**. If **Off** is selected on both ends of a VPN connection, no encryption will be applied.

Authentication	Select Remote ID / Pre-shared Key to specify the method your access point will use to authenticate peers. When selecting Remote ID / Pre-shared Key , be sure to enter a unique peer ID number in the Remote ID field.
Remote ID / Pre-shared Key	<p>This optional field becomes available when Remote ID / Pre-shared Key is selected as the Pepwave access point's VPN Authentication method, as explained above. Pre-shared Key defines the pre-shared key used for this particular VPN connection.</p> <p>The VPN connection's session key will be further protected by the pre-shared key. The connection will be up only if the pre-shared keys on each end match.</p>
NAT Mode	Check this box to allow the local DHCP server to assign an IP address to the remote peer. When NAT Mode is enabled, all remote traffic over the VPN will be tagged with the assigned IP address using network address translation.
Remote IP Address / Host Names (Optional)	<p>If NAT Mode is not enabled, you can enter a remote peer's WAN IP address or hostname(s) here. If the remote peer uses more than one address, enter only one of them here. Multiple hostnames are allowed and can be separated by a space character or carriage return. Dynamic-DNS host names are also accepted.</p> <p>This field is optional. With this field filled, the Peplink Balance will initiate connection to each of the remote IP addresses until it succeeds in making a connection. If the field is empty, the Peplink Balance will wait for connection from the remote peer. Therefore, at least one of the two VPN peers must specify this value. Otherwise, VPN connections cannot be established.</p>
Cost	<p>Define path cost for this profile. OSPF will determine the best route through the network using the assigned cost.</p> <p>Default: 10</p>
Data Port	This field specifies the outgoing UDP port number for transporting VPN data. If Default is selected, port 4500 will be used by default. Port 32015 will be used if port 4500 is unavailable. If Custom is selected, you can input a custom outgoing port number between 1 and 65535.
Bandwidth Limit	Define maximum download and upload speed to each individual peer. This functionality requires the peer to use PepVPN version 4.0.0 or above.

Receive Buffer


Receive Buffer can help to reduce out-of-order packets and jitter, but will introduce extra latency to the tunnel.


Default is 0 ms, which disables the buffer, and the maximum buffer size is 2000 ms.

WAN Connection Priority


WAN Connection Priority


If your device supports it, you can specify the priority of WAN connections to be used for making VPN connections. WAN connections set to **OFF** will never be used. Only available WAN connections with the highest priority will be used.

To enable asymmetric connections, connection mapping to remote WANs, cut-off latency, and packet loss suspension time, click the  button.



Send All Traffic To

This feature allows you to redirect all traffic to a specified PepVPN connection. Click the  button to select your connection and the following menu will appear:

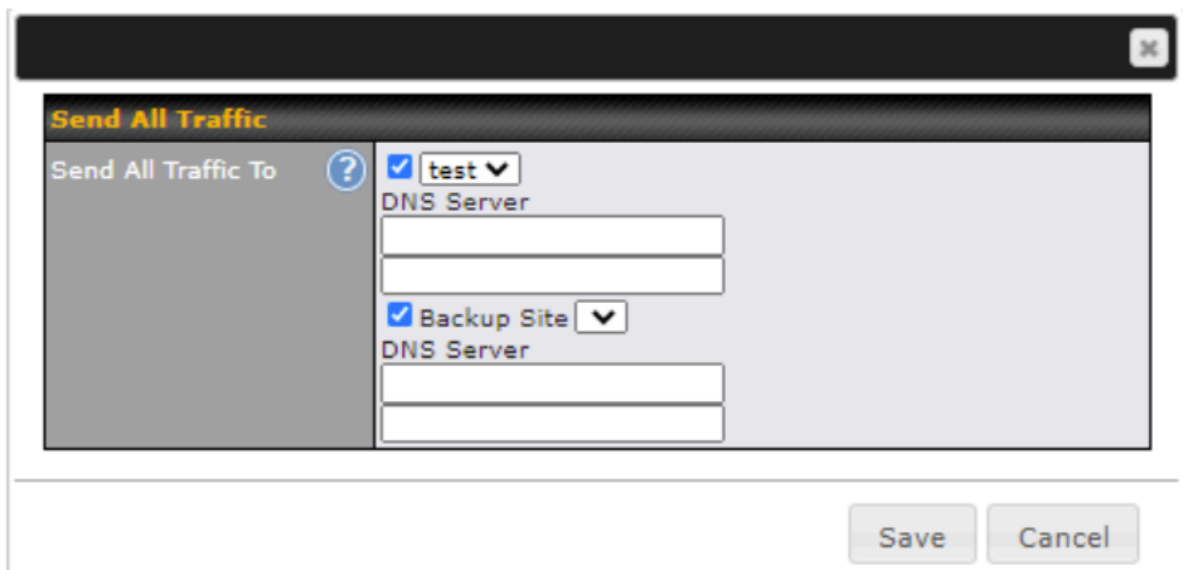

You could also specify a DNS server to resolve incoming DNS requests. Check the box next to **Backup Site** to designate a backup SpeedFusion profile that will take over should the main PepVPN connection fail.

The screenshot shows a window titled "PepVPN Settings" with a question mark icon in the top right corner. The "Link Failure Detection Time" section is highlighted with a grey background and a question mark icon. It contains four radio button options: "Recommended (Approx. 15 secs)" (selected), "Fast (Approx. 6 secs)", "Faster (Approx. 2 secs)", and "Extreme (Under 1 sec)". Below these options is a note: "Shorter detection time incurs more health checks and higher bandwidth overhead". A "Save" button is located at the bottom right of the settings area.

Link Failure Detection Time

Link Failure Detection Time

The bonded VPN can detect routing failures on the path between two sites over each WAN connection. Failed WAN connections will not be used to route VPN traffic. Health check packets are sent to the remote unit to detect any failure. The more frequently checks are sent, the shorter the detection time, although more bandwidth will be consumed.

When **Recommended** (default) is selected, a health check packet is sent every five seconds, and the expected detection time is 15 seconds.

When **Fast** is selected, a health check packet is sent every three seconds, and the expected detection time is six seconds.

When **Faster** is selected, a health check packet is sent every second, and the expected detection time is two seconds.

When **Extreme** is selected, a health check packet is sent every 0.1 second, and the expected detection time is less than one second.

Inbound Access

*Please note that the following settings will be available only when your access point is operating in **Router Mode**.

Port Forwarding

Pepwave access points can act as a firewall that blocks, by default, all inbound access from the Internet. Inbound port forwarding rules can be defined at **Network > Inbound Access > Port Forwarding**.

PEPWAVE

Dashboard

Network

AP

System

Status

Apply Changes

WAN

LAN

■ Network Settings

■ Port Settings

VPN

■ PepVPN

Inbound Access

■ Port Forwarding

Service	IP Address(es)	Server	Protocol
No Services Defined			
Add Service			

To define a new service, click **Add Service**.

Port Forwarding

Enable

☒

Service Name

Protocol

TCP ⌵ ⬅ :: Protocol Selection :: ⌵

Port

Any Port ⌵

Inbound IP Address(es)
(Require at least one IP address)

Connection / IP Address(es)

All Clear

☐ WAN 1
☐ PepVPN

Server IP Address

Save

Cancel

Port Forwarding Settings

Enable	Check the box to enable the port forwarding profile for Inbound Access.
Service Name	This setting identifies the service to the system administrator. Valid values for this setting consist of only alphanumeric and underscore "_" characters.
Protocol	<p>The Protocol setting, along with the Port setting, specifies the protocol of the service as TCP, UDP, ICMP, or IP. Traffic that is received by the Pepwave access point via the specified protocol at the specified port(s) is forwarded to the LAN hosts specified by the server setting. Please see below for details on the Port and server settings.</p> <p>Alternatively, the Protocol Selection Tool drop-down menu can be used to automatically fill in the protocol and a single port number of common Internet services (e.g., HTTP, HTTPS, etc.). After selecting an item from the Protocol Selection Tool drop-down menu, the protocol and port number remain manually modifiable.</p>

Port The **Port** setting specifies the port(s) that correspond to the service, and can be configured to behave in one of the following manners:

Port

Any Port

Any Port: all traffic that is received by the Pepwave router via the specified protocol is forwarded to the server specified by the server setting. For example, with **IP Protocol** set to **TCP**, and **Port** set to **Any Port**, all TCP traffic is forwarded to the configured servers.

Port

Single Port

Port: 80

Single Port: traffic that is received by the Pepwave router via the specified protocol at the specified port is forwarded via the same port to the server specified by the server setting. For example, with **IP Protocol** set to **TCP**, **Port** set to **Single Port**, and the port set to 80, TCP traffic received on port 80 is forwarded to the configured servers via port 80.

Port

Port Range

Port: 80 - 88

Port Range: traffic that is received by the Pepwave router via the specified protocol at the specified port range is forwarded via the same respective ports to the LAN hosts specified by the server setting. For example, with **IP Protocol** set to **TCP**, **Port** set to **Port Range**, and the port range set to 80-88, TCP traffic received on ports 80 through 88 is forwarded to the configured servers via the respective ports.

Port

Port Mapping

Port: 80

Map to: 88

Port Mapping: traffic that is received by Pepwave router via the specified protocol at the specified port is forwarded via a different port to the servers specified by the server setting. For example, with the **IP Protocol** set to **TCP**, the **Port** set to **Port Mapping**, the port set to 80, and the **Map to Port** set to 88, TCP traffic on port 80 is forwarded to the configured servers via port 88.

Port

Range Mapping

Port: 80 - 88

Map to: 90 - 98


Range Mapping: traffic that is received by the Pepwave router via the specified protocol at the specified port range is forwarded via a different port to the servers specified by the server setting.

Inbound IP Address(es)	This setting specifies the WAN connections and Internet IP address(es) from which the service can be accessed.
Server IP Address	This setting specifies the LAN IP address of the server that handles the requests for the service.

NAT Mapping

NAT mappings allow IP address mapping of all inbound and outbound NAT'd traffic to and from an internal client IP address. Settings to configure NAT mappings are located at **Network > NAT Mappings**.

*Please note that the following settings will be available only when your access point is operating in **Router Mode**.

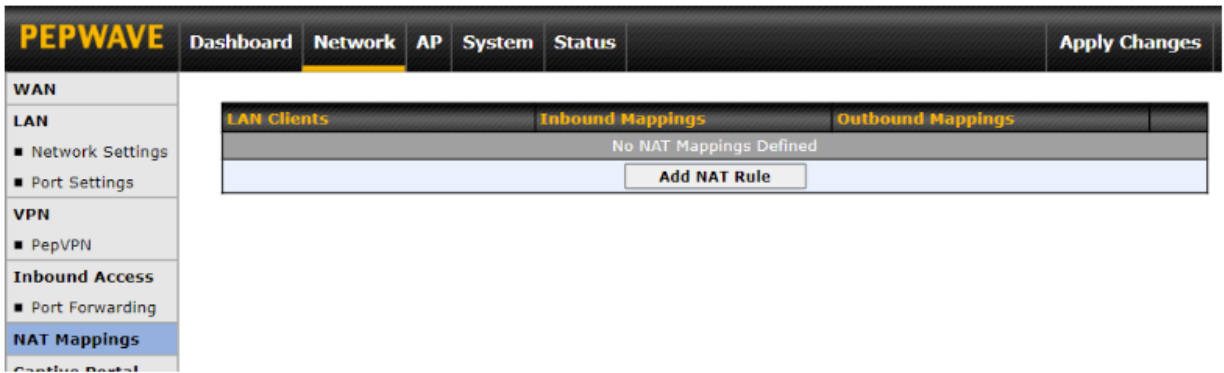

To add a rule for NAT mappings, click **Add NAT Rule**.

NAT Mappings

LAN Client(s)

?

IP Address

Address

?

Inbound Mappings

?

Connection / Inbound IP Address(es)

WAN 1

PepVPN

Outbound Mappings

?

Connection / Outbound IP Address

WAN 1

192.168.52.115 (Interface IP)

Save

Cancel

NAT Mapping Settings

LAN Client(s)	NAT mapping rules can be defined for a single LAN IP Address , an IP Range , or an IP Network .
Address	This is the IP address of the LAN host where the system will map the selected connection IP addresses.
Inbound Mappings	This section is to define which inbound IP addresses should be forwarded to the LAN Client(s) .

Outbound Mappings

This section is to define which IP addresses of each WAN should be used when an IP connection is made from the LAN host to the Internet.

Captive Portal

The screenshot shows the Peplink router's web interface. The top navigation bar includes 'Dashboard', 'Network' (selected), 'AP', 'System', 'Status', and 'Apply Changes'. The left sidebar lists various configuration sections: WAN, LAN, Network Settings, Port Settings, VPN, PepVPN, Inbound Access, Port Forwarding, NAT Mappings, and Captive Portal (highlighted). The main content area displays a message: 'InControl management enabled. Settings can now be configured on InControl.' Below this is a table for Captive Portals. The table has columns for 'Captive Portal', 'Access Mode', and 'Info'. A single portal named 'Portal' is listed with 'Open Access' mode and a quota of '30 mins, Reset at 00:00'. A 'New Portal' button is located below the table.

Captive Portal	Access Mode	Info
Portal	Open Access	Quota: 30 mins, Reset at 00:00

[New Portal](#)

The captive portal serves as a gateway that clients have to pass if they wish to access the Internet using your router. To configure the captive portal, navigate to **Network > Captive Portal**.

The screenshot shows the 'Captive Portal' configuration page. It is divided into two main sections: 'General Settings' and 'Portal Access Settings'.

General Settings

Name	Portal
Enable	<input type="checkbox"/>
Hostname	<input type="text" value="captive-portal.peplink.com"/> Default
Access Mode	<input checked="" type="radio"/> Open Access <input type="radio"/> User Authentication <input type="radio"/> External Server

Portal Access Settings

Access Quota	<input type="text" value="30"/> mins (0: Unlimited) <input type="text" value="0"/> MB (0: Unlimited)
Quota Reset Time	<input checked="" type="radio"/> Daily at <input type="text" value="00"/> :00 <input type="radio"/> 1440 minutes after quota reached
Inactive Timeout	<input type="text" value="0"/> minutes (0: No Timeout)
Allowed Networks	<input type="text" value="Domain Name / IP Address / Network"/> +
Allowed Clients	<input type="text" value="MAC / IP Address / Host Identifier"/> +
Splash Page	<input checked="" type="radio"/> Built-in <input type="radio"/> External, URL: <input type="text" value="http://"/>
Popup Handling	<input type="checkbox"/> Bypass Popup (Redirection only takes place on normal browser) <input type="checkbox"/> Automatically show splash page on Safari for Apple (iOS / macOS) devices
Logout Hostname	<input type="text" value="(Not configured)"/>

Click [here](#) to preview / customize built-in splash page

Captive Portal Settings

Name Enter a name for the Captive Portal Profile.

Enable Check the **Enable** box to turn on your access point's built-in captive portal functionality.

Hostname To customize the portal's form submission and redirection URL, enter a new URL in this field.

Access Mode **Open Access** allows clients to freely access your router. **User Authentication** forces your clients to authenticate before accessing your router. **External Server** uses the captive portal with HotSpotSystem or CoovaChilli.

As described in the following knowledgebase article:

<https://forum.peplink.com/t/using-hotspotsystem-wi-fi-on-pepwave-max-routers/> (<https://forum.peplink.com/t/using-hotspotsystem-wi-fi-on-pepwave-max-routers/>)





User Authentication This authenticates your clients through a RADIUS server. After selecting this option, you will see the following fields:

Fill in the necessary information to complete your connection to the server and enable authentication.


RADIUS Settings	Primary Server	Secondary Server
	You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles	
Authentication Host	<input type="text"/>	<input type="text"/>
Authentication Port	<input type="text" value="1812"/>	<input type="text" value="1812"/>
Authentication Secret	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
	You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles	
Accounting Host	<input type="text"/>	<input type="text"/>
Accounting Port	<input type="text" value="1813"/>	<input type="text" value="1813"/>
Accounting Secret	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
CoA-DM	<input type="checkbox"/>	
Accounting Interim Interval	<input type="text"/>	
NAS-Identifier	<input type="text" value="Device Name"/>	

Access Quota Enter a value in minutes to limit access time on a given login or enter **0** to allow unlimited use time on a single login. Likewise, enter a value in MB for the total bandwidth allowed or enter **0** to allow unlimited bandwidth on a single login.

Quota Reset Time This menu determines how your usage quota resets. Setting it to **Daily** will reset it at a specified time every day. Setting a number of **minutes after quota reached** establishes a timer for each user that begins after the quota has been reached.

Inactive Timeout	Enter a value in minutes to logout following the specified period of inactivity or enter 0 to disable inactivity logouts.
Allowed Networks	To whitelist a network, enter the domain name / IP address here and click the  . To delete an existing network from the list of allowed networks, click the  button next to the listing.
Allowed Clients	<p>To whitelist a client, enter the MAC address / IP address here and click the  .</p> <p>To delete an existing client from the list of allowed clients, click the  button next to the listing.</p>
Splash Page	Here, you can choose between using the Pepwave access point's built-in captive portal or redirecting clients to a URL that you define.
Popup Handling	Configurable options for popup handling: <ul style="list-style-type: none">◦ Bypass popup (redirection only takes place on a normal browser)◦ Automatically show splash page on Safari for Apple (iOS / macOS) devices
Logout Hostname	A hostname that can be used to logout captive portal when being accessed on the browser.
Customize splash page	Click on the provided link in the Captive Portal Profile to customize the splash page. A new browser tab with a WYSIWYG editor of the splash page will be opened. To edit the content, switch Edit Mode on and select the corresponding elements to edit.

Captive Portal



☒ Use default Logo Image
☐ Choose File No file chosen

NOTE: Size max 512KB. Supported images types: JPEG, PNG and GIF.

EMPTY STRING

☒ I have read and agree to the [terms and conditions](#) ?

You must accept the terms and conditions before you can proceed

Agree

Powered by Pepwave.

Portal Configuration

Show Quota Status	<input checked="" type="checkbox"/>
Custom Landing Page	<input type="checkbox"/>

Page:

Login ▼
 Login
 TNC
 Success
 Quota reached

Edit mode ON

ON

?

Save

QoS

*Please note that the following settings will be available only when your access point is operating in **Router Mode**.


User Group

*Please note that the following settings are available only for **AP One Rugged (HW2)**.


LAN and PPTP clients can be categorized into three user groups – **Manager**, **Staff**, and **Guest**. This table allows you to define rules and assign client IP addresses or subnets to a user group. You can apply different bandwidth and traffic prioritization policies on each user group in the

Bandwidth Control and Application sections.

The table is automatically sorted, and the table order signifies the rules' precedence. The smaller and more specific subnets are put towards the top of the table and have higher precedence; larger and less specific subnets are placed towards the bottom.

Click the Add button to define clients and their user group. Click the  button to remove the defined rule.

Two default rules are pre-defined and put at the bottommost. They are **All DHCP reservation clients** and **Everyone**, and they cannot be removed. **All DHCP reservation clients** represents the LAN clients defined in the DHCP Reservation table in the LAN settings page. **Everyone** represents all clients that are not defined in any rule above. Click on a rule to change its group.

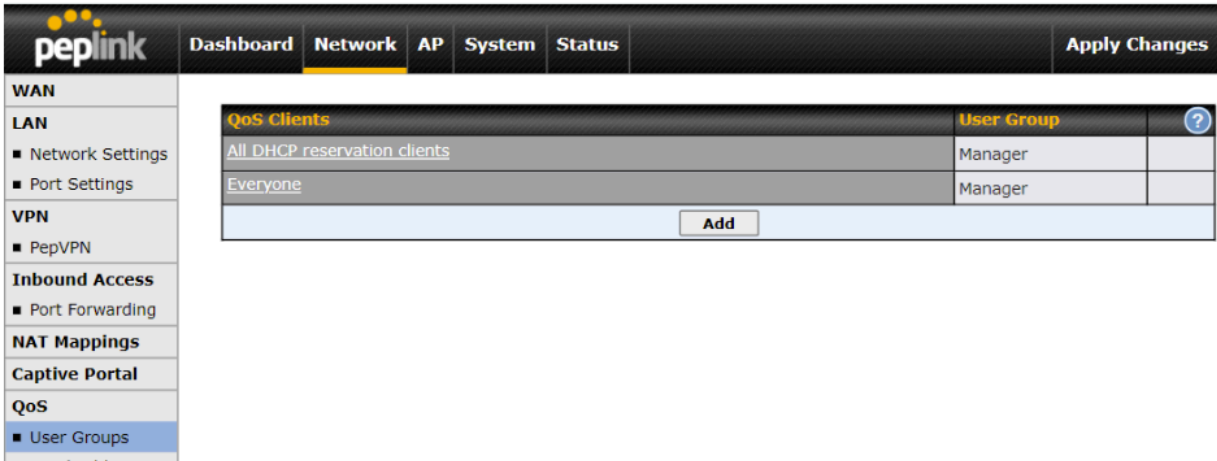

Add / Edit User Group

Subnet / IP Address	From the drop-down menu, choose whether you are going to define the client(s) by an IP Address or a Subnet . If IP Address is selected, enter a name defined in DHCP reservation table or a LAN client's IP address. If Subnet is selected, enter a subnet address and specify its subnet mask.
User Group	This field is to define which User Group the specified subnet / IP address belongs to.

Once users have been assigned to a user group, their internet traffic will be restricted by rules defined for that particular group. Please refer to the following two sections for details.

Bandwidth Control

Group Bandwidth Reservation

Individual Bandwidth Limit

Application

Group Bandwidth Reservation

*Please note that the following settings are available only for **AP One Rugged (HW2)**.

This section is to define how much minimum bandwidth will be reserved to each user group when a WAN connection is in **full load**. When this feature is enabled, a slider with two indicators will be shown. You can move the indicators to adjust each group’s weighting. The lower part of the table shows the corresponding reserved download and uploads bandwidth value of each connection.

By default, **50%** of bandwidth has been reserved for Manager, **30%** for Staff, and **20%** for Guest.

Group Bandwidth Reservation				
Enable		<input checked="" type="checkbox"/>		
Bandwidth %	Manager	Staff	Guest	
	50%	30%	20%	
	WAN 1	500.00 Mbps 500.00 Mbps	300.00 Mbps 300.00 Mbps	200.00 Mbps 200.00 Mbps

Individual Bandwidth Limit

The default download and upload limits are set to unlimited (set as 0). This can be changed as necessary to restrict the speeds to individual devices connected to the router, no matter if they are wired or wireless. Note that this limit is applied to all connected devices.

PEPWAVE
Dashboard
Network
AP
System
Status
Apply Changes

WAN
LAN
Network Settings
Port Settings
VPN
PepVPN
Inbound Access
Port Forwarding
NAT Mappings
Captive Portal
QoS
Bandwidth Control

Individual Bandwidth Limit

Enable

☒

User Bandwidth Limit

Download
0
Mbps
Upload
0
Mbps
(0: Unlimited)

Save

Application

You can choose whether to apply the same prioritization settings to all user groups or customize the settings for each group.

peplink
Dashboard
Network
AP
System
Status
Apply Changes

WAN
LAN
Network Settings
Port Settings


Application Prioritization

☒ Apply same settings to all users
☐ Customize

Define the priority level of selected applications. Available priorities are **↑ High**, **— Normal**, and **↓ Low**. Applications not defined in the table are assigned a “Normal” priority level.


Pepwave access points can detect various application traffic by inspecting the packets’ content. Select an application by choosing a supported application, or by manually defining a custom application. The priority preference of supported applications is placed at the top of the table. Custom applications are at the bottom.

Application	Priority
No Applications Defined	
Add	

Click the **Add** button to define a custom application. Click the  button in the Action column to delete the custom application in the corresponding row.

Application	Manager	Staff	Guest	
All Supported Streaming Applications	↑ High	— Normal	↓ Low	
Apple Game Center	— Normal	↓ Low	↑ High	
MySQL	↓ Low	↑ High	— Normal	
Add				

When **Supported Applications** is selected, the Pepwave access point will inspect network traffic and prioritize the selected applications. Alternatively, you can select **Custom Applications** and define the application by providing the protocol, scope, port number, and DSCP value.

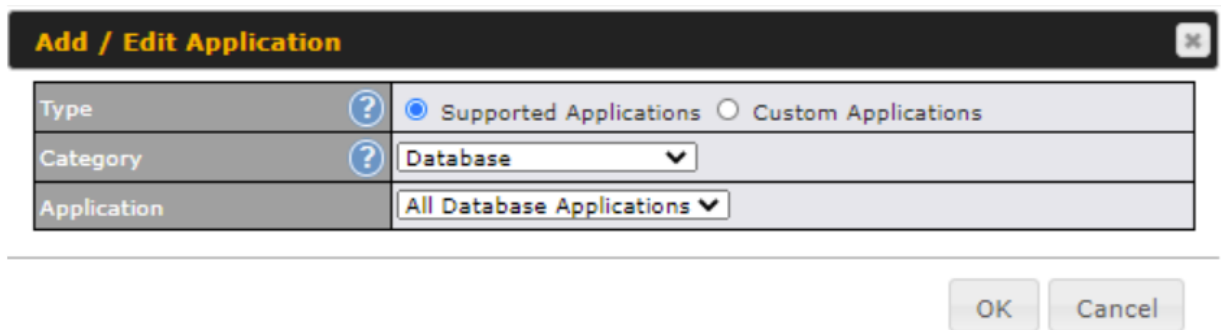


The dialog box titled "Add / Edit Application" has a close button in the top right corner. It contains three rows of controls:

Type	<input checked="" type="radio"/> Supported Applications <input type="radio"/> Custom Applications
Category	Database ▼
Application	All Database Applications ▼

At the bottom right are "OK" and "Cancel" buttons.

DSL / Cable Optimization



The "DSL/Cable Optimization" section has a help icon in the top right corner. It contains a single row with the label "Enable" and an unchecked checkbox.

DSL/cable-based WAN connections normally have their upload bandwidth set lower than their download bandwidth. When a DSL/cable circuit's uplink is congested, the download bandwidth will be affected. Users will not be able to download data at full speed until the uplink becomes less congested. The **DSL/Cable Optimization** can relieve such issues. When it is enabled, the download speed will be less affected by the upload traffic.

PepVPN Traffic Optimization

Check the box to enable PepVPN traffic to have the highest priority when the WAN is congested.

Misc. Settings

Radius Server (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch6-network/misc-settings/radius-server/>)

Certificate Manager (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch6-network/misc-settings/certificate-manager/>)

Radius Server

RADIUS Server settings are located at **Network > Misc. Settings > RADIUS Server**.

PEP WAVE

Dashboard
Network
AP
System
Status

Apply Changes

WAN

LAN

Network Settings
Port Settings

Captive Portal

Misc. Settings

RADIUS Server
Certificate Manager

Authentication Server	Host	Port
No server profiles defined		
New Profile		

Accounting Server	Host	Port
No server profiles defined		
New Profile		

Click **New Profile** to display the following screen:

Authentication Server

Name	<input type="text"/>
Host	<input type="text"/>
Port	1812
Secret	<input type="text"/>

☒ Hide Characters

Save

Cancel

Authentication Server

Name This field is for specifying a name to represent this profile.

Host Specifies the IP address or hostname of the RADIUS server host.

Port This setting specifies the UDP destination port for authentication requests. By default, the port number is 1812.

Secret This field is for entering the secret key for communicating to the RADIUS server.

Accounting Server

Name	<input type="text"/>
Host	<input type="text"/>
Port	1813
Secret	<input type="text"/>

☒ Hide Characters

Save

Cancel

Accounting Server

Name	This field is for specifying a name to represent this profile.
Host	Specifies the IP address or hostname of the RADIUS server host.
Port	This setting specifies the UDP destination port for authentication requests. By default, the port number is 1813.
Secret	This field is for entering the secret key for communicating to the RADIUS server.

Certificate Manager

This section allows for certificates to be assigned to the Web Admin SSL, Captive Portal SSL and Wi-Fi WAN (Client and CA).

The following knowledge base article describes how to create self-signed certificates and import it to a Peplink Product.

<https://forum.peplink.com/t/how-to-create-a-self-signed-certificate-and-import-it-to-a-peplinkproduct/> (<https://forum.peplink.com/t/how-to-create-a-self-signed-certificate-and-import-it-to-a-peplinkproduct/>)

Ignition Sensing


The GPIO and Ignition sensing feature are supported by AP One Rugged (HW2).

Ignition Sensing detects the ignition signal status of a vehicle it is installed in.


This feature allows the cellular router to start up or shut down when the engine of that vehicle is started or turned off.

The time delay setting between ignition off and power down of the router is a configurable setting, which allows the router to stay on for a period of time after the engine of a vehicle is turned off.


Ignition Sensing installation

	Function	Colour Wire
	I/O Digital Input/Digital Output/ Analog Input	Brown
	IGN I/P Digital Input / Ignition Sensing	Orange
	DC IN - connected to permanent negative feed (ground)	Black
	DC IN + connected to permanent positive feed (power)	Red

Connectivity diagram for devices with 4-pin connector

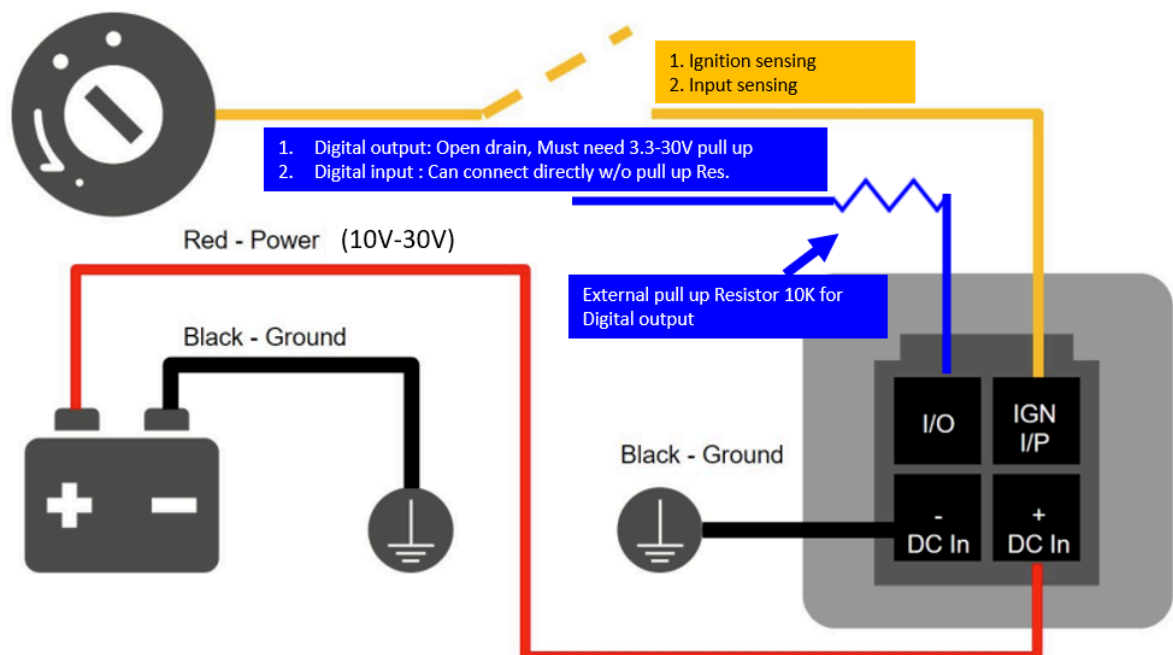

Connectivity diagram for devices with terminal block connection

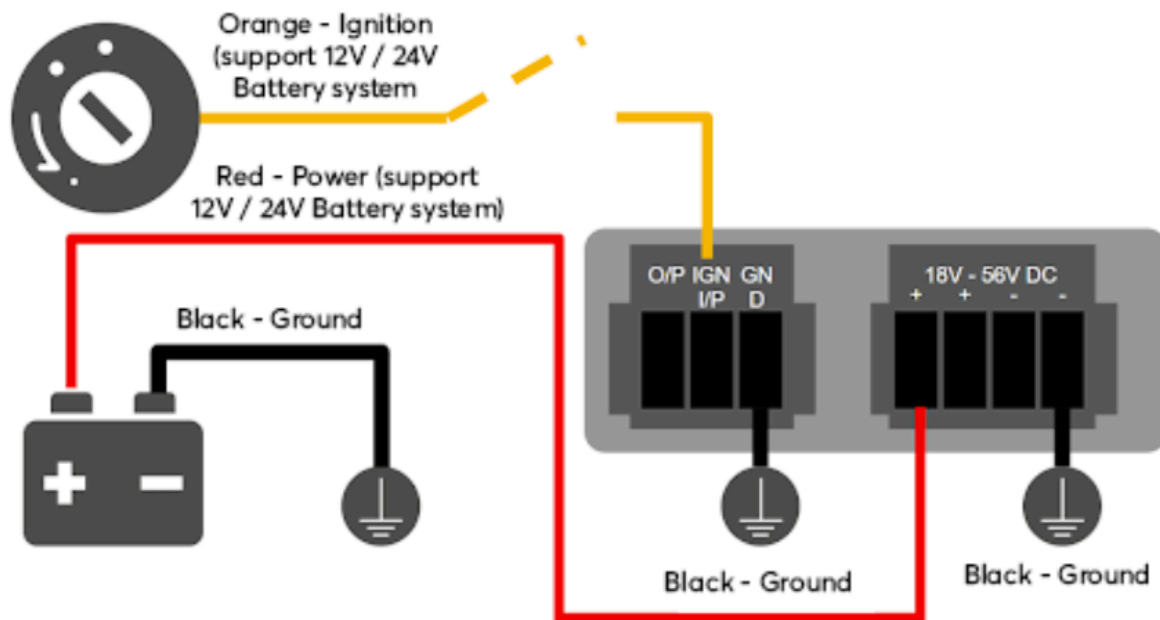

GPIO Menu

Note: This feature is applicable for certain models that come with a GPIO interface.

Ignition Sensing options can be found in **Advanced > GPIO**.

The configurable option for Ignition Input is **Delay**; the time in seconds that the router stays powered on after the ignition is turned off.

- a.) Ignition sensing: 9-30V active high for IGN purpose
- b.) Input Sensing: I/O input

IGN I/P	
Enable	<input checked="" type="checkbox"/>
Type	Digital Input ▾
Mode	Input Sensing ▾
Delay	<input type="text"/> seconds

The O/P (connected to the I/O pin on a 4 pin connector) can be configured as a digital input, a digital output, or an analog input.

Digital Input – the connection supports input sensing; it reads the external input and determines if the settings should be 'High' (on) or 'Low' (off).

Digital Output – when there is a healthy WAN connection, the output pin is marked as ‘High’ (on). Otherwise, it will be marked as ‘Low’ (off).

a.) Digital output:

Open drain for IO output. It is required to add an external pull up resistor of 10K for 3.3-30V pull up voltage.

(DO NOT exceed 250mA)

3.3-30V active high, 0.05-0.5V active low(mapping to 3.3-30V pull up voltage)

b.) Digital input: I/O input

I/O	
Enable	<input checked="" type="checkbox"/>
Type	Digital Output ▾
Mode	Toggle Low ▾

Note: The Digital Output state (on/off) upon rebooting the device may vary depending on the model, eg. MAX BR1 MK2 = Persistent; MAX Transit Mini with ContentHub = Reset to default, etc.

Analog Input – to be confirmed. In most cases, it should read the external input and determine the voltage level.

Ch7. AP Tab

AP (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/ap/>)

Status (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/>)

AP

Use the controls on the **AP** tab to set the wireless SSID, AP settings and Mesh, as well as wireless distribution system (WDS) settings.

Wireless SSID

PEP WAVE

Dashboard
Network
AP
System
Status

Apply Changes

AP

Wireless SSID

WDS

Wireless Mesh

Settings

Status

InControl management enabled. Wireless SSID can now be configured on [InControl](#).

SSID	Security Policy	
PEPWAVE_2E8A	WPA2 - Personal	
<div>New SSID</div>		

Wireless network settings, including the name of the network (SSID) and security policy, can be defined and managed in this section.

Click **New SSID** to create a new network profile, or click the existing network profile to modify its settings.

SSID Settings

?

SSID	<input type="text"/>
Enable	Always on
VLAN	<input type="text"/> (0: Untagged) <input type="checkbox"/> Use VLAN Pool
Broadcast SSID	<input checked="" type="checkbox"/>
Data Rate	<input checked="" type="radio"/> Auto <input type="radio"/> Fixed <input type="radio"/> Minimum
Multicast Filter	<input type="checkbox"/>
Multicast Rate	MCS8/MCS0/6M
IGMP Snooping	<input type="checkbox"/>
Layer 2 Isolation	<input type="checkbox"/>
Maximum number of clients	2.4 GHz: <input type="text"/> 5 GHz: <input type="text"/> (0: Unlimited)
Band Steering	<div>?</div> Disable


SSID Settings

SSID This setting specifies the router's SSID that Wi-Fi clients will see when scanning for Wi-Fi signals..

Enable Click the drop-down menu to choose predefined schedules as your starting point. Please note that upon selection, previous changes on the schedule map will be deleted.

VLAN This setting specifies the VLAN ID to be tagged on all outgoing packets generated from this wireless network (i.e. packets that travel from the Wi-Fi segment through your access point to the ethernet segment via the LAN port). If 802.1x is enabled and a per-user VLAN ID is specified in the authentication reply from the Radius server, then the value specified by the default VLAN ID will be overridden. The default value of this setting is **0**, which means that VLAN tagging is disabled (instead of tagged with zero).

If **Use VLAN Pool** is enabled, enter the VLAN pool value specified in VLAN.

Broadcast SSID	This setting specifies whether or not Wi-Fi clients can scan the SSID of this wireless network. Broadcast SSID is enabled by default.
Data Rate	Select Auto to allow your access point to set the data rate automatically, or select Fixed or Minimum to choose a set rate from a drop-down menu.
Multicast Filter	This setting enables the filtering of multicast network traffic to the wireless SSID.
Multicast Rate	This setting specifies the transmit rate to be used for sending multicast network traffic.
IGMP Snooping	To allow your access point to convert multicast traffic to unicast traffic for associated clients, select this option.
Layer 2 Isolation	<p>Layer 2 refers to the second layer in the ISO Open System Interconnect model. When this option is enabled, it will block communication between Wi-Fi clients within the same VLAN, SSID or subnet, as a security measure that best suits a company Guest/Visitor Wi-Fi access scenario.</p> <p>Do refer to this link (https://forum.peplink.com/t/lan-isolation-with-balance30-and-ap-one-ac-minihelp-needed/3914/4) for visual illustration of the feature. By default, the setting is disabled.</p>
Maximum Number of Clients	Enter the maximum number of clients that can simultaneously connect to your access point, or enter 0 to allow unlimited Wi-Fi clients.
Band Steering	<p>This setting, shown below, allows you to reduce 2.4 GHz band overcrowding, AP with band steering steers clients capable of 5 GHz operation to 5 GHz frequency.</p> <p>Force – Clients capable of 5 GHz operation are only offered with 5 GHz frequency.</p> <p>Prefer – Clients capable of 5 GHz operation are encouraged to associate with 5 GHz frequency. If the clients insist to attempt on 2.4 GHz frequency, 2.4 GHz frequency will be offered.</p> <p>Default: Disable</p> 

Security Settings	
Security Policy	Open (No Encryption) ▼

Security Settings

Security Policy

This setting configures the wireless authentication and encryption methods. Available options are:

- **Open (No Encryption)**
- **Enhanced Open (OWE)**
- **WPA3 – Personal (AES:CCMP)**
- **WPA3 – Enterprise (AES:CCMP)**
- **WPA2/WPA3 – Personal (AES:CCMP)**
- **WPA2 – Personal (AES:CCMP)**
- **WPA2 – Enterprise (AES:CCMP)**
- **WPA/WPA2 – Personal (TKIP/AES: CCMP)**
- **WPA/WPA2 – Enterprise (TKIP/AES: CCMP)**



To allow any Wi-Fi client to access your AP without authentication, select **Open (No Encryption)**. Details on each of the available authentication methods follow.

Security Settings	
Security Policy	Enhanced Open (OWE) ▼
Transition Mode	 <input checked="" type="checkbox"/>

Enhanced Open (OWE)

Transition Mode

With the option enabled, legacy clients will be able to connect in Open mode. With the option disabled, legacy clients will not be able to connect. OWE-supported clients will always connect in OWE mode.

Security Settings	
Security Policy	WPA3 - Personal ▼
Encryption	AES:CCMP
Shared Key	 <input type="text"/> <input checked="" type="checkbox"/> Hide Characters
Fast Transition	 <input type="checkbox"/>

WPA3 – Personal

Shared Key Enter a passphrase of between 8 and 63 alphanumeric characters to create a passphrase used for data encryption and authentication. Click **Hide / Show Characters** to toggle visibility.

Fast Transition Fast Transition
[802.11r] When this option is ticked, the transition process of a mobile client is improved as it moves between access points.

Security Settings	
Security Policy	WPA3 - Enterprise ▼
Encryption	AES:CCMP
802.1X Version	<input checked="" type="radio"/> v1 <input type="radio"/> v2
Fast Transition	<input type="checkbox"/>

WPA3 - Enterprise

802.1X Version Choose **v1** or **v2** of the 802.1x EAPOL. When **v1** is selected, both v1 and v2 clients can associate with the access point. When **v2** is selected, only v2 clients can associate with the access point. Most modern wireless clients support v2. For stations that do not support v2, select **v1**. The default is **v2**.

Fast Transition Fast Transition
[802.11r] When this option is ticked, the transition process of a mobile client is improved as it moves between access points.

Security Settings	
Security Policy	WPA2/WPA3 - Personal ▼
Encryption	AES:CCMP
Shared Key	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
Management Frame Protection	Default (Optional) ▼
Fast Transition	<input type="checkbox"/>

WPA2/WPA3 - Personal

Shared Key Enter a passphrase of between 8 and 63 alphanumeric characters to create a passphrase used for data encryption and authentication. Click **Hide / Show Characters** to toggle visibility.

Management Frame Protection This feature protects stations against forged management frames spoofed from other devices. Frames that are protected include Disassociation, Deauthentication and QoS Action.

Fast Transition

Fast Transition

[802.11r] When this option is ticked, the transition process of a mobile client is improved as it moves between access points.

Security Settings	
Security Policy	WPA2 - Personal ▼
Encryption	AES:CCMP
Shared Key	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
Management Frame Protection	Default (Disabled) ▼
Fast Transition	<input type="checkbox"/>

WPA2 - Personal

Shared Key

Enter a passphrase of between 8 and 63 alphanumeric characters to create a passphrase used for data encryption and authentication. Click **Hide / Show Characters** to toggle visibility.

Management Frame Protection

This feature protects stations against forged management frames spoofed from other devices. Frames that are protected include Disassociation, Deauthentication and QoS Action.

Fast Transition

Fast Transition

[802.11r] When this option is ticked, the transition process of a mobile client is improved as it moves between access points.

Security Settings	
Security Policy	WPA2 - Enterprise ▼
Encryption	AES:CCMP
802.1X Version	<input checked="" type="radio"/> v1 <input type="radio"/> v2
Management Frame Protection	Default (Disabled) ▼
Fast Transition	<input type="checkbox"/>

WPA2 - Enterprise

802.1X Version

Choose **v1** or **v2** of the 802.1x EAPOL. When **v1** is selected, both v1 and v2 clients can associate with the access point. When **v2** is selected, only v2 clients can associate with the access point. Most modern wireless clients support v2. For stations that do not support v2, select **v1**. The default is **v2**.

Management Frame Protection

This feature protects stations against forged management frames spoofed from other devices. Frames that are protected include Disassociation, Deauthentication and QoS Action.

Fast Transition

Fast Transition

[802.11r] When this option is ticked, the transition process of a mobile client is improved as it moves between access points.

Security Settings	
Security Policy	WPA/WPA2 - Personal ▼
Encryption	TKIP/AES:CCMP
Shared Key	<div><input type="text"/></div> <div><input checked="" type="checkbox"/> Hide Characters</div>
Management Frame Protection	Default (Disabled) ▼

WPA/WPA2 – Personal

Shared Key

Enter a passphrase of between 8 and 63 alphanumeric characters to create a passphrase used for data encryption and authentication. Click **Hide / Show Characters** to toggle visibility.

Management Frame Protection

This feature protects stations against forged management frames spoofed from other devices. Frames that are protected include Disassociation, Deauthentication and QoS Action.

Security Settings	
Security Policy	WPA/WPA2 - Enterprise ▼
Encryption	TKIP/AES:CCMP
802.1X Version	<input checked="" type="radio"/> v1 <input type="radio"/> v2
Management Frame Protection	Default (Disabled) ▼

WPA/WPA2 – Enterprise

802.1X Version

Choose **v1** or **v2** of the 802.1x EAPOL. When **v1** is selected, both v1 and v2 clients can associate with the access point. When **v2** is selected, only v2 clients can associate with the access point. Most modern wireless clients support v2. For stations that do not support v2, select **v1**. The default is **v2**.

Management Frame Protection

This feature protects stations against forged management frames spoofed from other devices. Frames that are protected include Disassociation, Deauthentication and QoS Action.

Access Control	
Restricted Mode	Accept all except listed ▼
MAC Address List	<div> <div></div> <div>Connected clients:</div> <div></div> </div>

Access Control

Restricted Mode The settings allow the administrator to control access using Mac address filtering. Available options are **None**, **Deny all except listed**, **Accept all except listed**, and **RADIUS MAC Authentication**.

MAC Address List Connections coming from the MAC addresses in this list will be either denied or accepted based on the option selected in the previous field.

RADIUS Settings	Primary Server	Secondary Server
	You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles	
Authentication Host	<input type="text"/>	<input type="text"/>
Authentication Port	<input type="text" value="1812"/>	<input type="text" value="1812"/>
Authentication Secret	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
	You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles	
Accounting Host	<input type="text"/>	<input type="text"/>
Accounting Port	<input type="text" value="1813"/>	<input type="text" value="1813"/>
Accounting Secret	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
NAS-Identifier	<input type="text" value="Device Name"/> ▼	

RADIUS Server Settings

Host Enter the IP address of the primary RADIUS server and, if applicable, the secondary RADIUS server.

Secret Enter the RADIUS shared secret for the primary server and, if applicable, the secondary RADIUS server.

Authentication Port Enter the UDP authentication port(s) used by your RADIUS server(s) or click the **Default** button to enter **1812**.

Accounting Port Enter the UDP accounting port(s) used by your RADIUS server(s) or click the **Default** button to enter **1813**.

NAS-Identifier

Information added to access requests to identify the NAS.

Select **Device Name**, **LAN MAC Address**, **Device Serial Number** or enter a **Custom Value**

When the NAS ID is not defined, the Device Name will be used as the NAS ID in RADIUS requests.

Guest Protect			
Block All Private IP	<input type="checkbox"/>		
Custom Subnet	Network	Subnet Mask	
	<input type="text"/>	255.255.255.0 (/24) ▼	<input data-bbox="1352 535 1385 577" type="button" value="+"/>
Block Exception	Network	Subnet Mask	
	<input type="text"/>	255.255.255.0 (/24) ▼	<input data-bbox="1352 619 1385 661" type="button" value="+"/>

Guest Protect

Block All Private IP

Check this box to block access from the Private IP.

Custom Subnet

To specify a subnet to block, enter the IP address and choose a subnet mask from the drop-down menu. To add the blocked subnet, click . To delete a blocked subnet, click .

Block Exception

To create an exception to a blocked subnet (above), enter the IP address and choose a subnet mask from the drop-down menu. To add the exception, click . To delete an exception, click .

Bandwidth Management	
Upstream Limit	<input type="text"/> kbps (0:Unlimited)
Downstream Limit	<input type="text"/> kbps (0:Unlimited)
Client Upstream Limit	<input type="text"/> kbps (0:Unlimited)
Client Downstream Limit	<input type="text"/> kbps (0:Unlimited)

Bandwidth Management

Upstream Limit

Enter a value in kbps to limit the wireless network's upstream bandwidth.

Enter **0** to allow unlimited upstream bandwidth.

Downstream Limit Enter a value in kbps to limit the wireless network's downstream bandwidth.

Enter **0** to allow unlimited downstream bandwidth.

Client Upstream Limit Enter a value in kbps to limit connected clients' upstream bandwidth.


Enter **0** to allow unlimited upstream bandwidth.


Client Downstream Limit Enter a value in kbps to limit connected clients' downstream bandwidth. Enter **0** to allow unlimited downstream bandwidth.



Firewall Settings			
Firewall Mode	Lockdown - Block all except... ▼		
Firewall Exceptions	Name	Type	Item
	No Active Exceptions		
	New Rule		

Firewall Settings

Firewall Mode Choose **Flexible - Allow all except...** or **Lockdown - Block all except...** to turn on the firewall, then create rules for the firewall exceptions by clicking **New Rule**. See the discussion below for details on creating a firewall rule. To delete a rule, click the associated  button. To turn off the firewall, select **Disable**.

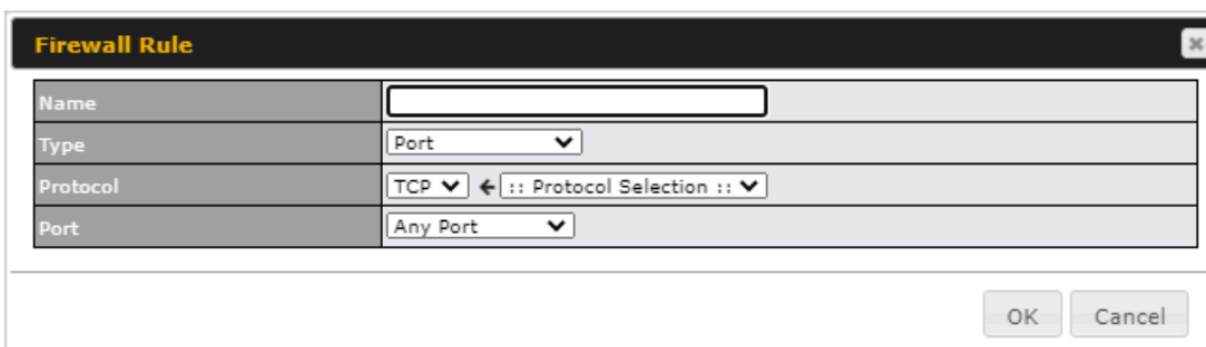

Firewall Rule	
Name	
Type	Port ▼
Protocol	TCP ▼ ← :: Protocol Selection :: ▼
Port	Any Port ▼

OK Cancel

Firewall Rule

Name Enter a descriptive name for the firewall rule in this field.


Type Choose **Port**, **IP Network**, **MAC Address** or **Domain Name** to allow or deny traffic from any of those identifiers. Depending on the option chosen, the following fields will vary.

Port	Choose TCP or UDP from the Protocol drop-down menu to allow or deny traffic using either of those protocols. From the Port drop-down menu, choose Any Port to allow or deny TCP or UDP traffic on any port. Choose Single Port and then enter a port number in the provided field to allow or block TCP or UDP traffic from that port only. You can also choose Port Range and enter a range of ports in the provided fields to allow or deny TCP or UDP traffic from the specified port range.
IP Network	If you have chosen IP Network as your firewall rule type, enter the IP address and subnet mask identifying the subnet to allow or deny.
MAC Address	If you have chosen MAC Address as your firewall rule type, enter the MAC address identifying the machine to allow or deny.
Domain Name	If you have chosen Domain Name as your firewall rule type, enter the Domain Name identifying the machine to allow or deny.

Wireless Mesh

Mesh support enables an access point (AP) to connect wirelessly to other wired mesh APs, providing redundancy in the event of AP failure. Mesh support is available for Wi-Fi networks 802.11ac (Wi-Fi 5) and above.

Please note that the AP's Mesh settings need to match the Mesh ID and Shared Key of the selected frequency band in order for the AP to join the network.

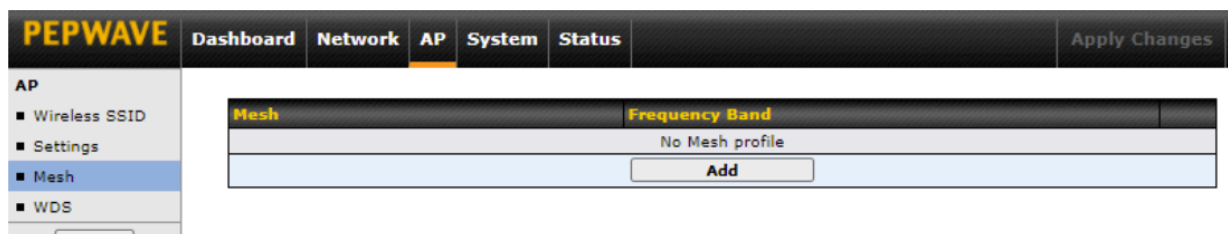

To create a new Wireless Mesh profile, go to **AP > Mesh**, and click **Add**.

Mesh Settings

Mesh ID

Enable

☐

Frequency

☒ 2.4GHz
 ☐ 5GHz

Shared Key

Hide / Show Passphrase

Save

Cancel

Mesh Settings

Mesh ID Enter a name to represent the Mesh profile.

Enable Check the box to enable the Mesh Profile.

Frequency Select the 2.4GHz or 5GHz frequency to be used.

Shared Key Enter the shared key in the text field. Please note that it needs to match the shared keys of the other APs in the Mesh.

Click **Hide / Show Passphrase** to toggle visibility.

WDS

A wireless distribution system (WDS) provides a way to link access points together when wired or cabled connections are not feasible or desirable. A WDS can also extend wireless network coverage for wireless clients. Please note that your access point's channel setting should not be set to **Auto** when using WDS.

PEPWAVE

Dashboard

Network

AP

System

Status

Apply Changes

AP

Wireless SSID

Wireless Mesh

WDS

Settings

Status

Access Point

Wireless SSID

	2.4 GHz	5 GHz
Local MAC Address	00:1A:DD:7B:58:E4	00:1A:DD:7B:58:E8

Note: Require firmware 3.6.2 or above for AP ONE WDS support

WDS	Frequency Band
No WDS Defined	
Add	

To create a new WDS, go to **AP > WDS**, and click **Add**.

WDS Settings

MAC Address	<input type="text" value="00:00:00:00:00:00"/>
Enable	<input checked="" type="checkbox"/>
Frequency	<input checked="" type="radio"/> 2.4 GHz <input type="radio"/> 5 GHz
Encryption Key	<div><input type="text"/> <input checked="" type="checkbox"/> Hide Characters</div>

Save

Cancel

WDS

MAC Address	Enter the MAC address of the access point with which to form a WDS link.
Enable	Check this box to enable WDS.
Frequency	Select the frequency (2.4GHz or 5GHz) for WDS peer connection.
Encryption	Select AES to enable encryption for WDS peer connections. Selecting None disables encryption.

Settings

Basic access point operation settings, such as the protocol and channels used, as well as scanning intervals and other advanced settings can be defined and managed in this section.

AP Settings	
SSID	<div>2.4 GHz 5 GHz</div> <div><input checked="" type="checkbox"/> <input checked="" type="checkbox"/> PEPLINK</div>
Operating Country	United States
	2.4 GHz 5 GHz
Protocol	802.11ng 802.11n/ac
Channel Width	Auto Auto
Channel	<div>Auto Edit</div> <div>Channels: 1 2 3 4 5 6 7 8 9 10 11</div> <div>Auto Edit</div> <div>Channels: 36 40 44 48 149 153 157 161 165</div>
Auto Channel Update	<div>Daily at Clear All</div> <div> <input type="checkbox"/> 00:00 <input type="checkbox"/> 01:00 <input type="checkbox"/> 02:00 <input checked="" type="checkbox"/> 03:00 <input type="checkbox"/> 04:00 <input type="checkbox"/> 05:00 <input type="checkbox"/> 06:00 <input type="checkbox"/> 07:00 <input type="checkbox"/> 08:00 <input type="checkbox"/> 09:00 <input type="checkbox"/> 10:00 <input type="checkbox"/> 11:00 <input type="checkbox"/> 12:00 <input type="checkbox"/> 13:00 <input type="checkbox"/> 14:00 <input type="checkbox"/> 15:00 <input type="checkbox"/> 16:00 <input type="checkbox"/> 17:00 <input type="checkbox"/> 18:00 <input type="checkbox"/> 19:00 <input type="checkbox"/> 20:00 <input type="checkbox"/> 21:00 <input type="checkbox"/> 22:00 <input type="checkbox"/> 23:00 <input checked="" type="checkbox"/> Wait until no active client associated </div> <div>Daily at Clear All</div> <div> <input type="checkbox"/> 00:00 <input type="checkbox"/> 01:00 <input type="checkbox"/> 02:00 <input checked="" type="checkbox"/> 03:00 <input type="checkbox"/> 04:00 <input type="checkbox"/> 05:00 <input type="checkbox"/> 06:00 <input type="checkbox"/> 07:00 <input type="checkbox"/> 08:00 <input type="checkbox"/> 09:00 <input type="checkbox"/> 10:00 <input type="checkbox"/> 11:00 <input type="checkbox"/> 12:00 <input type="checkbox"/> 13:00 <input type="checkbox"/> 14:00 <input type="checkbox"/> 15:00 <input type="checkbox"/> 16:00 <input type="checkbox"/> 17:00 <input type="checkbox"/> 18:00 <input type="checkbox"/> 19:00 <input type="checkbox"/> 20:00 <input type="checkbox"/> 21:00 <input type="checkbox"/> 22:00 <input type="checkbox"/> 23:00 <input checked="" type="checkbox"/> Wait until no active client associated </div>
Output Power	Custom 20 dBm Custom 20 dBm
Client Signal Strength Threshold	0 -95 dBm (0: Unlimited) 0 -95 dBm (0: Unlimited)
Maximum number of clients	0 (0: Unlimited) 0 (0: Unlimited)
Discover Nearby Networks	<input checked="" type="checkbox"/> Note: Feature will be automatically turned on with Auto Channel / Dynamic Output Power
Beacon Rate	1 Mbps
Beacon Interval	100 ms
DTIM	1
RTS Threshold	0
Fragmentation Threshold	0 (0: Disable)
Distance / Time Converter	<div>4050 m</div> <div>Note: Input distance for recommended values</div>
Slot Time	Auto Custom 9 μs
ACK Timeout	48 μs

AP Settings

SSID Select if an SSID is broadcasting on 2.4 GHz, 5 GHz or both bands.

Operating Country This drop-down menu specifies the national / regional regulations the AP should follow.

If a North American region is selected, RF channels 1 to 11 will be available and the maximum transmission power will be 26 dBm (400 mW).

If a European region is selected, RF channels 1 to 13 will be available. The maximum transmission power will be 20 dBm (100 mW).

NOTE: Users are required to choose an option suitable to local laws and regulations.

Per FCC regulation, the country selection is not available on all models marketed in the US. All US models are fixed to US channels only.

Protocol	<p>Choose 802.11ng or 802.11n/ac as your access point's Wi-Fi protocol.</p> <p>The AP One AC mini provides the 802.11ng protocol for the 2.4 GHz band and the 802.11n/ac protocol for the 5GHz band, as shown below.</p>
Channel Width	<p>This option defines which channel width the radio will use:</p> <p>20MHz – Supports clients with 20MHz capability. This is the default value for 802.11ng.</p> <p>40MHz – Supports clients with 20/40MHz capability. 20/40MHz – Supports clients with 20/40 MHz capability. The radio will fall back to 20MHz if it detects APs that only support 20MHz. This is the default value for 802.11na.</p> <p>80MHz – Supports clients with 20/40/80MHz capability. This is the default value for 802.11n/ac.</p>
Channel	<p>This drop-down menu selects the 2.4 GHz and 5GHz 802.11 channels to be used.</p> <p>When Auto is selected, the system will perform channel scanning based on the scheduled time set and choose the most suitable channel automatically.</p>
Output Power	<p>This option enables the configuration of transmission power. Choose between: Max / High / Medium / Low / Custom.</p> <p>Max is the Maximum power supported for that country or Maximum power supported for the device (whichever is the smaller value).</p> <p>High is 3dBm below the max value. Medium is 3dBm below high value. Low is 3 dBm below Medium value.</p>
Client Signal Strength Threshold	<p>This field determines the minimum acceptable client signal strength, specified in decibel-milliwatts (dBm). If client signal strength does not meet this minimum, the client will not be allowed to connect.</p>
Maximum number of Clients	<p>Enter the maximum clients that can simultaneously connect to your access point or set the value to 0 to allow unlimited clients.</p>
Discover Nearby Networks	<p>Check this box to enable network discovery. Note that setting Channel to Auto will activate this feature automatically.</p>
Beacon Rate	<p>This drop-down menu provides the option to send beacons in different transmit bit rates. The bit rates are 1 Mbps, 2 Mbps, 5.5 Mbps, 6 Mbps, and 11 Mbps.</p>
Beacon Interval	<p>Set the time between each beacon send. Available options are 100 ms, 250 ms, and 500 ms.</p>

DTIM	Set the frequency for the beacon to include delivery traffic indication messages (DTIM). The interval unit is measured in milliseconds.
RTS Threshold	Set the minimum packet size for your access point to send an RTS using the RTS/CTS handshake. Setting 0 disables this feature.
Fragmentation Threshold	Enter a value to limit the maximum frame size, which can improve performance.
Distance / Time Convertor	This slider and text entry field can be used to interactively set slot time.
Slot Time	This field provides the option to modify the unit wait time before your access point transmits. The default value is 9μs .
ACK Timeout	Set the wait time to receive an acknowledgement packet before retransmitting. The default value is 48μs .

Status

Access Point (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/access-point/>)

Wireless SSID (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/wireless-ssid/>)

Wireless Client (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/wireless-client/>)

Mesh / WDS (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/mesh-wds/>)




Nearby Device (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/nearby-device/>)

Event Log (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch7-ap-tab/status/event-log/>)

Access Point


A detailed breakdown of data usage and number of clients for each AP is available at **AP > Status** > **Access Point**.




AP Status					
Name	IP Address	Clients	Sent (Retry) kbps (%)	Received (Retry) kbps (%)	
AP-One-AC-Mini-E	(Local)	1 / 0	5.54 (0%) / 0.00 (0%)	4.81 (0%) / 0.00 (0%)	  

This table shows the detailed information on each AP, including channel, number of clients, power, upload traffic, and download traffic. On the right of the table, you will see the following icons:



Click the  icon to see a usage table for each client:


Client List (2)							
MAC Address	IP Address	Type	RSSI	SSID		Download	Upload
00:1A:DD:D9:4D:84	192.168.1.102	802.11ng	-65	PEPWAVE		153834701	29402606
<div>Close</div>							


Click the  icon to configure AP details.

AP Details

Serial Number	
MAC Address	00:1A:DD:7B:67:F0
Product Name	Pepwave AP One AC Mini
Firmware Version	3.7.3
SSID List	2.4 GHz: PEPLINK_072C (00:1A:DD:7B:67:E4) 5 GHz: PEPLINK_072C (00:1A:DD:7B:67:E8)
Current Channel	2.4 GHz: 2 5 GHz: 36
Current Output Power	2.4 GHz: 20 dBm 5 GHz: 20 dBm

Close

Click the  icon to see a graph displaying usage.

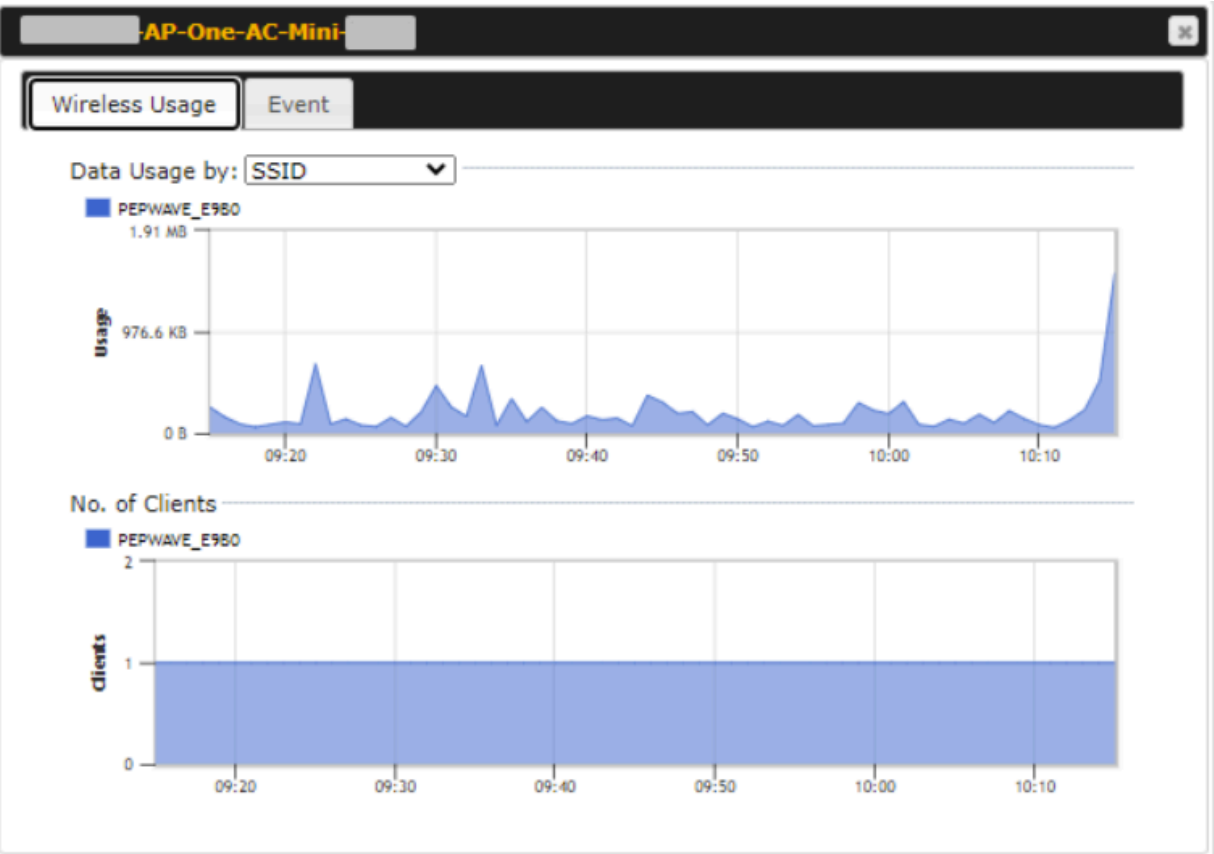

Click any point on the graphs to display detailed usage and client information for that device, using that SSID, at that point in time. On the **Data Usage by** drop-down menu, you can display the information by SSID or by AP send/receive rate.

AP-One-AC-Mini-

Wireless Usage

Event

Event Log

Auto refresh


Dec 28 10:42:58	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 28 10:42:36	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 28 10:00:49	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 28 10:00:47	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 28 10:00:28	[Radio 2] Channel changed from 149 to 153	
Dec 28 10:00:28	Channel changed from 1 to 8	
Dec 28 08:45:38	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 28 08:45:28	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 28 08:45:04	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 27 22:21:52	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 27 10:43:28	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 27 10:43:00	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 27 10:42:42	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 26 16:21:51	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 26 11:18:48	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 26 11:18:39	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 26 11:18:20	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 25 21:27:04	Client	associated with PEPWAVE_E9B0 (2.4 GHz)
Dec 25 21:26:40	Client	disassociated from PEPWAVE_E9B0 (2.4 GHz)
Dec 25 10:23:26	Client	associated with PEPWAVE_E9B0 (2.4 GHz)

More...

You may click the **Event** tab which is next to **Wireless Usage** to view a detailed event log for that particular device.

Wireless SSID

In-depth SSID reports are available under **AP > Status > Wireless SSID**.

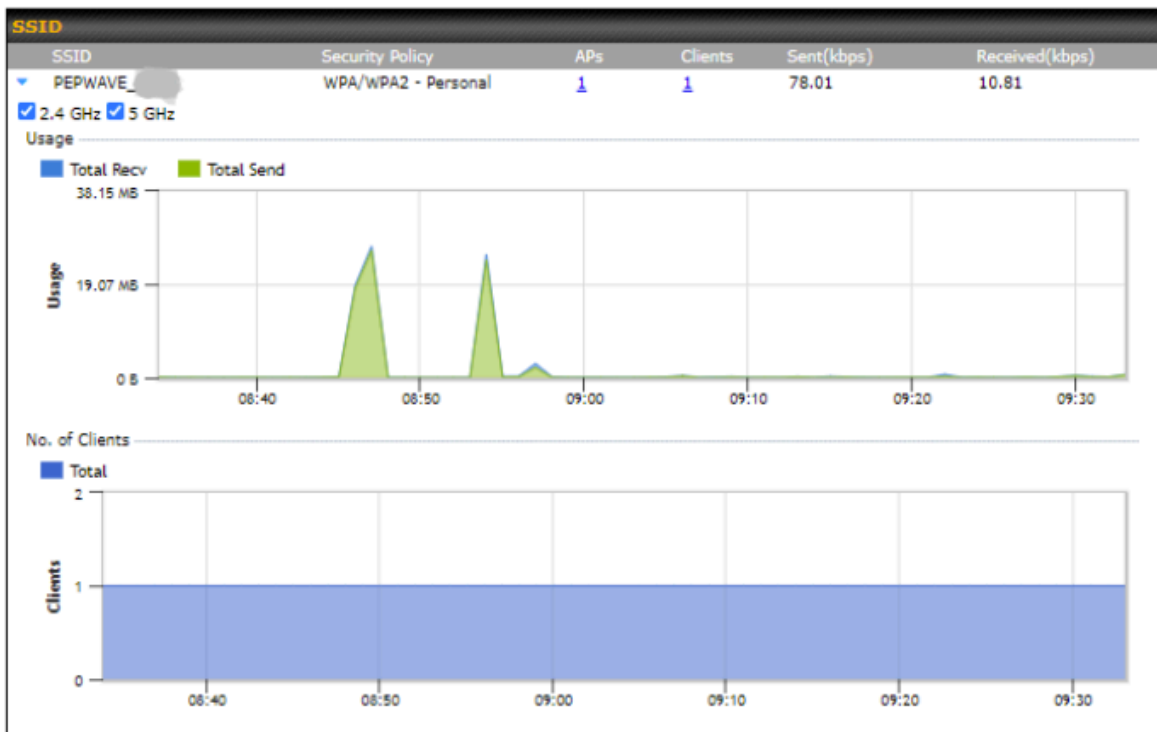

Click the blue arrow on any SSID to obtain more detailed usage information on each SSID.

Wireless Client

You can search for specific Wi-Fi users by navigating to **AP > Status > Wireless Client**.

Search Filter	
Search Key	<input type="text" value="Client MAC Address / SSID"/>
Maximum Result (1-256)	<input type="text" value="50"/>
Show Associated Clients Only	<input type="checkbox"/>
Search Result	
<input type="button" value="Search"/>	

Wireless Clients						
Name / MAC Address ▲	IP Address	Type	RSSI (dBm)	SSID	AP	Duration
Surf / [redacted]...	192.168.0.1	802.11ng	-63	PEPWAVE	[redacted] -AP-One-AC...	06:00:09 ☆ [icon]

Top 10 Clients of last hour (Updated at 09:00)		
Client	Upload	Download
Surf / [redacted]	5.30 MB	73.97 MB ☆ [icon]

Wireless Client allows you to be able to see your network's heaviest users as well as search for specific users. Click the ☆ icon to bookmark specific users, and click the [icon] icon for additional details about each user.

Information	
Status	Associated
Client	Surf / C
Access Point	TK-Cyber-AP-One-AC-Mini- /
SSID	PEPWAVE_E9B0
IP Address	
Duration	06:08:21
Usage (Download / Upload)	145.02 MB / 27.00 MB
RSSI	-65 dBm
Rate (Download / Upload)	72M / 72.2M
Type	802.11ng



SSID	AP	From	To	Download	Upload
PEPWAVE_E9B0 (2.4 GHz)	TK-Cyber-AP-One-AC-...	Dec 28 03:42:58	-	145.01 MB	26.99 MB
PEPWAVE_E9B0 (2.4 GHz)	TK-Cyber-AP-One-AC-...	Dec 28 03:00:49	Dec 28 03:42:36	1.82 MB	702.7 KB
PEPWAVE_E9B0 (2.4 GHz)	TK-Cyber-AP-One-AC-...	Dec 28 01:45:38	Dec 28 03:00:47	20.90 MB	7.37 MB

Mesh / WDS

Mesh / WDS						
Type	MAC	Protocol	Rate (Send)	Rate (Receive)	Signal (dBm)	Duration
AP_One_AC_Mini_5332/						
Mesh (test)	00:1A:DD:DA:EB:F0	802.11ac	520M	866.7M	-32	00:01:19

Mesh/WDS allows you to monitor the status of your wireless distribution system (WDS) or Mesh, and track activity by MAC address. This table shows the detailed information of each AP, including protocol, transmit rate (sent / received), signal strength, and duration.

Nearby Device

A listing of near devices can be accessed by navigating to **AP > Status > Nearby Device**.

Search Filter	
Search Key	MAC Address / SSID
Type	All
Maximum Result (1-999)	200
Time	From <input type="text"/> hh:mm to <input type="text"/> hh:mm
Search	

Nearby Devices							
Mark	Type	MAC Address	SSID	Channel	Encryption	Last Seen	Mark as
	AP			36	WPA2	2 minutes ago	
	AP			36	WPA2	2 minutes ago	
	AP			36	WPA2	2 minutes ago	
	AP			36	WPA2	2 minutes ago	
	Station Probe		-	5		1 minute ago	
	Station Probe		-	5		11 minutes ago	
	Station Probe	00:0C:E7:06:B6:C9	-	5		2 hours ago	
	Station Probe	00:0C:E7:07:42:C3	-	5		1 hour ago	
	Station Probe	00:0C:E7:0B:15:1F	-	5		39 minutes ago	
	Station Probe	00:0C:E7:12:7A:D2	-	5		1 hour ago	
	Station Probe	00:0C:E7:18:9B:DB	-	5		37 minutes ago	
	Station Probe	00:0C:E7:46:28:77	-	5		39 minutes ago	
	Station Probe	00:0C:E7:47:74:AF	-	5		1 hour ago	
	Station Probe	00:0C:E7:58:59:8B	-	5		40 minutes ago	
	Station Probe	00:0C:E7:5A:5C:BA	-	5		40 minutes ago	
	Station Probe	00:0C:E7:79:F7:92	-	5		2 hours ago	
	Station Probe	00:0C:E7:AB:70:EE	-	5		1 hour ago	
	Station Probe	00:0C:E7:C4:8A:55	-	5		39 minutes ago	
	Station Probe	00:0C:E7:C8:90:9C	-	5		23 minutes ago	
	Station Probe	00:0C:E7:CF:0A:54	-	5		59 minutes ago	

Nearby Devices

Hovering over the device MAC address will result in a popup with information on how this device was detected. You may click the icon to mark the device as a known device or click the icon to mark the device as a rogue device. Marking a device with either icon will move the device to the bottom of the table of identified devices. You can sort devices by their assigned mark by clicking the **Mark** column. You may unmark a device by clicking on the icon.

Event Log

You can access the AP Controller Event log by navigating to **AP > Status > Event Log**.

Filter	
Search key	Client MAC Address / Wireless SSID
Time	From <input type="text"/> hh:mm to <input type="text"/> hh:mm
Alerts only	<input type="checkbox"/>
Search	

Event Log		<input checked="" type="checkbox"/> Auto refresh
Dec 28 08:58:15	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 28 08:57:38	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 28 08:56:50	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 16:37:48	Channel changed from 11 to 9	
Dec 24 16:37:28	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 16:35:53	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 16:35:46	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 16:17:15	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 16:17:07	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 15:16:43	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 15:16:39	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 15:08:27	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 15:08:23	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 14:36:38	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 14:36:21	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 14:35:17	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 14:35:12	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 11:38:46	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
Dec 24 11:38:42	Client 68:5D:43:FC:9B:71 disassociated from PEPWAVE_29DD	
Dec 24 10:36:15	Client 68:5D:43:FC:9B:71 associated with PEPWAVE_29DD	
		More...

Event Log

This event log displays all activity on your AP network, down to the client level. You can use the filter box to search by MAC address, SSID, AP Serial Number, or AP Profile name. Click **View Alerts** to see only alerts, and click the **More...** link for additional records.

Ch8. System Tab

Admin Security (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/admin-security/>)

Operating Mode (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/operating-mode/>)

Firmware (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/firmware/>)

Time (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/time/>)

Schedule (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/schedule/>)

Email Notification (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/email-notification/>)

[user-manual/system-tab/email-notification/](#))

Event Log (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/event-log/>)

SNMP (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/snmp/>)

Controller Management (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/controller-management/>)

Configuration (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/configuration/>)

LED (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/led/>)

Feature Add-Ons (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/feature-add-ons/>)

Reboot (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/reboot/>)

Admin Security

Admin Settings	
Device Name	AP-One-AC-Mini-E9B0 hostname: ap-one-ac-mini-e9b0 This configuration is being managed by InControl.
Admin User Name	admin
Admin Password	*****
Confirm Admin Password	*****
Read-only User Name	user
User Password	
Confirm User Password	
Web Session Timeout	4 Hours 0 Minutes
Authentication Method	<input checked="" type="radio"/> Local Account <input type="radio"/> RADIUS <input type="radio"/> TACACS+
Security	HTTP / HTTPS <input checked="" type="checkbox"/> Redirect HTTP to HTTPS
Web Admin Access	HTTP: LAN / WAN HTTPS: LAN / WAN
Web Admin Port	HTTP: 80 HTTPS: 443

WAN Connection Access Settings									
Allowed Source IP Subnets	<input checked="" type="radio"/> Any <input type="radio"/> Allow access from the following IP subnets only								
Allowed WAN IP Address(es)	<table border="1"> <thead> <tr> <th colspan="2">Connection / IP Address(es)</th> <th>All</th> <th>Clear</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="checkbox"/> WAN 1</td> <td><input checked="" type="checkbox"/> Interface IP</td> <td></td> <td></td> </tr> </tbody> </table>	Connection / IP Address(es)		All	Clear	<input checked="" type="checkbox"/> WAN 1	<input checked="" type="checkbox"/> Interface IP		
Connection / IP Address(es)		All	Clear						
<input checked="" type="checkbox"/> WAN 1	<input checked="" type="checkbox"/> Interface IP								

Admin Settings

Devicer Name This field allows you to define a name for this Peplink Balance unit. By default, **Device Name** is set as **Model_XXXX**, where XXXX refers to the last 4 digits of the serial number of that unit.

Admin User Name **Admin User Name** is set as **admin** by default, but can be changed.

Admin Password This field allows you to specify a new administrator password.

Confirm Admin Password This field allows you to confirm the new administrator password.

Read-only User Name **Read-only User Name** is set as **user** by default, but can be changed, if desired.

User Password This field allows you to specify a new user password. Once the user password is set, the read-only user feature will be enabled.

Confirm User Password This field allows you to confirm the new user password.

**Web Session
Timeout**

A web login session will be logged out automatically when it has been idle longer than the Web Session Timeout.

Unlimited session timeout: 0 hours 0 minutes.
Default: 4 hours 0 minutes.

Authentication Method

When **External Authentication** is selected, the web admin will authenticate using the corresponding external server. Authenticated users are treated as either “admin” with full read-write permission or “user” with read-only access. Local admin and user accounts will be disabled. However, when the device is not able to communicate with the external server, local accounts are enabled to allow emergency access. By default, it is set to Local Account. Available options:

- Local Account
- RADIUS

Authentication Method	<input type="radio"/> Local Account <input checked="" type="radio"/> RADIUS <input type="radio"/> TACACS+
Authentication Protocol	MS-CHAP v2
	You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles
Authentication Host	
Authentication Port	1812
Authentication Secret	<div></div> <div><input checked="" type="checkbox"/> Hide Characters</div>
	You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles
Accounting Host	
Accounting Port	1813
Accounting Secret	<div></div> <div><input checked="" type="checkbox"/> Hide Characters</div>
Authentication Timeout	3 seconds

Authentication Protocol	This specifies the authentication protocol used. Available options are MSCHAP v2 and PAP .
Authentication Host	This specifies the IP address or hostname of the RADIUS server host.
Authentication Port	This setting specifies the UDP destination port for authentication requests.
Authentication Secret	This field is for entering the secret key for accessing the RADIUS server.
Accounting Host	This specifies the IP address or hostname of the RADIUS server host.
Accounting Port	This setting specifies the UDP destination port for accounting requests.
Accounting Secret	This field is for entering the secret key for accessing the accounting server.

Authentication Timeout	This option specifies the time value for authentication timeout.
------------------------	--

- TACACS+

Authentication Method	<input type="radio"/> Local Account <input type="radio"/> RADIUS <input checked="" type="radio"/> TACACS+
TACACS+ Server	<input type="text"/>
TACACS+ Server Secret	<input type="text"/> <input checked="" type="checkbox"/> Hide Characters
TACACS+ Server Timeout	<input type="text" value="3"/> seconds

TACACS+ Server	This specifies the access address of the external TACACS+ server.
-----------------------	---

TACACS+ Server Secret	This field is for entering the secret key for accessing the RADIUS server.
------------------------------	--

TACACS+ Server Timeout	This option specifies the time value for TACACS+ timeout.
-------------------------------	---

Security

This option is for specifying the protocol(s) through which the web admin interface can be accessed:

- HTTP
- HTTPS
- HTTP/HTTPS

Web Admin Access

This option is for specifying the network interfaces through which the web admin interface can be accessed:

- LAN only
- LAN/WAN

If **LAN/WAN** is chosen, the WAN Connection Access Settings form will be displayed.

Web Admin Port

This field is for specifying the port number on which the web admin interface can be accessed.

Allowed Source IP Subnets

This option is for specifying the IP subnets through which the web admin interface can be accessed.

- Any – Allow web admin access to be from anywhere, and without an IP address.
- Allow access from the following IP subnets only – Restrict web admin access to only the defined IP subnets. When this is chosen, a text input area will be displayed beneath:

The allowed IP subnet addresses should be entered into this text area. Each IP subnet must be in form of w.x.y.z/m, where w.x.y.z is an IP address (e.g. 192.168.0.0), and m is the subnet mask in CIDR format, which is between 0 and 32 inclusively (e.g. 192.168.0.0/24).


To define multiple subnets, separate each IP subnet one in a line. For example:

- 192.168.0.0/24
- 10.8.0.0/16

Allowed WAN IP Address(es)

This field allows you to select the WAN IP address(es) the web server should connect to.


Operating Mode

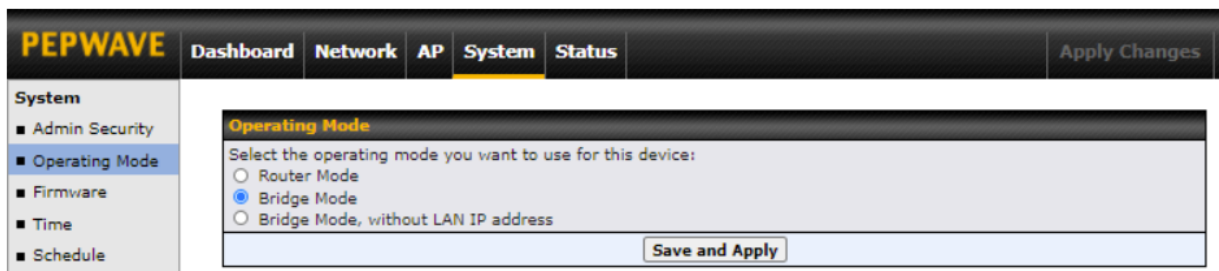

You can select the operating mode you want to use for the access point device. The available options are:

- Router Mode
- Bridge Mode
- Bridge Mode, without LAN IP address

Firmware

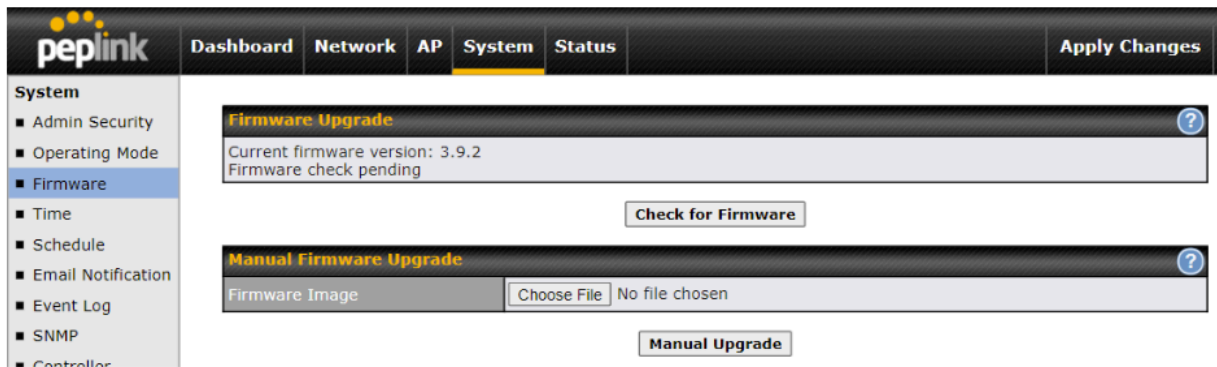

There are two ways to upgrade the unit. The first method is through an online download. The second method is to upload a firmware file manually.

To perform an online download, click on the **Check for Firmware** button. The access point will check online for new firmware. If new firmware is available, the access point automatically downloads the firmware. The rest of the upgrade process will be automatically initiated.

You may also download a firmware image from the Peplink website (<http://www.peplink.com>) and update the unit manually. To update using a firmware image, click **Choose File** to select the firmware file from the local computer, and then click **Manual Upgrade** to send the firmware to the access point. It will then automatically initiate the firmware upgrade process.

Please note that all devices can store two different firmware versions in two different partitions. A firmware upgrade will always replace the inactive partition. If you want to keep the inactive firmware, you can simply reboot your device with the inactive firmware and then perform the firmware upgrade.

Firmware Upgrade Status


Status LED information during firmware upgrade:

- OFF – Firmware upgrade in progress (DO NOT disconnect power.)
- Red – Unit is rebooting
- Green – Firmware upgrade successfully completed

Important Note

The firmware upgrade process may not necessarily preserve the previous configuration, and the behavior varies on a case-by-case basis. Consult the release notes for the particular firmware version before installing. Do not disconnect the power during the firmware upgrade process. Do not attempt to upload a non-firmware file or a firmware file that is not supported by Peplink. Upgrading the Peplink Balance with an invalid firmware file will damage the unit and may void the warranty.

Time

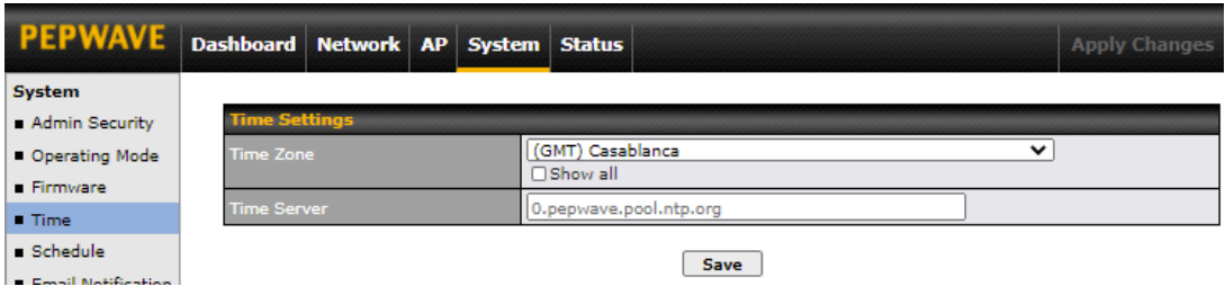

The time server functionality enables the system clock of the access point to be synchronized with a specified time server. The settings for time server configuration are located at **System > Time**.

Time Settings

Time Zone This specifies the time zone (along with the corresponding Daylight Savings Time scheme) in which Pepwave AP operates. The **Time Zone** value affects the time stamps in the event log of the Pepwave AP and e-mail notifications. Check **Show all** to show all time zone options.

Time Server This setting specifies the NTP network time server to be utilized by the Pepwave AP.

Schedule

PEP WAVE

Dashboard

Network

AP

System

Status

Apply Changes

System

Admin Security

Operating Mode

Firmware

Time

Schedule

Email Notification

Name

Time

Used by

No schedule profile defined

New Schedule

Enable and disable different functions such as WAN connections and SSID at different times, based on a user-scheduled configuration profile. The settings for this are located at **System > Schedule**.

Click on **New Schedule** to begin the schedule profile.

Edit schedule profile

Schedule Settings

Enable

☒

The schedule function of those associated features will be lost if profile is disabled.

Name

Schedule

Always on

Used by

Schedule Map

	Midnight	4am	8am	Noon	4pm	8pm
Sunday						
Monday						
Tuesday						
Wednesday						
Thursday						
Friday						
Saturday						

Save

Cancel

Edit Schedule Profile	
Enable	Click this checkbox to enable this schedule profile. Note that if this is disabled, then any associated features will also have their scheduling disabled.
Name	Enter your desired name for this particular schedule profile.
Schedule	Click the drop-down menu to choose from predefined schedules as your starting point. Please note that upon selecting a predefined schedule, previous changes on the schedule map will be deleted.
Schedule Map	Click on the desired times to enable features for that time period. You can hold down your mouse button for faster entry.

Email Notification

PEPWAVE

DashboardNetworkAPSystemStatus

Apply Changes

System

- Admin Security
- Operating Mode
- Firmware
- Time
- Schedule
- Email Notification
- Event Log
- SNMP
- Controller Management
- Configuration
- Feature Add-ons
- Reboot

Tools

- Ping
- Traceroute
- Webcam

Email Notification Setup

Email Notification

☒ Enable

SMTP Server

☒ Require authentication

Connection Security

None

SMTP Port

25

SMTP User Name

SMTP Password

Confirm SMTP Password

Sender's Email Address

Recipient's Email Address

Test Email Notification

Save

Email notification functionality provides a system administrator with up-to-date information on network status. The settings for configuring email notifications are found at **System > Email Notification**.

Email Notification Settings	
Email Notification	<p>This setting specifies whether or not to enable email notification.</p> <p>If Enable is checked, the Pepwave AP will send email messages to system administrators when the WAN status changes or when new firmware is available.</p> <p>If Enable is unchecked, email notification is disabled and the Pepwave AP will not send email messages.</p>
SMTP Server	<p>This setting specifies the SMTP server to be used for sending the email notifications. If the server requires authentication, check Require authentication.</p>

Connection Security	<p>This setting specifies via a drop-down menu one of the following valid connection security options:</p> <ul style="list-style-type: none"> ◦ None ◦ STARTTLS ◦ SSL/TTS <p>When a connection security option is selected, the SMTP Port will automatically set a default port number.</p>
SMTP Port	<p>This field is for specifying the SMTP port number. By default, this is set to 25.</p> <p>When STARTTLS is selected, the default port number will be set to 587.</p> <p>When SSL/TTS is selected, the default port number will be set to 465.</p> <p>You may customize the port number by editing this field.</p>
SMTP User Name / Password	<p>This setting specifies the SMTP username and password for accessing the SMTP Server to send the email notifications. These fields are only visible when the Require authentication box is checked in the SMTP Server setting.</p>
Confirm SMTP Password	<p>This field allows you to verify that the SMTP password matches (if a password is provided in the SMTP Password field).</p>
Sender's Email Address	<p>This setting specifies the email address that the Pepwave AP will send reports from.</p>
Recipient's Email Address	<p>This setting specifies the email address(es) to which the Pepwave AP will send email notifications. For multiple recipients, separate each email address using the Enter key.</p>

After you have finished setting up email notifications, you may click the **Test Email Notification** button to test the settings before saving them. After **Test Email Notification** is clicked, you will see this screen to confirm the settings:

Test Email Notification	
SMTP Server	smtp.mycompany.com
SMTP Port	465
SMTP UserName	smtpuser
Sender's Email Address	admin@mycompany.com
Recipient's Email Address	system@mycompany.com staff@mycompany.com

Click **Send Test Notification** to send the test email with the current settings. In a few seconds, you will see a message with detailed test results.

Test email sent.
 (NOTE: Settings are not saved. To confirm the update, click 'Save' button.)

Email Notification Setup ?	
Email Notification	<input checked="" type="checkbox"/> Enable
SMTP Server	<input type="text"/> <input checked="" type="checkbox"/> Require authentication
Connection Security	SSL/TLS (Note: any server certificate will be accepted)
SMTP Port	<input type="text" value="465"/>
SMTP User Name	<input type="text"/>
SMTP Password	<input type="password"/>
Confirm SMTP Password	<input type="password"/>
Sender's Email Address	<input type="text"/>
Recipient's Email Address	<div style="border: 1px solid #ccc; height: 40px; width: 100%; position: relative;"> <div style="position: absolute; bottom: 5px; right: 5px; background-color: #27ae60; color: white; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">G</div> </div>

Test Result

```

[INFO] Try email through auto detected connection
[INFO] SMTP through SSL connected
[<-] 220 smtp.gmail.com ESMTP h11sm3907691pjj.46 - gsmt
[>-] EHLO balance.peplink.com
[<-] 250-smtp.gmail.com at your service, [14.192.209.255]
[<-] 250-SIZE 35882577
[<-] 250-8BITMIME
[<-] 250-AUTH LOGIN PLAIN XOAUTH2 PLAIN-CLIENTTOKEN OAUTHBEARER XOAUTH
[<-] 250-ENHANCEDSTATUSCODES
[<-] 250-PIPELINING
[<-] 250-CHUNKING
[<-] 250 SMTPUTF8
[>-] AUTH PLAIN AGdwc2djbjk0QGdtVWlsLmNvbQBwdnJ6bWF6cGhtYXJpanpp
  
```

Event Log

The screenshot shows the PEPWAVE web interface. The top navigation bar includes 'Dashboard', 'Network', 'AP', 'System' (highlighted), and 'Status'. On the right of the bar is an 'Apply Changes' button. A left sidebar lists system settings: 'System' (parent), 'Admin Security', 'Operating Mode', 'Firmware', 'Time', 'Schedule', 'Email Notification', 'Event Log' (highlighted), 'SNMP', and 'Controller'. The main content area has two sections: 'Send Events to Remote Syslog Server' and 'Push Events to Mobile Devices'. The first section contains a checkbox for 'Remote Syslog', a text field for 'Remote Syslog Host', and a 'Port' field set to '514'. The second section contains a checkbox for 'Push Events'. A 'Save' button is located at the bottom center of the configuration area.

Event log functionality enables event logging at a specified remote syslog server. The settings for configuring the remote system log can be found at **System > Event Log**.

Remote Syslog Settings

Remote Syslog	This setting specifies whether or not to log events at the specified remote syslog server.
Remote Syslog Host	This setting specifies the IP address or hostname of the remote syslog server. Default Port is: 514
Push Event	<p>The Pepwave AP can also send push notifications to mobile devices that have our Mobile Router Utility installed. Check the box to activate this feature.</p> <p>For more information on the Router Utility, go to: www.peplink.com/products/router-utility (http://www.peplink.com/products/router-utility)</p>

SNMP

SNMP or simple network management protocol is an open standard that can be used to collect information about the Pepwave AP unit. SNMP configuration is located at **System > SNMP**.

SNMP Settings	
SNMP Device Name	<input type="text"/>
Location	<input type="text"/>
SNMP Port	<input type="text" value="161"/> <input type="button" value="Default"/>
SNMPv1	<input checked="" type="checkbox"/> Enable
SNMPv2c	<input checked="" type="checkbox"/> Enable
SNMPv3	<input checked="" type="checkbox"/> Enable
SNMP Trap	<input checked="" type="checkbox"/> Enable
SNMP Trap Community	<input type="text"/>
SNMP Trap Server	<input type="text"/>
<input type="button" value="Save"/>	

SNMP Settings

SNMP Device Name	This field displays the router name defined at System > Admin Security .
SNMP Port	This option specifies the port which SNMP will use. The default port is 161 .
SNMPv1	This option allows you to enable SNMP version 1.
SNMPv2c	This option allows you to enable SNMP version 2c.
SNMPv3	This option allows you to enable SNMP version 3.
SNMP Trap	This option allows you to enable SNMP Trap. If enabled, the following entry fields will appear.
SNMP Trap Community	This setting specifies the SNMP Trap community name.
SNMP Trap Server	Enter the IP address of the SNMP Trap server.

To add a community for either SNMPv1 or SNMPv2c, click the **Add SNMP Community** button in the **Community Name** table, upon which the following screen is displayed:


SNMP Community	
Community Name	<input type="text"/>
Allowed Network	<input type="text"/> / <input type="text" value="255.255.255.0 (/24)"/> <input type="button" value="v"/>
<input type="button" value="Save"/> <input type="button" value="Cancel"/>	

SNMP Community Settings

Community Name	This setting specifies the SNMP community name.
-----------------------	---

Allowed Network	This setting specifies a subnet from which access to the SNMP server is allowed. Enter the subnet address here (e.g. <i>192.168.1.0</i>) and select the appropriate subnet mask.
------------------------	---

To define a user name for SNMPv3, click **Add SNMP User** in the **SNMPv3 User Name** table, upon which the following screen is displayed:

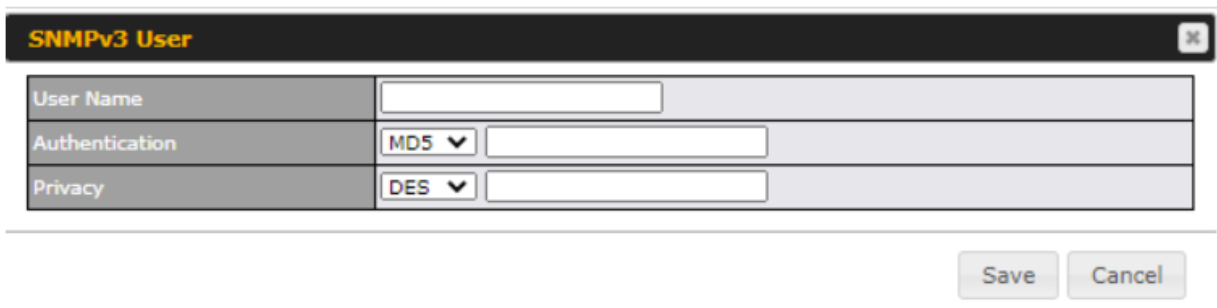

The image shows a dialog box titled "SNMPv3 User" with a close button in the top right corner. It contains three rows of configuration fields:

User Name	<input type="text"/>
Authentication	MD5 <input type="text"/>
Privacy	DES <input type="text"/>

At the bottom right of the dialog are two buttons: "Save" and "Cancel".

SNMPv3 User Settings

User Name	This setting specifies a user name to be used in SNMPv3.
------------------	--

Authentication Protocol	This setting specifies via a drop-down menu one of the following valid authentication protocols:
--------------------------------	--

- None
- MD5
- SHA

When MD5 or SHA is selected, an entry field will appear for the password.


Privacy

This setting specifies via a drop-down menu one of the following valid privacy protocols:

- NONE
- DES
- AES

When DES or AES is selected, an entry field will appear for the password.

Controller Management

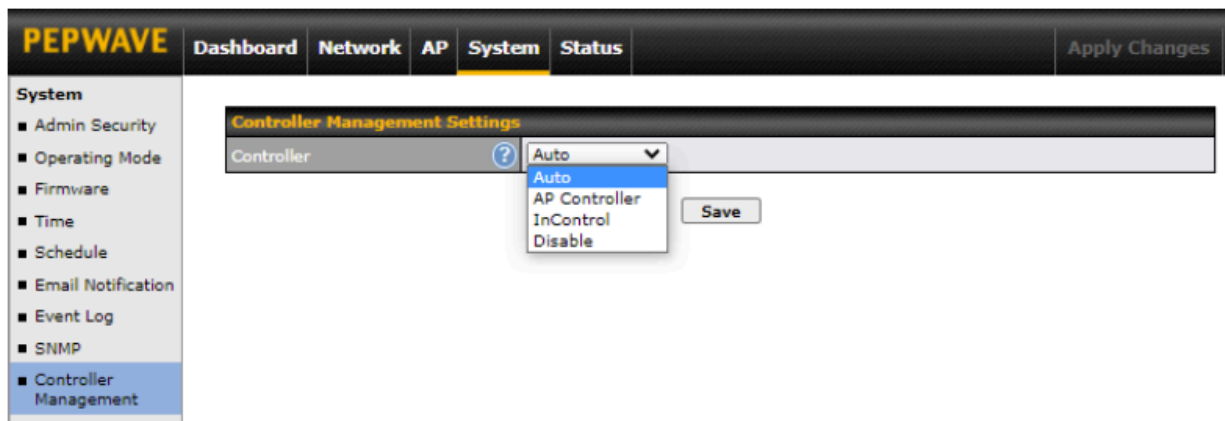

Here is the option to choose the controller management for the access point. This setting specifies via a drop-down menu one of the following valid authentication protocols:

- Auto – AP automatically assigned to active AP Controller.
- AP Controller – AP is controlled by Peplink Balance with AP controller feature.

AP Controller

Persistent Controller

Check the box **Persistent Controller** and enter the IP address of the Peplink Balance under Controller Host.

- InControl – AP is controlled by InControl*

InControl

Restricted to Status Reporting Only

When the box **Restricted to Status Reporting Only** is ticked, the AP will only report its status, but can't be managed or configured by InControl.

Privately Host InControl

Check the box "**Privately Host InControl**" and enter the IP Address or hostname of your InControl Appliance.


- Disable – You can disable the controller feature on the AP.

*InControl is a cloud-based service which allows you to manage all of your Peplink and Pepwave devices with one unified system. With it, you can generate reports, gather statistics, and configure your devices automatically.

You can sign up for an InControl account at <https://incontrol2.peplink.com> (<https://incontrol2.peplink.com>). You can register your devices under the account, monitor their status, see their usage reports, and receive offline notifications.

Configuration

Backing up your Pepwave access point settings immediately after successful completion of the initial setup is strongly recommended. The functionality to download and upload Pepwave access point settings is found at **System > Configuration**.

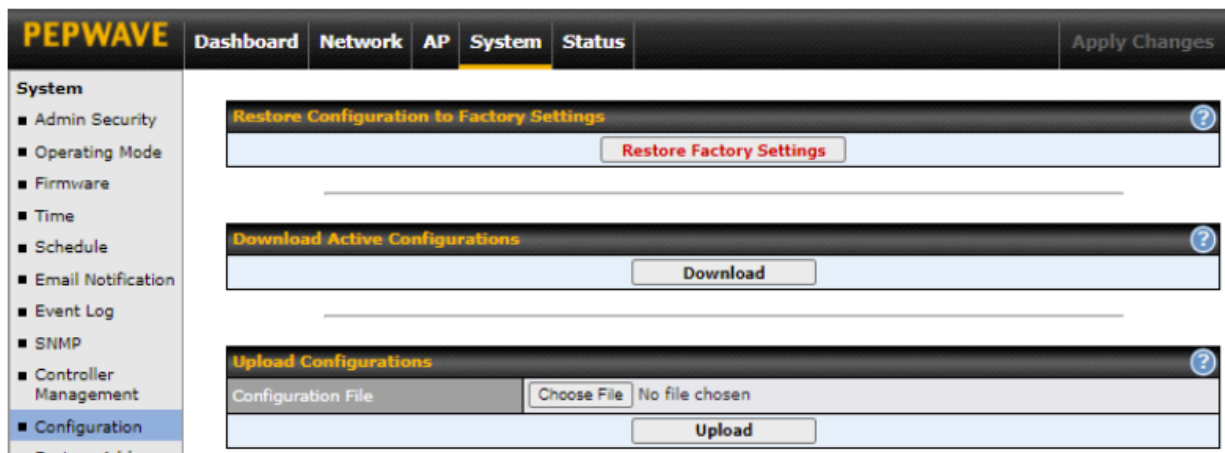

Configuration

Restore Configuration to Factory Settings

The **Restore Factory Settings** button is to reset the configuration to factory default settings. After clicking the button, you will need to click the **Apply Changes** button on the top right corner to make the settings effective.

Download Active Configurations


Click **Download** to backup the current active settings.

Upload Configurations

To restore or change settings based on a configuration file, click **Choose File** to locate the configuration file on the local computer, and then click **Upload**. The new settings can then be applied by clicking the **Apply Changes** button on the page header, or you can cancel the procedure by pressing **discard** on the main page of the web admin interface.

LED

*Please note that the following settings are available only for **AP One AX devices**.

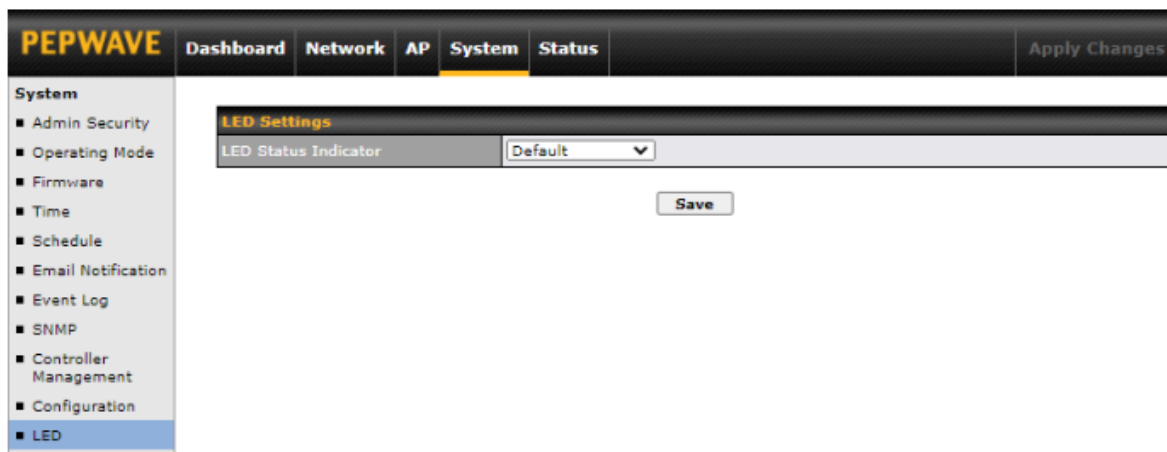

You can control the LED Status Indicator (available only for AP One AX devices). Available options are:

- Default
- Always Turn Off

Feature Add-Ons

The screenshot shows the Pepwave web interface. The top navigation bar includes 'PEPWAVE', 'Dashboard', 'Network', 'AP', 'System' (highlighted), and 'Status'. On the right of the bar is an 'Apply Changes' button. A left sidebar lists system configuration options: Admin Security, Operating Mode, Firmware, Time, Schedule, Email Notification, Event Log, SNMP, Controller Management, Configuration, and Feature Add-ons (highlighted). The main content area is titled 'Feature Activation'. It contains a label 'Activation Key' next to a large empty text input field. Below the input field is an 'Activate' button.

Some Pepwave access point models have features that can be activated upon purchase. Once the purchase is complete, you will receive an activation key. Enter the activation key into the **Activation Key** field, click **Activate**, and then click **Apply Changes**.

Reboot

The screenshot shows the Pepwave web interface. The top navigation bar includes 'PEPWAVE', 'Dashboard', 'Network', 'AP', 'System' (highlighted), and 'Status'. On the right of the bar is an 'Apply Changes' button. A left sidebar lists system configuration options: Admin Security, Operating Mode, Firmware, Time, Schedule, Email Notification, Event Log, SNMP, Controller Management, Configuration, Feature Add-ons, and Reboot (highlighted). The main content area is titled 'Reboot System' and includes a help icon (?). Below the title is the instruction 'Select the firmware you want to use to start up this device:'. There are two radio button options: 'Firmware 1: 3.9.0 build 1067' and 'Firmware 2: 3.9.1 build 1088 (Running)'. The second option is selected. At the bottom of the section is a 'Reboot' button.

Restart the access point with the **Reboot** button. For maximum reliability, the Pepwave access point can contain two copies of firmware; each copy can be a different version. You can select the firmware version you would like to reboot the device with. The firmware marked with **(Running)** is the current system boot up firmware.

Please note that a firmware upgrade will always replace the inactive firmware partition.

Tools


PING (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/tools/ping/>)

Traceroute (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/tools/traceroute/>)

Wake-on-LAN (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/tools/wake-on-lan/>)

WAN Analysis (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/system-tab/tools/wan-analysis/>)

PING

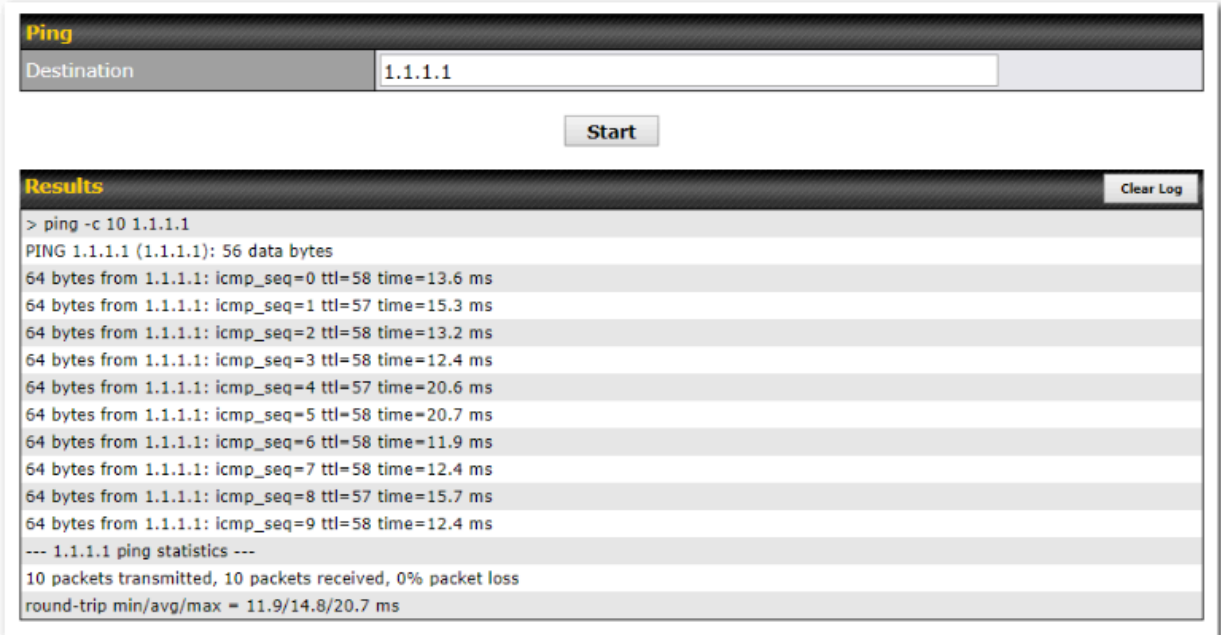

The screenshot shows the 'Ping' tool interface. At the top, there's a 'Destination' field containing '1.1.1.1' and a 'Start' button. Below this is a 'Results' section with a 'Clear Log' button. The results display the command '> ping -c 10 1.1.1.1' and a series of 10 ping attempts, each showing '64 bytes from 1.1.1.1: icmp_seq=X ttl=58 time=Y ms'. The final statistics show '10 packets transmitted, 10 packets received, 0% packet loss' and 'round-trip min/avg/max = 11.9/14.8/20.7 ms'.

Destination	Value
Destination	1.1.1.1


Start

Results Clear Log

```
> ping -c 10 1.1.1.1
PING 1.1.1.1 (1.1.1.1): 56 data bytes
64 bytes from 1.1.1.1: icmp_seq=0 ttl=58 time=13.6 ms
64 bytes from 1.1.1.1: icmp_seq=1 ttl=57 time=15.3 ms
64 bytes from 1.1.1.1: icmp_seq=2 ttl=58 time=13.2 ms
64 bytes from 1.1.1.1: icmp_seq=3 ttl=58 time=12.4 ms
64 bytes from 1.1.1.1: icmp_seq=4 ttl=57 time=20.6 ms
64 bytes from 1.1.1.1: icmp_seq=5 ttl=58 time=20.7 ms
64 bytes from 1.1.1.1: icmp_seq=6 ttl=58 time=11.9 ms
64 bytes from 1.1.1.1: icmp_seq=7 ttl=58 time=12.4 ms
64 bytes from 1.1.1.1: icmp_seq=8 ttl=57 time=15.7 ms
64 bytes from 1.1.1.1: icmp_seq=9 ttl=58 time=12.4 ms
--- 1.1.1.1 ping statistics ---
10 packets transmitted, 10 packets received, 0% packet loss
round-trip min/avg/max = 11.9/14.8/20.7 ms
```

The ping test tool tests connectivity by pinging the specified destination IP address. The ping utility is located at **System > Tools > Ping**.

Traceroute

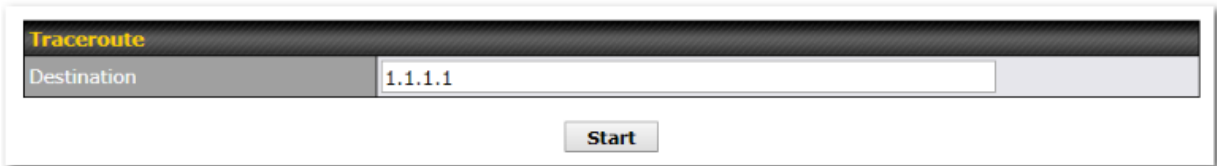

The Traceroute utility interface is a simple web form. It has a title bar 'Traceroute' in orange. Below it, there is a label 'Destination' and a text input field containing '1.1.1.1'. At the bottom center, there is a 'Start' button.

The traceroute test tool traces the routing path to the specified IP address. The traceroute test utility is located at **System > Tools > Traceroute**.

Wake-on-LAN




The Wake-on-LAN utility interface is part of the Pepwave web UI. It features a top navigation bar with 'PEPWAVE' and tabs for 'Dashboard', 'Network', 'AP', 'System' (selected), and 'Status'. An 'Apply Changes' button is on the right. A left sidebar lists 'System' and 'Tools' categories with various sub-items. The 'Wake-on-LAN' item under 'Tools' is highlighted. The main content area has a title 'Wake-on-LAN' and a form with a 'Wake-on-LAN Target' label, a dropdown menu showing 'Custom MAC Address...', a text input field with '00:00:00:00:00:00', and a 'Send' button.


Pepwave access points can send Magic Packets to any client specified from the Web UI. To access this feature, navigate to **System > Tools > Wake-on-LAN**.

Select a client from the drop-down list and click **Send** to send a Magic Packet.

WAN Analysis

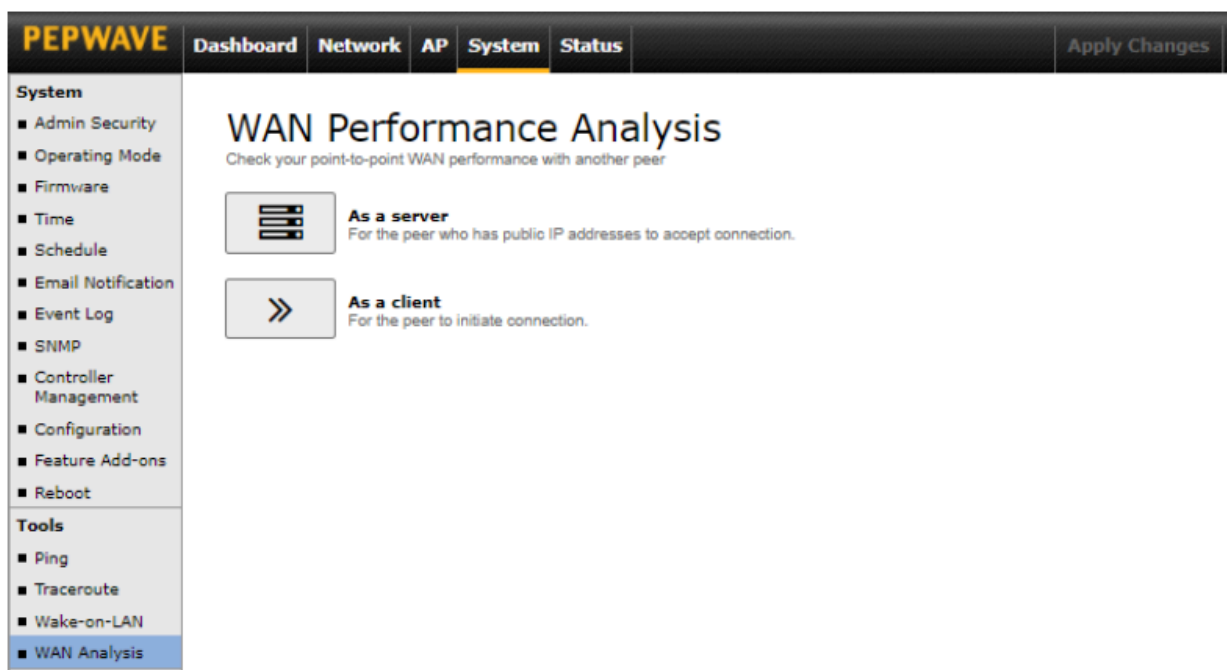

The WAN Analysis feature allows you to run a WAN to WAN speed test between two Peplink devices. You may set up a device as either a server or a client. However, one device must be set up as a server to run the speed tests, and the server must have a public IP address.

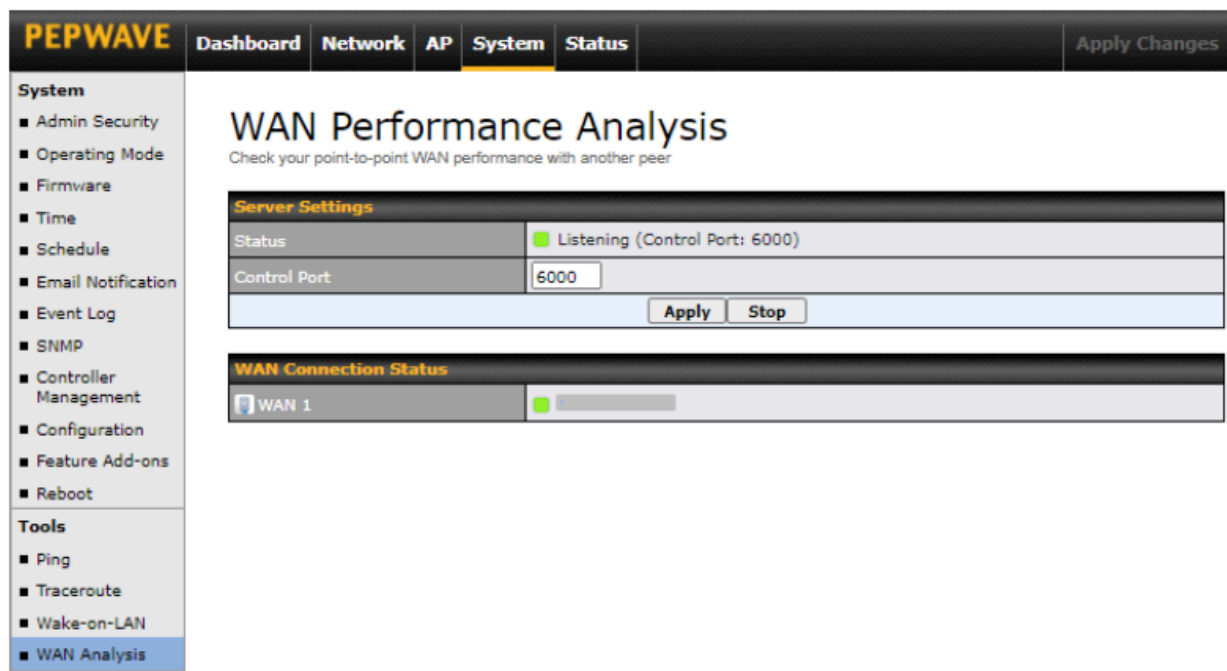

The default **Control Port** is 6000 and it can be customized if required. The IP address of the WAN interface will be shown in the **WAN Connection Status** section.

PEPWAVE

DashboardNetworkAPSystemStatus

Apply Changes

System

Admin Security
Operating Mode
Firmware
Time
Schedule
Email Notification
Event Log
SNMP
Controller Management
Configuration
Feature Add-ons
Reboot

Tools

Ping
Traceroute
Wake-on-LAN
WAN Analysis

WAN Performance Analysis

Check your point-to-point WAN performance with another peer

Client Settings

Control Port	6000	
Data Port	63552 - 63559	
Type	<input checked="" type="radio"/> TCP <input type="radio"/> UDP	
Direction	<input checked="" type="radio"/> Upload <input type="radio"/> Download	
Duration	20 seconds (5 - 600)	

Data Streams

Local WAN Connection	Remote IP Address	
1. -- Not Used --		✗
2. -- Not Used --		✗
3. -- Not Used --		✗
4. -- Not Used --		✗
5. -- Not Used --		✗
6. -- Not Used --		✗
7. -- Not Used --		✗
8. -- Not Used --		+


Start Test

The client side has a few more settings that can be changed. Make sure that the **Control Port** matches what is entered on the server side. Select the WAN(s) that will be used for testing and enter the server's WAN IP address(es). Once all of the options have been set, click the **Start Test** button.

Data Streams Parameters

Type	TCP	
Direction	Upload	
Duration	20 seconds	
	Local	Remote
Stream 1	<div></div>	<div></div>

Throughput

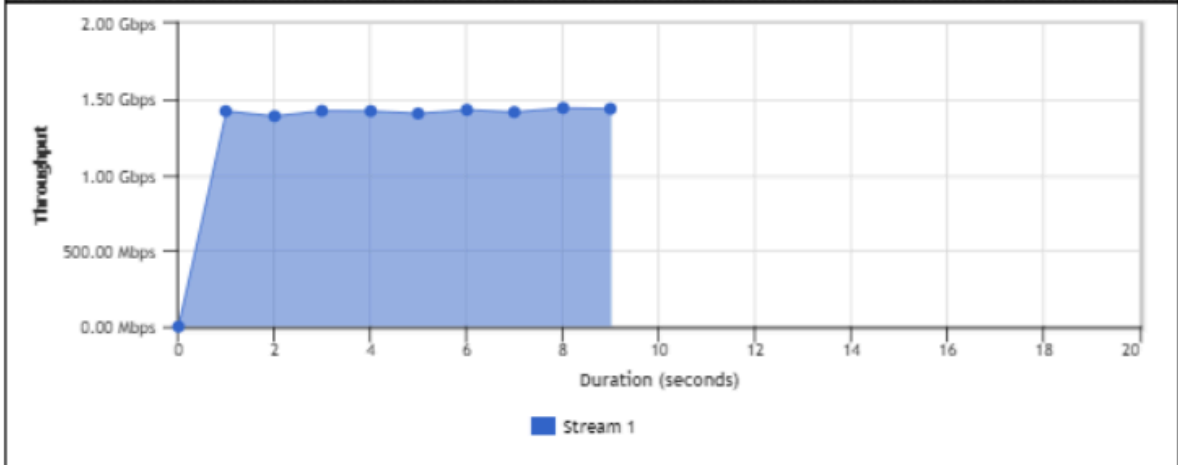

Results

1.0s:	1419.4795 Mbps	0 retrans /	362 KB cwnd
2.0s:	1386.3755 Mbps	0 retrans /	362 KB cwnd
3.0s:	1421.8435 Mbps	0 retrans /	362 KB cwnd
4.0s:	1420.3658 Mbps	0 retrans /	362 KB cwnd
5.0s:	1404.0306 Mbps	0 retrans /	362 KB cwnd
6.0s:	1428.0091 Mbps	0 retrans /	362 KB cwnd
7.0s:	1413.4903 Mbps	0 retrans /	362 KB cwnd
8.0s:	1440.1140 Mbps	0 retrans /	362 KB cwnd
9.0s:	1435.2691 Mbps	0 retrans /	362 KB cwnd

The test output will show the **Data Streams Parameters**, the **Throughput** as a graph, and the **Results**.

The test can be run again once it is complete by clicking the **Start** button or you can click **Close** and change the parameters for the test.

Ch9. Status Tab

The displays available on the **Status** tab help you monitor device data, client activity, event log, and more.

Device

PEP WAVE

Dashboard

Network

AP

System

Status

Apply Changes

Status

Device

Client List

Event Log

WAN Quality

Usage Reports

Real-Time

Hourly

Daily

Monthly

Logout

System Information

Device Name	AP-One-Flex- 1000
Model	Pepwave AP One Flex
Product Code	APO-FLX
Hardware Revision	4
Serial Number	
Firmware	3.9.1 build 1088
PepVPN Version	10.0.0
InControl Managed Configuration	AP
Host Name	ap-one-flex- 1000
Uptime	13 minutes
System Time	Mon Apr 11 20:20:22 +08 2022
Dagnostic Report	Download
Remote Assistance	Turn On

MAC Address

WAN	
-----	--

[Legal](#)

System Information

Device Name	This is the name specified in the Device Name field located at System > Admin Security .
Model	This displays the model of the device.
Hardware Revision	This displays the hardware version of this device.
Serial Number	This displays the serial number of this device.
Firmware	This displays the firmware version this device is currently running.
PepVPN Version	This displays the current PepVPN version.
Host name	This displays the hostname of the device.
Uptime	This displays the length of time since the device has been rebooted.
System Time	This displays the current system time.

Diagnostic Report

The **Download** link is for exporting a diagnostic report file required for system investigation.

Remote Assistance

Click **Turn On** to enable remote assistance.

The second table shows the MAC address of each connected LAN/WAN interface. To view your device's End User License Agreement (EULA), follow the **Legal link**.

Important Note

If you encounter issues and would like to contact the Peplink Support Team (<https://contact.peplink.com/secure/create-support-ticket.html> (<https://contact.peplink.com/secure/create-support-ticket.html>)), please download the diagnostic report file and attach it along with a description of your issue.

Active Session

Information on active sessions can be found at **Status > Active Sessions > Overview**.

*Please note that the following active session will be available only when your access point is operating in **Router Mode**.

PEPWAVE Dashboard Network AP System **Status** Apply Changes

Status

- Device
- Active Sessions**
- Client List
- Event Log

WAN Quality

Usage Reports

- Real-Time
- Hourly
- Daily

Overview Search

Session data captured within one minute. [Refresh](#)

Service	Inbound Sessions	Outbound Sessions
No known sessions		

Interface	Inbound Sessions	Outbound Sessions
WAN 1	0	0

This screen displays the number of sessions initiated by each application. Click on each service listing for additional information. This screen also indicates the number of sessions initiated by each WAN port. In addition, you can see which clients are initiating the most sessions.

You can also perform a filtered search for specific sessions. You can filter by subnet, port, protocol, and interface. To perform a search, navigate to **Status > Active Sessions > Search**.

PEP WAVE

DashboardNetworkAPSystem**Status**

Apply Changes

Status

Device

Active Sessions

Client List

Event Log

WAN Quality

Usage Reports

Real-Time

Hourly

Daily

Monthly

Logout

OverviewSearch

Session data captured 2 mins ago. Refresh

IP / Subnet

Source or Destination

255.255.255.255 (/32)

Port

Source or Destination

Protocol / Service

Any

Interface

☐ WAN 1

Search

Outbound

Protocol	Source IP	Destination IP	Service	Interface	Idle Time
No sessions					

Total searched results: 0

Inbound

Protocol	Source IP	Destination IP	Service	Interface	Idle Time
No sessions					

Total searched results: 0

Transit

Protocol	Source IP	Destination IP	Service	Interface	Idle Time
No sessions					

Total searched results: 0

This **Active Sessions** section displays the active inbound/outbound sessions of each WAN connection on the Pepwave router. A filter is available to sort active session information. Enter a keyword in the field or check the box of one of the WAN connections to filter your search.

Client List

PEP WAVE

DashboardNetworkAPSystem**Status**

Apply Changes

Status

Device

Client List

Event Log

WAN Quality

Usage Reports

Real-Time

Hourly

Daily

Monthly

Filter

☐ Online Clients Only
 ☐ DHCP Clients Only


Client List


IP Address	Name	Download (kbps)	Upload (kbps)	MAC Address	Network Name (SSID)	Signal (dBm)
		0	0			
		0	0			
		0	0			
		0	0			
		0	0			
		0	0			
		0	0			
		0	0			
		94	41			-59
		0	0			-54
		0	0			

Scale: ☒ kbps ☐ Mbps


The **Client List** displays all currently connected clients. It lists DHCP and online client IP addresses, names (retrieved from the DHCP reservation table or defined by users), current download and upload rate, and MAC address.




In the client list table, there is a **Ban Client** feature which can be used to disconnect Wi-Fi clients by clicking the  button on the right.

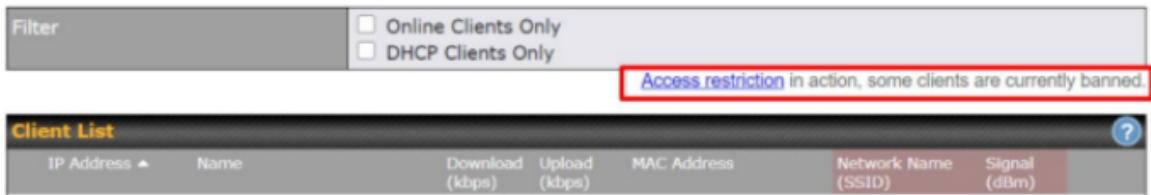

There is a blocklist on the same page after you have banned Wi-Fi clients.

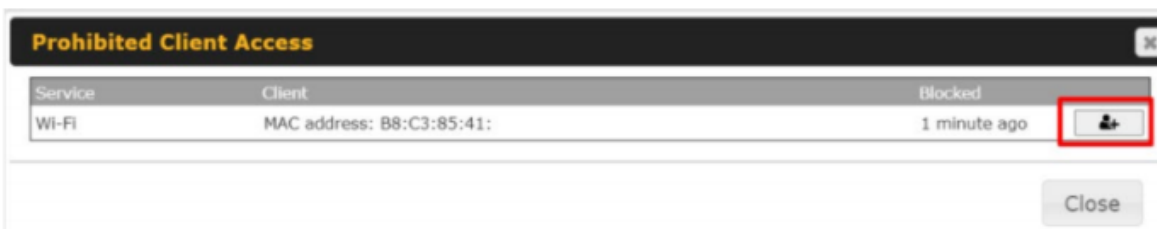

You may also unblock Wi-Fi clients when the client devices need to reconnect to the network by clicking the  button on the right.

Event Log

PEPWAVE

DashboardNetworkAPSystem**Status**

Apply Changes

Status

■ Device

■ Client List

■ Event Log

WAN Quality

Usage Reports

■ Real-Time

■ Hourly

■ Daily

■ Monthly

Device Event Log

Device Event Log

Auto Refresh

Dec 29 05:04:16	System: WAN Analysis server started (control port: 6000, max. streams: 8)
Dec 29 00:13:15	System: Time synchronization successful (0.pepwave.pool.ntp.org)
Dec 29 00:12:33	System: Wi-Fi AP Normal Mode
Dec 29 00:12:29	System: Time synchronization successful (InControl)
Jan 01 00:00:54	WAN: WAN 1 disconnected (Cold standby)
Jan 01 00:00:33	System: Started up (3.7.3 build 1056)
Dec 28 08:56:43	System: Time synchronization successful
Dec 28 08:51:42	System: Time synchronization fail
Dec 27 18:50:04	System: Time synchronization successful
Dec 27 18:45:02	System: Time synchronization fail
Dec 27 03:43:16	System: Time synchronization successful (0.pepwave.pool.ntp.org)
Dec 27 03:42:33	System: Wi-Fi AP Normal Mode
Dec 27 03:42:30	System: Time synchronization successful (InControl)
Jan 01 00:00:54	WAN: WAN 1 disconnected (Cold standby)
Jan 01 00:00:33	System: Started up (3.7.3 build 1056)
Dec 26 04:18:55	System: Time synchronization successful (0.pepwave.pool.ntp.org)
Dec 26 04:18:12	System: Wi-Fi AP Normal Mode
Dec 26 04:18:09	System: Time synchronization successful (InControl)
Jan 01 00:00:55	WAN: WAN 1 disconnected (Cold standby)
Jan 01 00:00:33	System: Started up (3.7.3 build 1056)
Dec 22 17:11:50	System: Time synchronization successful

Clear Log

The **Event Log** displays a list of all events associated with your access point. Check **Auto Refresh** to refresh log entries automatically. Click the **Clear Log** button to clear the log.

WAN Quality

The **Status > WAN Quality** allows you to select each WAN and view current WAN quality. Detailed information can be seen when selecting a point on the graph.

PEPWAVE

DashboardNetworkAPSystem**Status**

Apply Changes

Status

■ Device

■ Client List

■ Event Log

WAN Quality

Usage Reports

■ Real-Time

■ Hourly

■ Daily

■ Monthly

WAN Quality

Connection

WAN 1

Latency

Usage Reports


Real-Time (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch9-status-tab/usage-reports/real-time/>)

Hourly (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch9-status-tab/usage-reports/hourly/>)

Daily (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch9-status-tab/usage-reports/daily/>)


Monthly (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch9-status-tab/usage-reports/monthly/>)

Real-Time

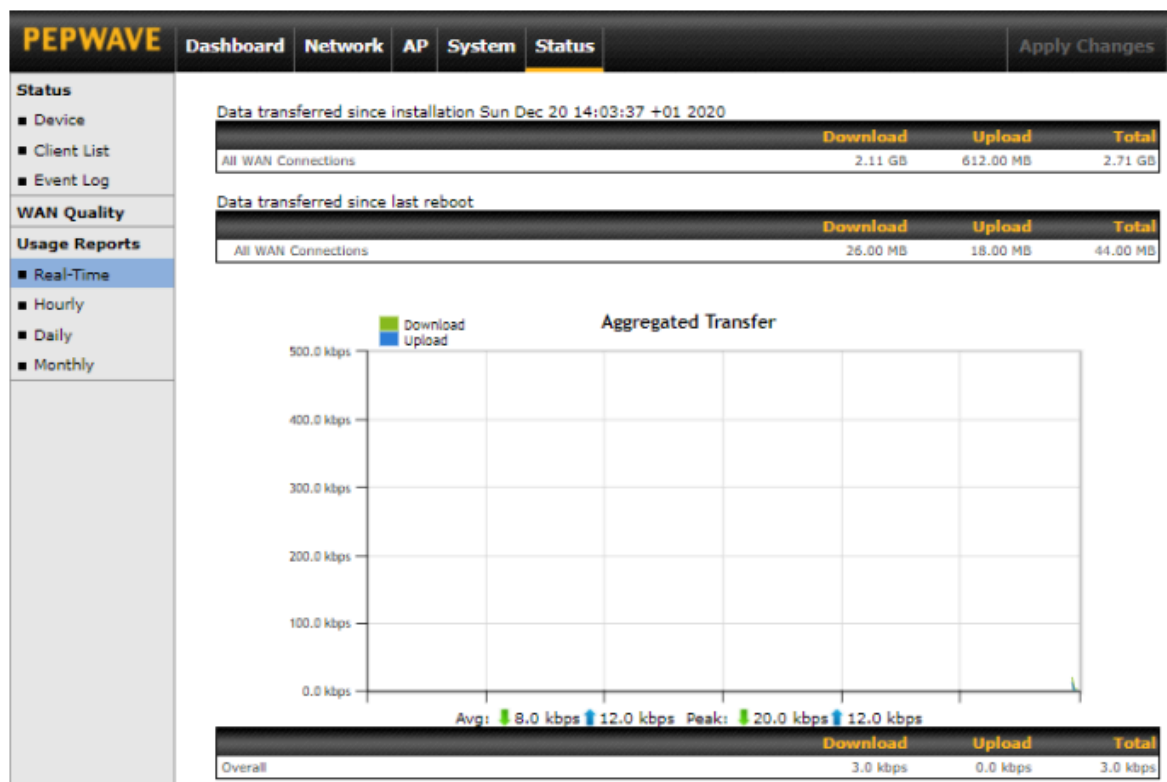


The **Data transferred since installation** table indicates how much network traffic has been processed by the device since the first bootup. The **Data transferred since last reboot** table indicates how much network traffic has been processed by the device since the last boot up.

Hourly

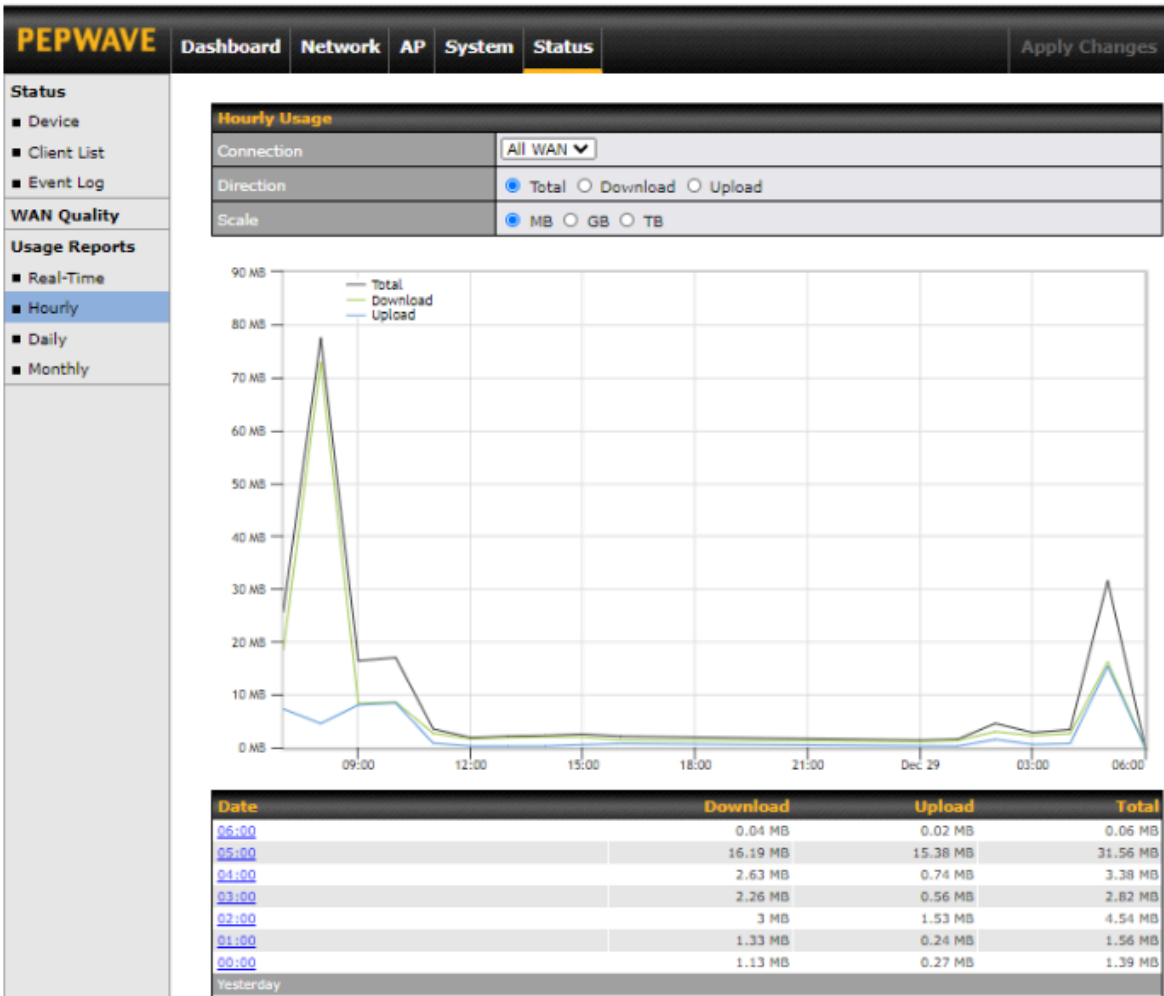


This page shows the hourly bandwidth usage for all WAN connections. Individual connections may be viewed by selecting the desired connection from the drop-down menu.

Daily

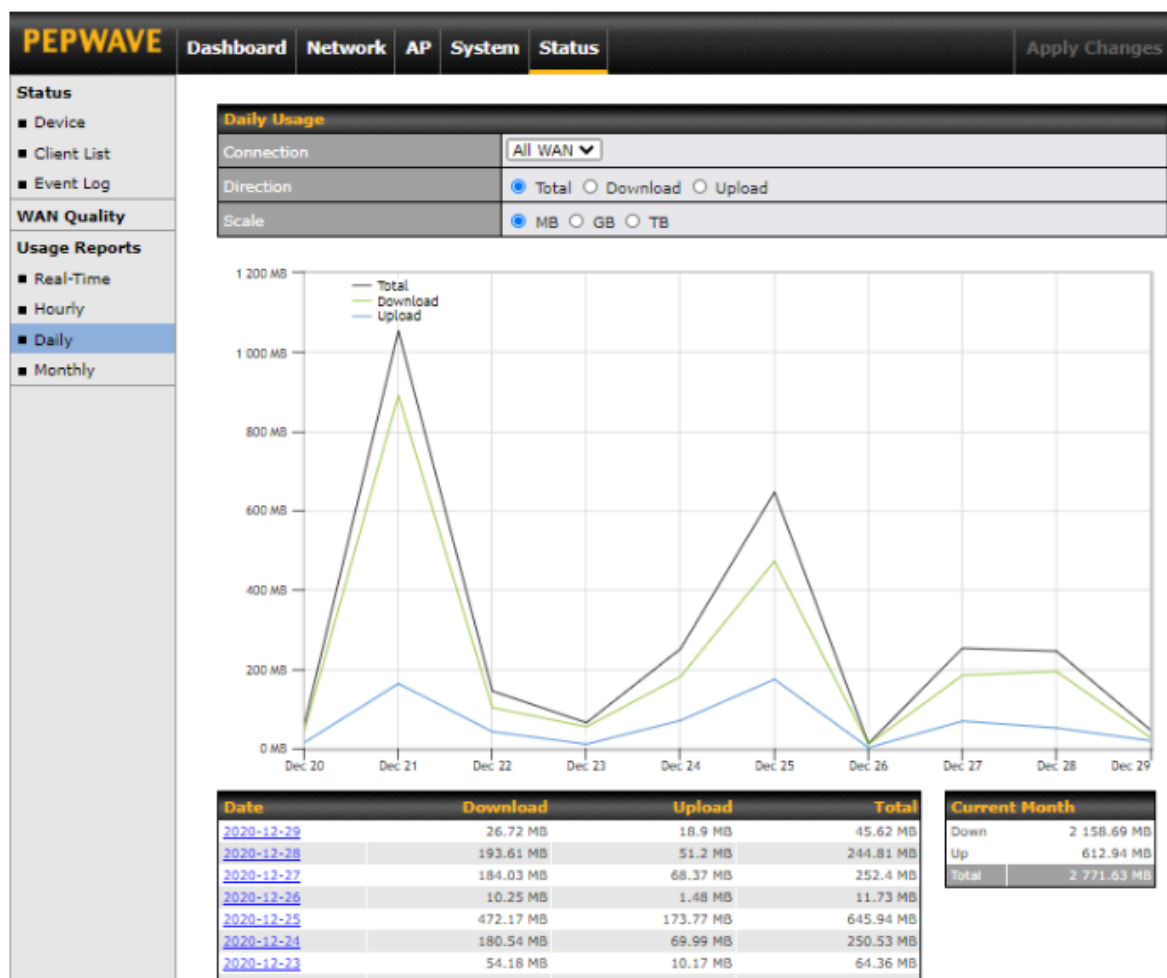

This page shows the daily bandwidth usage for all WAN connections. Individual connections may be viewed by selecting the connection from the drop-down menu. You can check the **Current Billing Cycle** table for that WAN connection to be displayed. Click on a date to view the client bandwidth usage of that specific date. The scale of the graph can be set to display megabytes (MB), gigabytes (GB), or terabytes (TB).

Monthly

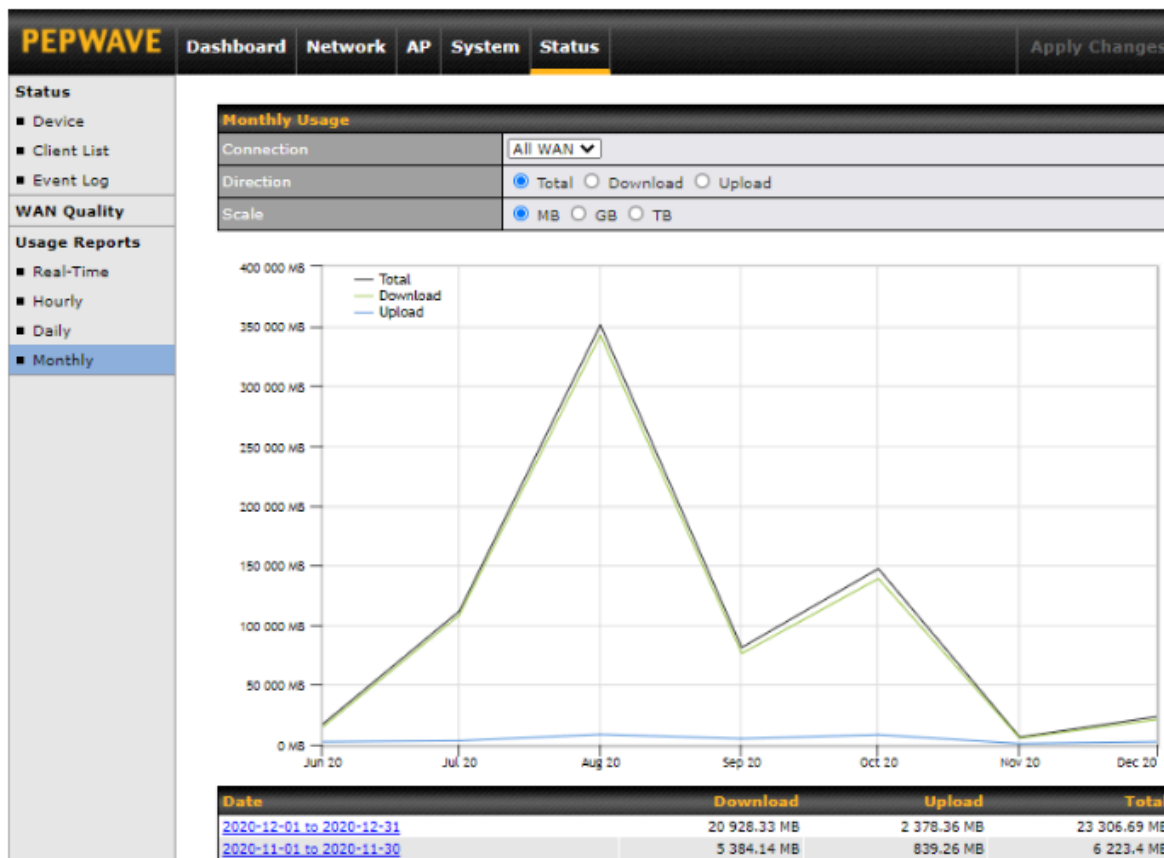

This page shows the monthly bandwidth usage for each WAN connection. You can check the usage of each particular connection and view the information by **Billing Cycle** or by **Calendar Month**. Select the first two rows to view the client bandwidth usage for the last two months. The scale of the graph can be set to display megabytes (**MB**), gigabytes (**GB**), or terabytes (**TB**).

Ch10. Restoring Factory Defaults

To restore the factory default settings on a Pepwave AP One router, follow the steps below:

1. Locate the reset button on the front or back panel of the Pepwave AP One router.
2. With a paperclip, press and keep the reset button pressed.

Note: There is a dual function to the reset button.

Hold for 5 seconds for admin password reset (Note: The LED status light blinks in RED 2 times and release the button, green status light starts blinking)

Hold for 5 seconds for factory reset (Note: The LED status light blinks in RED 3 times and release the button, all WAN/LAN port lights start blinking)

After the Pepwave AP One router finishes rebooting, the factory default settings will be restored.

Important Note

All previous configurations and bandwidth usage data will be lost after restoring factory default settings. Regular backup of configuration settings is strongly recommended.

Ch11. Appendix

AP One AX (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch11-appendix/ap-one-ax/>)

AP One AC mini (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch11-appendix/federal-communication-commission-interference-statement-ap-one-ac-mini/>)

AP One Rugged HW2 (<https://manual.peplink.com/documentation/pepwave-ap-one-firmware-3-9-2-user-manual/ch11-appendix/ap-one-rugged-hw2/>)

AP One AX

Federal Communication Commission Interference Statement (AP One AX Lite)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Industry Canada Statement (AP One AX Lite)

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le present produit est conforme aux specifications techniques applicables d'Innovation, Sciences et Developpement economique Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisee aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
 - (2) l'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, meme si le brouillage est susceptible d'en
-
- (i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
 - (ii) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and

The high-power radars are allocated as primary users (i.e. priority users) of the band

5725-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

(i) Le dispositif fonctionnant dans la bande 5150-5250 MHz est reserve uniquement pour une utilisation a l'interieur afin de reduire les risques de brouillage prejudiciable aux systemes de satellites mobiles utilisant les memes canaux;

(ii) Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant la bande 5725-5850 MHz doit se conformer a la limitation P.I.R.E specifiee pour l'exploitation point a point et non point a point, selon le cas.

En outre, les utilisateurs devraient aussi etre avises que les utilisateurs de radars de haute puissance sont designes utilisateurs principaux (c.-a-d., qu'ils ont la priorite) pour les bande 5725-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Radiation Exposure Statement

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet equipement est conforme avec l'exposition aux radiations ISED definies pour un environnement non contr6le. Cet equipement doit etre installe et utilise a une distance minimum de 20 cm entre le radiateur et votre corps.

Federal Communication Commission Interference Statement (AP One AX)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

CE Statement for Pepwave Routers (AP One AX Lite)

DECLARATION OF CONFORMITY


We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Industrial. Building., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	PEPWAVE / PEPLINK Wireless Product
Model name of the appliance	AP One AX Lite APO-AX-LITE Pepwave AP One AX Lite
Trade name of the appliance	PEPWAVE / PEPLINK

The construction of the appliance is in accordance with the following standards:

EN 301 893 V2.1.1
EN 300 328 V2.2.2
EN 50385: 2017
EN 301 489-1 V2.2.3
EN 301 489-17 V3.1.1
EN 55032: 2015 + A11:2020
EN 55035: 2017 + A11:2020
EN 61000-3-2: 2014
EN 61000-3-3: 2013
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL	PT	RO	SK	SI	ES	SE	UK(NI)

2.4GHz (2412 – 2472 MHz) : 19.74 dBm

5GHz (5150 – 5250 MHz) : 22.94 dBm

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

contact as: <https://www.peplink.com> (<http://www.peplink.com/>)

UK Statement for Pepwave Routers (AP One AX Lite)

UK DECLARATION OF CONFORMITY

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	PEPWAVE / PEPLINK Wireless Product
Model name of the appliance	AP One AX Lite APO-AX-LITE Pepwave AP One AX Lite
Trade name of the appliance	PEPWAVE / PEPLINK

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

UK legislation

Radio Equipment Regulations 2017

UK Designed Standard

EN 300 328 V2.2.2

EN 301 893 V2.1.1

EN 50385:2017

Other Standards Applied

EN 301 489-1 V2.2.3

EN 301 489-17 V3.1.1

EN 55032: 2015 + A11:2020


EN 55035: 2017 + A11:2020

EN 61000-3-2: 2014

EN 61000-3-3: 2013

EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

CE Statement for Pepwave Routers (AP One AX)


We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Industrial Building., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	PEPWAVE / PEPLINK Wireless Product
Model name of the appliance	AP One AX AP One ENT AX APO-ENT-AX APO-AX PRB-11AX Pepwave AP One AX Pepwave AP One Enterprise AX Peplink AP One AX Peplink AP One Enterprise AX AP One Enterprise AX
Trade name of the appliance	PEPWAVE / PEPLINK

The construction of the appliance is in accordance with the following standards:

EN 301 893 V2.1.1
EN 300 328 V2.2.2
EN 62311 (European Council Recommendation 1999/519/EC)
EN 301 489-1 V2.2.3
Draft EN 301 489-17 V3.2.0
EN 55032: 2015 + AC:2016-07
EN 55035: 2017
EN IEC 61000-3-2: 2019
EN 61000-3-3: 2013+A1:2019
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL	PT	RO	SK	SI	ES	SE	UK(NI)

2.4GHz (2412 – 2472 MHz) : 19.87 dBm

5GHz (5150 – 5250 MHz) : 22.78 dBm

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

contact as: <https://www.peplink.com/> (http://www.peplink.com/)

UK Statement for Pepwave Routers (AP One AX)

UK DECLARATION OF CONFORMITY

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	PEPWAVE / PEPLINK Wireless Product
Model name of the appliance	AP One AX AP One ENT AX APO-ENT-AX APO-AX PRB-11AX Pepwave AP One AX Pepwave AP One Enterprise AX Peplink AP One AX Peplink AP One Enterprise AX AP One Enterprise AX
Trade name of the appliance	PEPWAVE / PEPLINK

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

UK legislation

Radio Equipment Regulations 2017

UK Designed Standard

EN 300 328 V2.2.2
EN 301 893 V2.1.1

Other Standards Applied

EN 62311 (European Council Recommendation 1999/519/EC)
EN 301 489-1 V2.2.3
Draft EN 301 489-17 V3.2.0
EN 55032: 2015 + AC:2016-07
EN 55035: 2017
EN IEC 61000-3-2: 2019
EN 61000-3-3: 2013+A1:2019
EN 62368-1:2014 + A11:2017

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

AP One AC mini

Federal Communication Commission Interference Statement (AP One AC mini)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful

interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Industry Canada Statement (AP One AC mini)

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le present produit est conforme aux specifications techniques applicables d'Innovation, Sciences et Developpement economique Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisee aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, meme si le brouillage est susceptible d'en

(i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

(ii) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and

The high-power radars are allocated as primary users (i.e. priority users) of the band 5725-5850 MHz and that these radars could cause interference and/or damage to LE- LAN devices.

(i) Le dispositif fonctionnant dans la bande 5150-5250 MHz est reserve uniquement pour une utilisation a l'interieur afin de reduire les risques de brouillage prejudiciable aux systemes de satellites mobiles utilisant les memes canaux;

(ii) Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant la bande 5725-5850 MHz doit se conformer a la limitation P.I.R.E specifiee pour l'exploitation point a point et non point a point, selon le cas.

En outre, les utilisateurs devraient aussi etre avises que les utilisateurs de radars de haute puissance sont designes utilisateurs principaux (c.-a-d., qu'ils ont la priorite) pour les bande 5725-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Radiation Exposure Statement

This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet equipement est conforme avec l'exposition aux radiations ISED definies pour un environnement non contr6le. Cet equipement doit etre installe et utilise a une distance minimum de 20 cm entre le radiateur et votre corps.

CE Statement for Pepwave Routers (AP One AC Mini)

DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	Pismo Labs Technology Limited
Contact information of the manufacturer	Unit A5, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	Pepwave / Peplink / Pismo Wireless Product
Model name of the appliance	AP One AC mini
Trade name of the appliance	Pepwave / Peplink / Pismo

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.1.1
EN 301 893 V2.1.1
EN 301 489-1 V2.1.1
EN 301 489-17 V3.1.1
EN 55032:2015
EN 55024:2010+A1:2015
EN 61000-3-2:2014
EN 61000-3-3:2013
EN 50385:2017
EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

Yours sincerely,



Keith Chau
General Manager
Peplink International Limited

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL	PT	RO	SK	SI	ES	SE	UK(NI)

2.4GHz (2412 – 2472 MHz) : 19.89 dBm

5GHz (5150 – 5250 MHz) : 22.70 dBm

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 2cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

contact as: <https://www.peplink.com> (<http://www.peplink.com/>)

AP One Rugged HW2

Federal Communication Commission Interference Statement

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference and

(2) this device must accept any interference received, including interference that may cause

undesired operation.

Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

VCCI Class A Statement


この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A

CE Statement for Pepwave Routers (AP One Rugged HW2)

DECLARATION OF CONFORMITY


We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Industrial. Building., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	Peplink Pepwave Wireless Product
Model name of the appliance	AP One Rugged APO-AC-RUG
Trade name of the appliance	 PEPWAVE

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.2.2
EN 301 893 V2.1.1
EN 62311: 2020
EN 301 489-1 V2.2.3
EN 301 489-17 V3.2.4
EN 55032: 2015 + A11:2020
EN 55035: 2017 + A11:2020
EN 61000-3-2: 2019 + A1:2021
EN 61000-3-3: 2013 + A1:2019
EN 62368-1:2020 + A11:2020

Yours sincerely,

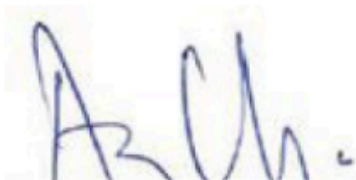

Antony Chong
Director of Hardware Engineering
Peplink International Limited

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL	PT	RO	SK	SI	ES	SE	UK(NI)

2.4GHz (2412 – 2472 MHz) : 19.95 dBm

5GHz (5150 – 5250 MHz) : 22.65 dBm


This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

contact as: <https://www.peplink.com/> (<https://www.peplink.com/>)

UK Statement for Pepwave Routers (AP One Rugged HW2)

UK DECLARATION OF CONFORMITY

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Industrial. Building., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	Peplink Pepwave Wireless Product
Model name of the appliance	AP One Rugged APO-AC-RUG
Trade name of the appliance	

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

UK legislation

Radio Equipment Regulations 2017

UK Designed Standard

EN 300 328 V2.2.2

EN 301 893 V2.1.1

Other Standards Applied

EN 62311: 2020

EN 301 489-1 V2.2.3

EN 301 489-17 V3.2.4

EN 55032: 2015 + A11:2020


EN 55035: 2017 + A11:2020

EN 61000-3-2: 2019 + A1:2021

EN 61000-3-3: 2013 + A1:2019

EN 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

AP Pro AX

Federal Communication Commission Interference Statement (AP Pro AX)

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

-This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Professional Installation Instruction

This product is designed for specific application and needs to be installed by qualified personnel who has RF and related rule knowledge and need to get the Peplink certified to install the product. The general user shall not attempt to install or change the settings.

Innovation, Science and Economic Development Canada Statement (AP Pro AX)

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Le present produit est conforme aux specifications techniques applicables d'Innovation, Sciences et Developpement economique Canada.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisee aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, meme si le brouillage est susceptible d'en

(i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

(ii) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and

The high-power radars are allocated as primary users (i.e. priority users) of the band 5725-5850 MHz and that these radars could cause interference and/or damage to LE- LAN devices.

(i) Le dispositif fonctionnant dans la bande 5150-5250 MHz est reserve uniquement pour une utilisation a l'interieur afin de reduire les risques de brouillage prejudiciable aux systemes de satellites mobiles utilisant les memes canaux;

(ii) Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant la bande 5725-5850 MHz doit se conformer a la limitation P.I.R.E specifiee pour l'exploitation point a point et non point a point, selon le cas.

En outre, les utilisateurs devraient aussi etre avises que les utilisateurs de radars de haute puissance sont designes utilisateurs principaux (c.-a-d., qu'ils ont la priorite) pour les bande 5725-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Radiation Exposure Statement


This device complies with the ISED radiation exposure limit set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet equipement est conforme avec l'exposition aux radiations ISED definies pour un environnement non contr6le. Cet equipement doit etre installe et utilise a une distance minimum de 20 cm entre le radiateur et votre corps.

CE Statement for Pepwave Routers (AP Pro AX)

DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	Peplink Pepwave Wireless Product
Model name of the appliance	AP Pro AX APP-AX-IP67
Trade name of the appliance	

The construction of the appliance is in accordance with the following standards:

EN 300 328 V2.2.2
EN 301 893 V2.1.1
EN IEC 62311:2020
EN 55032: 2015 + A11:2020
EN 55035: 2017 + A11:2020
EN 301 489-1 V2.2.3
EN 301 489-17 V3.2.4
EN 61000-3-2: 2014
EN IEC 61000-3-2: 2019 + A1:2021
EN 61000-3-3: 2013 + A1:2019+A2:2021
EN IEC 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

	AT	BE	BG	HR	CY	CZ	DK	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL	PT	RO	SK	SI	ES	SE	UK(NI)

2.4GHz (2412 – 2472 MHz) : 19.86 dBm

5GHz (5150 – 5250 MHz) : 29.66 dBm

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.


This equipment is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range in above countries.

contact as: <https://www.peplink.com/> (<https://www.peplink.com/>)

UK Statement for Pepwave Routers (AP Pro AX)

DECLARATION OF CONFORMITY

We affirm the electrical equipment manufactured by us fulfils the requirements of the Radio Equipment Directive 2014/53/EU.

Name of manufacturer	PISMO LABS TECHNOLOGY LIMITED
Contact information of the manufacturer	A8, 5/F, HK Spinners Ind. Bldg., Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong tel. (852) 2990 7600, fax. (852) 3007 0588 e-mail: cs@peplink.com
Description of the appliance	Peplink Pepwave Wireless Product
Model name of the appliance	AP Pro AX APP-AX-IP67
Trade name of the appliance	 PEP WAVE

We declare under sole responsibilities that the above product conforms to the applicable requirements of following relevant UK legislation and designed standards.

UK legislation

Radio Equipment Regulations 2017

UK Designed Standard

EN 300 328 V2.2.2
EN 301 893 V2.1.1

Other Standards Applied

EN IEC 62311: 2020
EN 301 489-1 V2.2.3
EN 301 489-17 V3.2.4
EN 55032: 2015 + A11:2020
EN 55035: 2017 + A11:2020
EN 61000-3-2: 2014
EN IEC 61000-3-2: 2019 + A1:2021
EN 61000-3-3: 2013 + A1:2019+A2:2021
EN IEC 62368-1:2020 + A11:2020

Yours sincerely,



Antony Chong
Director of Hardware Engineering
Peplink International Limited

