

Peplink Balance Two

Versatile Small Branch Office Router

Specifications

Balance Two	
WAN Interface	2x 10/100/1000M Ethernet Ports 1x USB Interface
LAN Interface	4x 10/100/1000M Ethernet Ports
Router Throughput	1Gbps
Recommended Users	25-150
Number of VPN/SpeedFusion Peers	2/5/10/20 #
PepVPN/SpeedFusion Throughput	150Mbps
Power Input	Device: 12V DC
Power Consumption	40W (max.)
Dimension (W x D x H)	7.4 x 6.9 x 1.7 inches 188 x 175 x 42 mm
Weight	2.2 pound / 1.2 kg
Operating Temperature	32° – 104°F / 0° – 40°C
Humidity	20% – 90% (non-condensing)
Certifications	CE, FCC, RoHS
Warranty	1-Year Limited Warranty
Package Content	Balance Two, 1x of 12V3.3A PSU, Power Cord (ACW-614)

PepVPN Peers are enabled by default. Can be increased to 5/10/20 Peers using license.

Ordering Information

Product Code	Description
BPL-TWO	Balance Two, Advanced Dual-WAN Router for Branch Networking

Feature Add-On

Product Code	Description
BPL-TWO-LC-SF	SpeedFusion bonding license
PVN-LC-05	Up to 5 PepVPN/ SpeedFusion Peers License Key for Selected Models
PVN-LC-10	Up to 10 PepVPN/ SpeedFusion Peers License Key for Selected Models
PVN-LC-20	Up to 20 PepVPN/ SpeedFusion Peers License Key for Selected Models

Features

WAN USB 4G/3G Modem Support Support for PPPoE, Static IP, DHCP Support for Dynamic DNS services WAN Link Health Check Intelligent Failover Bandwidth Allowance Monitor	AP Controller AP Controller Support Wi-Fi Usage Statistics Complete VPN Solution PepVPN/SpeedFusion Site-to-Site VPN Bandwidth Aggregation Hot Failover 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing L2TP with IPsec VPN Server PPTP VPN Server RADIUS, LDAP Authentication IPsec VPN (Network-to-Network)	Load Balancing Intelligent Failover Session Persistence Per-Service Load Distribution Multiple Algorithms Networking NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP WINS Server	Advanced QoS User Groups Bandwidth Reservation Individual Bandwidth Limit Application Prioritization By User Groups SIP, HTTPS, VPN QoS Custom Application QoS Web Blocking Blacklist Captive Portal Support Support for Wired and Wireless LAN Clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page	Device Management Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3 Package Content Balance Two 12V Power Supply
---	--	---	--	---



Peplink Balance Two

Versatile Small Branch Office Router




1Gbps Throughput, Under \$1000*

With 2x GE WAN, 4x GE LAN, and a WLAN controller, the Balance Two provides ample connectivity for smaller enterprise branch offices.



* Pricing applies to US region only, other regions may vary.

Intelligent Traffic Steering

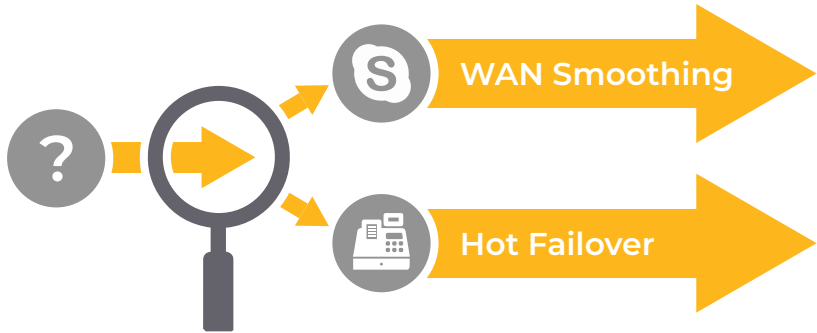

Traffic Steering automatically identifies packets by their application (e.g. Skype, PoS, ERP). Apply different SpeedFusion technologies ^ to different kinds of traffic.

^ PepVPN is supported on all models. SpeedFusion is an optional feature.

Fits Seamlessly in Any Office

The fanless design keeps the Balance Two whisper-quiet. Rear facing ports give the device a clean look, fitting any office environment.



Scalable, Centralized Management



Use InControl to make your deployment scalable. Centralize VLAN, outbound policy, firewall rules, configuration profiles and more in minutes.



5Gstore.com
833-5GSTORE
sales@5Gstore.com
Ref. no: balance-two-202105-v2