

Pepwave MAX User Manual



MAX Series

User Manual

Pepwave Products:

MAX 700 / HD2 / HD2 IP67 / HD2 Mini / HD2 MBX 5G / HD2 MBX / HD Dome / HD Dome Pro / HD4 / HD4 MBX 5G / HD4 MBX / MBX Mini / HD4 IP67 / Transit / Transit Duo / Transit 5G / Transit Core / Transit Mini / Transit Pro E / Transit Duo Pro / BR1 Classic / BR1 MK2 / BR1 Slim / BR1 ENT / BR1 M2M / BR1 Mini (HW2) / BR1 Mini (HW3) / BR1 Mini 5G / BR1 Mini Core / BR1 Mini Core (HW3) / BR1 Mini M2M / BR1 ESN / BR1 Pro LTE / BR1 Pro (CAT-20) / BR1 Pro 5G / BR2 Pro / BR1 IP55 / BR1 IP67 / BR2 IP55 / On-The-Go / HD2 with MediaFast / HD4 with MediaFast / SpeedFusion Engine / UBR LTE / UBR Plus / PDX

Pepwave Firmware 8.4.0

January 2024

Introduction and Scope

Pepwave routers provide link aggregation and load balancing across multiple WAN connections, allowing a combination of technologies like 3G HSDPA, EVDO, 4G LTE, Wi-Fi, external WiMAX dongle, and satellite to be utilized to connect to the Internet.

The MAX wireless SD-WAN router series has a wide range of products suitable for many different deployments and markets. Entry level SD-WAN models such as the MAX BR1 are suitable for SMEs or branch offices. High-capacity SD-WAN routers such as the MAX HD2 are suitable for larger

organizations and head offices.

This manual covers setting up Pepwave routers and provides an introduction to their features and usage.

Tips

Want to know more about Pepwave routers? Visit our YouTube Channel (<http://www.youtube.com/PeplinkChannel>) for a video introduction (<http://www.youtube.com/PeplinkChannel#p/u/1/1ste4dQV-V8>)!



<https://youtu.be/13M-JHRAICA> (<https://youtu.be/13M-JHRAICA>)

Glossary

The following terms, acronyms, and abbreviations are frequently used in this manual:

| Term | Definition |
|-------|--|
| 3G | 3rd generation standards for wireless communications (e.g., HSDPA) |
| 4G | 4th generation standards for wireless communications (e.g., LTE) |
| DHCP | Dynamic Host Configuration Protocol |
| DNS | Domain Name System |
| EVDO | Evolution-Data Optimized |
| FQDN | Fully Qualified Domain Name |
| HSDPA | High-Speed Downlink Packet Access |
| HTTP | Hyper-Text Transfer Protocol |
| ICMP | Internet Control Message Protocol |
| IP | Internet Protocol |

| | |
|-------------|---------------------------------------|
| LAN | Local Area Network |
| MAC Address | Media Access Control Address |
| MTU | Maximum Transmission Unit |
| MSS | Maximum Segment Size |
| NAT | Network Address Translation |
| PPPoE | Point to Point Protocol over Ethernet |
| QoS | Quality of Service |
| SNMP | Simple Network Management Protocol |
| TCP | Transmission Control Protocol |
| UDP | User Datagram Protocol |
| VPN | Virtual Private Network |
| VRRP | Virtual Router Redundancy Protocol |
| WAN | Wide Area Network |
| WINS | Windows Internet Name Service |
| WLAN | Wireless Local Area Network |

Ch1. Product Features

Pepwave routers enable all LAN users to share broadband Internet connections, and they provide advanced features to enhance Internet access. Our Max BR wireless routers support multiple SIM cards. They can be configured to switch from using one SIM card to another SIM card according to different criteria, including wireless network reliability and data usage.

Our MAX HD series wireless routers are embedded with multiple 4G LTE modems, and allow simultaneous wireless Internet connections through multiple wireless networks. The wireless Internet connections can be bonded together using our SpeedFusion technology. This allows better reliability, larger bandwidth, and increased wireless coverage compared to use only one 4G LTE modem.

Below is a list of supported features on Pepwave routers. Features vary by model. For more information, please see peplink.com/products.

Supported Network Features

WAN

- Ethernet WAN connection in full/half duplex
- Static IP support for PPPoE
- Built-in cellular modems

- USB mobile connection(s)
- Wi-Fi WAN connection
- Network address translation (NAT)/port address translation (PAT)
- Inbound and outbound NAT mapping
- IPsec NAT-T and PPTP packet passthrough
- MAC address clone and passthrough
- Customizable MTU and MSS values
- WAN connection health check
- Dynamic DNS (supported service providers: changeip.com, dyndns.org, no-ip.org, tzo.com and DNS-O-Matic)
- Ping, DNS lookup, and HTTP-based health check

LAN

- Wi-Fi AP
- Ethernet LAN ports
- DHCP server on LAN
- Extended DHCP option support
- Static routing rules
- VLAN on LAN support

VPN

- PepVPN with SpeedFusion™
- PepVPN performance analyzer
- X.509 certificate support
- VPN load balancing and failover among selected WAN connections
- Bandwidth bonding and failover among selected WAN connections
- IPsec VPN for network-to-network connections (works with Cisco and Juniper)
- Ability to route Internet traffic to a remote VPN peer
- Optional pre-shared key setting
- SpeedFusion™ throughput, ping, and traceroute tests
- PPTP server
- PPTP and IPsec passthrough

Firewall

- Outbound (LAN to WAN) firewall rules
- Inbound (WAN to LAN) firewall rules per WAN connection
- Intrusion detection and prevention
- Specification of NAT mappings
- Outbound firewall rules can be defined by destination domain name

Captive Portal

- Splash screen of open networks, login page for secure networks
- Customizable built-in captive portal
- Supports linking to outside page for captive portal

Outbound Policy

- Link load distribution per TCP/UDP service
- Persistent routing for specified source and/or destination IP addresses per TCP/UDP service
- Traffic prioritization and DSL optimization
- Prioritize and route traffic to VPN tunnels with Priority and Enforced algorithms

AP Controller

- Configure and manage Pepwave AP devices
- Review the status of connected APs

QoS

- Quality of service for different applications and custom protocols
 - User group classification for different service levels
 - Bandwidth usage control and monitoring on group- and user-level
 - Application prioritization for custom protocols and DSL/cable optimization
-

Other Supported Features

- User-friendly web-based administration interface
- HTTP and HTTPS support for web admin interface (default redirection to HTTPS)
- Configurable web administration port and administrator password
- Firmware upgrades, configuration backups, ping, and traceroute via web admin interface
- Remote web-based configuration (via WAN and LAN interfaces)
- Time server synchronization
- SNMP
- Email notification
- Read-only user access for web admin
- Shared IP drop-in mode
- Authentication and accounting by RADIUS server for web admin
- Built-in WINS servers*
- Syslog
- SIP passthrough
- PPTP packet passthrough
- Event log
- Active sessions
- Client list

- WINS client list *
- UPnP / NAT-PMP
- Real-time, hourly, daily, and monthly bandwidth usage reports and charts
- IPv6 support
- Support USB tethering on Android 2.2+ phones

* Not supported on MAX Surf-On-The-Go, and BR1 variants

Ch2. Pepwave MAX Mobile Router Overview

MAX 700 (<https://manual.peplink.com/pepwave-max-user-manual/#1418>)

MAX HD2 (<https://manual.peplink.com/pepwave-max-user-manual/#1420>)

MAX HD2 IP67 (<https://manual.peplink.com/pepwave-max-user-manual/#1422>)

MAX HD2 mini (<https://manual.peplink.com/pepwave-max-user-manual/#1424>)

MAX HD Dome (<https://manual.peplink.com/pepwave-max-user-manual/#1426>)

MAX HD Dome Pro (<https://manual.peplink.com/pepwave-max-user-manual/#1429>)

MAX Transit / MAX Transit Duo (CAT-12) (<https://manual.peplink.com/pepwave-max-user-manual/#1433>)

MAX Transit (CAT-18) (<https://manual.peplink.com/pepwave-max-user-manual/#1435>)

MAX Transit 5G (<https://manual.peplink.com/pepwave-max-user-manual/#1437>)

MAX Transit Mini (<https://manual.peplink.com/pepwave-max-user-manual/#1441>)

MAX Transit Pro E (<https://manual.peplink.com/pepwave-max-user-manual/#1443>)

MAX Transit Core (<https://manual.peplink.com/pepwave-max-user-manual/#1447>)

MAX Transit Duo Pro (<https://manual.peplink.com/pepwave-max-user-manual/#1451>)

MAX BR1 ESN (<https://manual.peplink.com/pepwave-max-user-manual/#1454>)

MAX HD2 and HD4 with MediaFast (<https://manual.peplink.com/pepwave-max-user-manual/#1456>)

MAX HD4 (<https://manual.peplink.com/pepwave-max-user-manual/#1458>)

MAX HD4 MBX (CAT-12) (<https://manual.peplink.com/pepwave-max-user-manual/#1460>)

MAX HD2/4 MBX (CAT-20) (<https://manual.peplink.com/pepwave-max-user-manual/#1462>)

MAX HD2/4 MBX (5G) (<https://manual.peplink.com/pepwave-max-user-manual/#1464>)

MAX MBX Mini (<https://manual.peplink.com/pepwave-max-user-manual/#1467>)

MAX HD4 IP67 (<https://manual.peplink.com/pepwave-max-user-manual/#1469>)

MAX BR1 Classic (<https://manual.peplink.com/pepwave-max-user-manual/#1471>)

MAX BR1 MK2 (<https://manual.peplink.com/pepwave-max-user-manual/#1473>)

MAX BR1 Slim (<https://manual.peplink.com/pepwave-max-user-manual/#1475>)

MAX BR1 Mini (HW2) (<https://manual.peplink.com/pepwave-max-user-manual/#1477>)

MAX BR1 Mini (HW3) (<https://manual.peplink.com/pepwave-max-user-manual/#1479>)

MAX BR1 Mini 5G (<https://manual.peplink.com/pepwave-max-user-manual/#4186>)

MAX BR1 Mini Core (<https://manual.peplink.com/pepwave-max-user-manual/#1481>)

MAX BR1 Mini M2M (<https://manual.peplink.com/pepwave-max-user-manual/#4122>)

MAX BR1 M2M (<https://manual.peplink.com/pepwave-max-user-manual/#1484>)

MAX BR1 ENT (<https://manual.peplink.com/pepwave-max-user-manual/#1486>)

MAX BR1 Pro (<https://manual.peplink.com/pepwave-max-user-manual/#1488>)

MAX BR1 Pro (CAT-20) (<https://manual.peplink.com/pepwave-max-user-manual/#1490>)

MAX BR1 Pro 5G (<https://manual.peplink.com/pepwave-max-user-manual/#1492>)

MAX BR2 Pro (<https://manual.peplink.com/pepwave-max-user-manual/#1494>)

MAX Hotspot (<https://manual.peplink.com/pepwave-max-user-manual/#1496>)

MAX BR1 IP55 (<https://manual.peplink.com/pepwave-max-user-manual/#1499>)

MAX BR2 IP55 (<https://manual.peplink.com/pepwave-max-user-manual/#1503>)

MAX BR1 IP67 (<https://manual.peplink.com/pepwave-max-user-manual/#1505>)

MAX On-The-Go (<https://manual.peplink.com/pepwave-max-user-manual/#1507>)

SpeedFusion Engine (<https://manual.peplink.com/pepwave-max-user-manual/#1509>)

UBR LTE (<https://manual.peplink.com/pepwave-max-user-manual/#1511>)

UBR Plus (<https://manual.peplink.com/pepwave-max-user-manual/#1513>)

PDX (<https://manual.peplink.com/pepwave-max-user-manual/#1515>)

MAX 700

Panel Appearance



Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi. Operation mode is WAN + AP under the AP.

LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Status Indicators | | |
|-------------------|--|---------------------|
| Status | | |
| OFF | | System initializing |
| Red | | Booting up or busy |
| Blinking red | | Boot up error |
| Green | | Ready |

| Wi-Fi AP Indicators | | |
|---------------------|--|----------------------|
| Wi-Fi 1 | | |
| OFF | | WiFi AP is disabled. |
| ON | | WiFi AP is enabled. |

| Wi-Fi WAN Indicators | | |
|----------------------------|----------------------|---|
| Wi-Fi 2 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |
| | | |
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 10 / 100/ 1000 Mbps |
| Orange LED | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |

MAX HD2

Panel Appearance

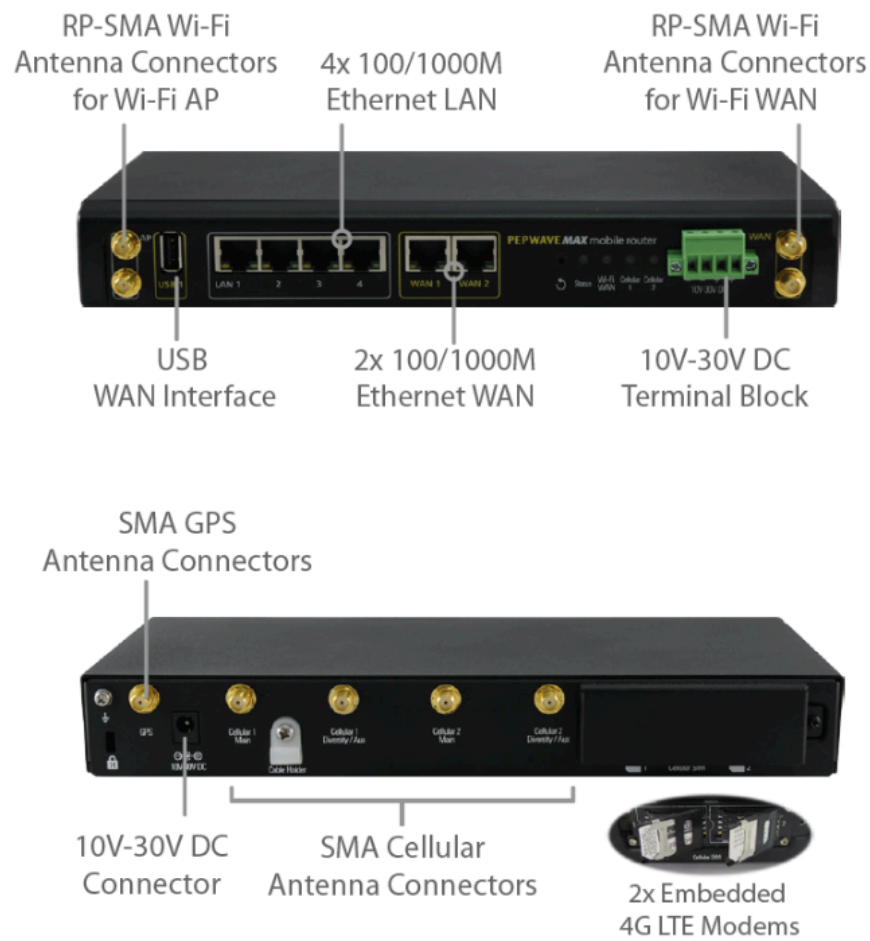

LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | | |
|----------------------|-----------------|--|
| Wi-Fi WAN | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|----------------------------|----------------------|---|
| Cellular 1 / Cellular 2 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| | | |
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX HD2 IP67

Panel Appearance

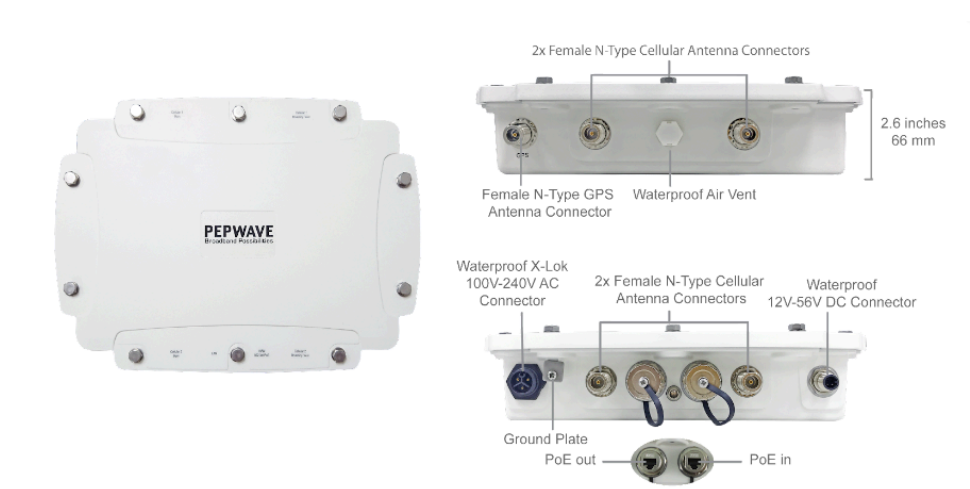


LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

MAX HD2 mini

Panel Appearance

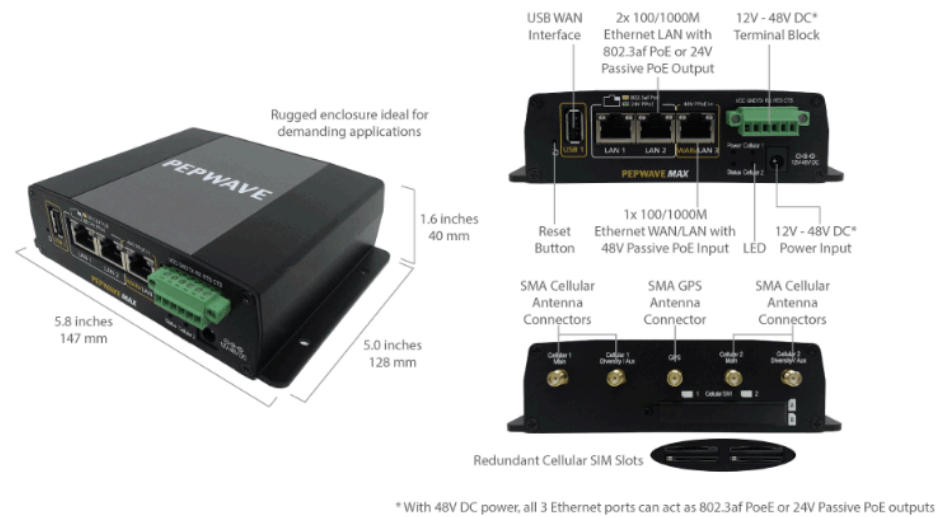

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |


| Cellular Indicators | | |
|---------------------|--|--|
|---------------------|--|--|

| | | | |
|--------------------------------|--|-----------------|----------------------------------|
| Cellular 1 / Cellular 2 | | OFF | Disabled or no SIM card inserted |
| | | Blinking slowly | Connecting to network(s) |
| | | Green | Connected to network(s) |

| | | |
|-----------------------------------|----------------------|---|
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | POE Enabled |
| | OFF | POE Disabled |
| Orange LED | Blinking | 10 / 100 / 1000 Mbps and Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX HD Dome


Panel Appearance

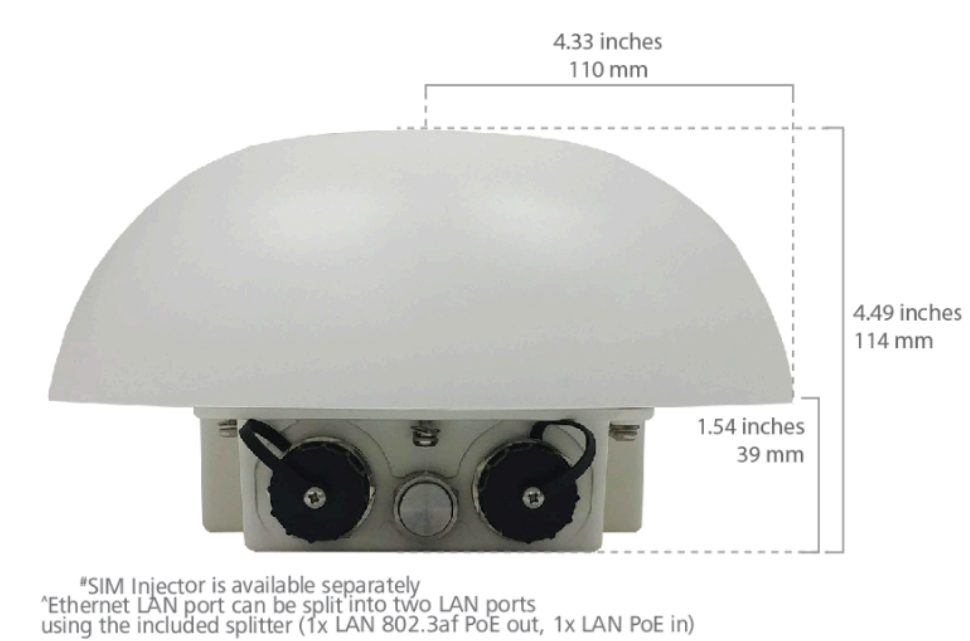



MAX HD Dome Pro

Panel Appearance

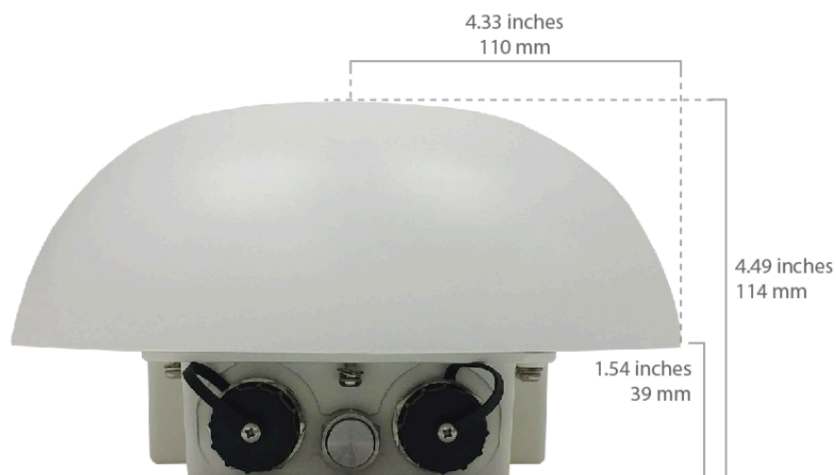


[#]SIM Injector is available separately
^AEthernet LAN port can be split into two LAN ports using the included splitter (1x LAN 802.3af PoE out, 1x LAN PoE in)



Ethernet Splitter




Mounting Bracket

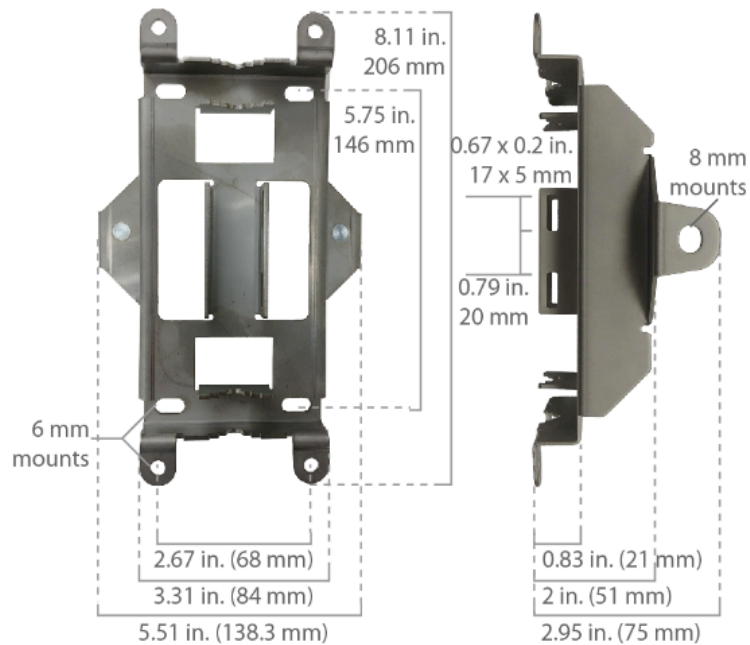


MAX Transit / MAX Transit Duo (CAT-12)

Panel Appearance

MAX-TST / MAX-TST-DUO (CAT-12)

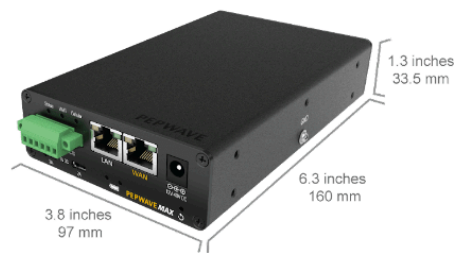


Front

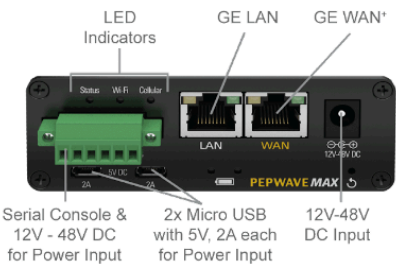


Back

MAX-TST (CAT-12)

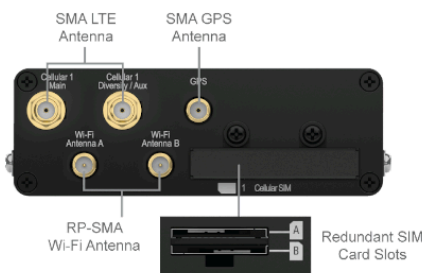

MAX-TST-DUO (CAT-12)

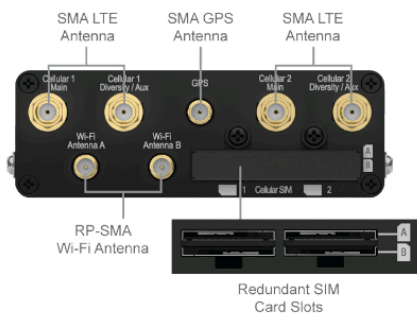

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|--------------------------|-----------------|----------------------------------|
| Cellular 1 / Cellular 2* | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

* For MAX-TST_DUO

| Wi-Fi Indicators | | |
|------------------|--|--|
|------------------|--|--|

| | | |
|-------|----------|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | Blinking | Wi-Fi AP is turn on |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX Transit (CAT-18)

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators |
|-------------------|
|-------------------|

| | | |
|---------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------------------|-----------------|----------------------------------|
| Cellular 1 / Cellular 2* | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

* For MAX-TST_DUO

| Wi-Fi Indicators | | |
|------------------|----------|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | Blinking | Wi-Fi AP is turn on |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX Transit 5G

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular 1 / Status | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |


| Wi-Fi Indicators | | |
|------------------|----------|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | Blinking | Wi-Fi AP is turn on |

| LAN and Ethernet WAN Ports | | |
|----------------------------|-----|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |

| | | |
|------------|----------------------|-----------------------------------|
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX Transit Mini

Panel Appearance

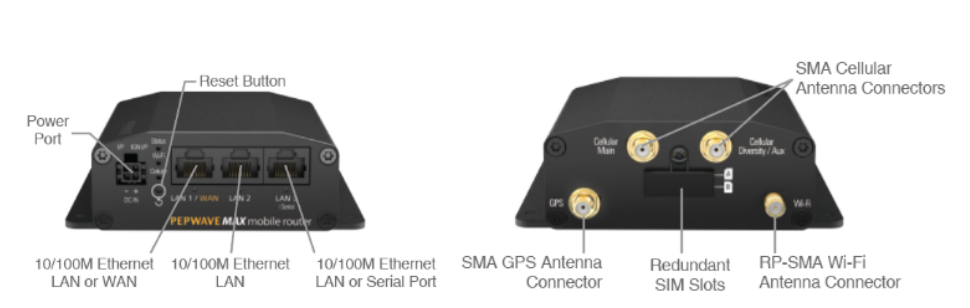

LED indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi Indicators | | |
|------------------|-----------------|--|
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|---------------------|--|--|
|---------------------|--|--|

| | | |
|----------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX Transit Pro E

Panel Appearance



LED indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| LAN 1 Port | | |
|------------------------------------|----------------------|---|
| Green LED | ON | POE Enabled |
| | OFF | POE Disabled |
| Orange LED | Blinking | 10 / 100 / 1000 Mbps and Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| LAN 2-3 Port and Ethernet WAN Port | | |

| | | |
|-------------------|----------------------|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

| | | |
|----------------------------|-----------------|----------------------------------|
| Cellular Indicators | | |
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX Transit Core

Panel Appearance



LED indicators

Status indicated in the front panel is as follows:

| | |
|----------------------|------------------|
| LED Indicator | |
| Power LED | OFF – Power off |
| | GREEN – Power on |
| LAN 1 Port | |

| | |
|--------------------------------|---|
| Green LED | ON – POE Enabled |
| | OFF – POE Disabled |
| Orange LED | Blinking – 10 / 100 / 1000 Mbps with activity |
| | OFF – No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports |
| LAN 2-3 Ports, WAN Port | |
| Right LED | GREEN – 1000 Mbps |
| | OFF – 10 / 100 Mbps or ports are not connected |
| Left LED | ORANGE – Port is connected without traffic |
| | Blinking – Data is transferring |
| | OFF – Port is not connected |
| Port Type | Auto MDI/MDI-X ports |
| Console & USB Ports | |
| Console Port | Reserved for engineering use |
| USB Ports | For connecting 4G/3G USB modems |

MAX Transit Duo Pro

Panel Appearance



LED indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|--------------------------|-----------------|----------------------------------|
| Cellular 1 / Cellular 2* | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| Wi-Fi Indicators | | |
|------------------|----------|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | Blinking | Wi-Fi AP is turn on |

| LAN and Ethernet WAN Ports | | |
|----------------------------|-----|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |

| | | |
|------------|----------------------|-----------------------------------|
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 ESN

Panel Appearance



LED indicators


The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|-----------------|--|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |
| Wi-Fi Indicators | | |
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX HD2 and HD4 with MediaFast

Panel Appearance

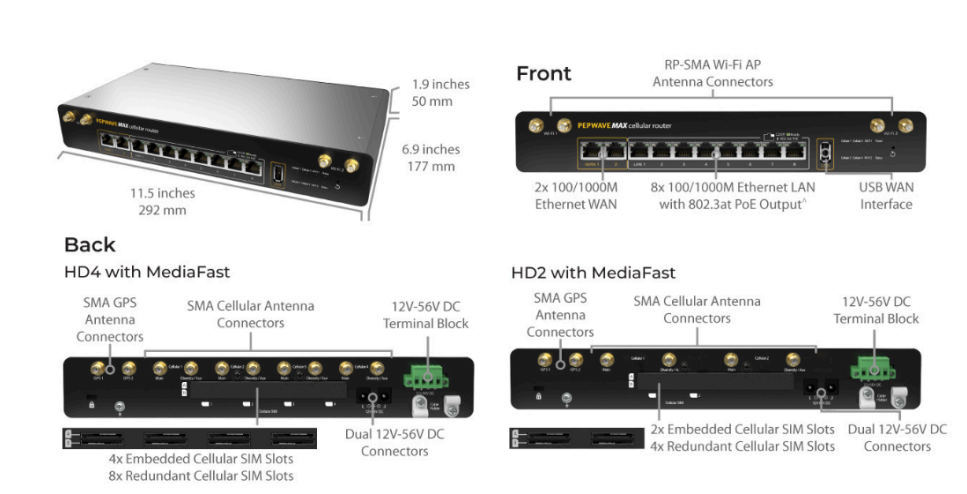

- Note:**
- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
 - The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4.

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | | |
|------------------------|----------------------|---|
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |
| | | |
| Wi-Fi AP Indicators | | |
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |
| | | |
| Cellular Indicators | | |
| Cellular 1 / 2 / 3 / 4 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| | | |
| LAN Ports | | |
| Green LED | ON | POE Enabled |
| | OFF | POE Disabled |
| Orange LED | Blinking | 10 / 100 / 1000 Mbps and Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| Ethernet WAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX HD4

Panel Appearance



Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi. Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4

LED Indicators


The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | | |
|------------------------|----------------------|---|
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |
| Wi-Fi AP Indicators | | |
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |
| Cellular Indicators | | |
| Cellular 1 / 2 / 3 / 4 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| LAN Ports | | |
| Green LED | ON | POE Enabled |
| | OFF | POE Disabled |
| Orange LED | Blinking | 10 / 100 / 1000 Mbps and Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| Ethernet WAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |

MAX HD4 MBX (CAT-12)

Panel Appearance

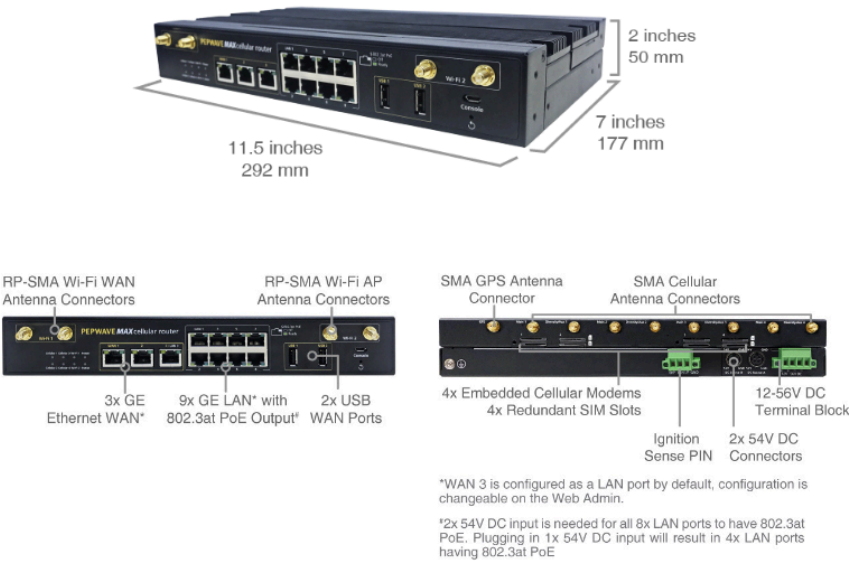

Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | |
|----------------------|--|
|----------------------|--|

| | | |
|---------|-----------------|---|
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to network(s) |
| | Blinking | Connected to network(s) with traffic |
| | ON | Connected to network(s) without traffic |

| Wi-Fi AP Indicators | | |
|---------------------|-----|----------------------|
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |


| Cellular Indicators | | |
|------------------------|-----------------|----------------------------------|
| Cellular 1 / 2 / 3 / 4 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| Ethernet WAN Ports | | |
|--------------------|----------|--|
| Right Green | OFF | Port is not connected or slowed than 1000 Mbps |
| | ON | Gigabit speed |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

| Ethernet LAN Ports | | |
|--------------------|----------|-----------------------------------|
| Right Green | OFF | PoE disabled |
| | ON | PoE enabled |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

MAX HD2/4 MBX (CAT-20)

Panel Appearance

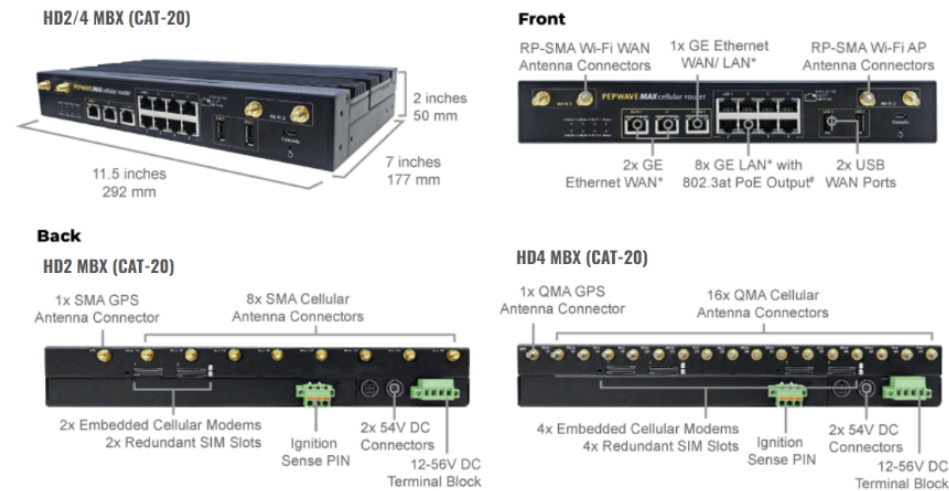

Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | | |
|----------------------|-----------------|---|
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to network(s) |
| | Blinking | Connected to network(s) with traffic |
| | ON | Connected to network(s) without traffic |

| | | |
|------------------------|-----------------|--|
| Wi-Fi AP Indicators | | |
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |
| Cellular Indicators | | |
| Cellular 1 / 2 / 3 / 4 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| Ethernet WAN Ports | | |
| Right Green | OFF | Port is not connected or slowed than 1000 Mbps |
| | ON | Gigabit speed |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |
| Ethernet LAN Ports | | |
| Right Green | OFF | PoE disabled |
| | ON | PoE enabled |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

MAX HD2/4 MBX (5G)

Panel Appearance

HD2 MBX 5G



* For the best performance and reliability, all RF connectors must be connected to the same type and performance antennas.

HD4 MBX 5G



* For the best performance and reliability, all RF connectors must be connected to the same type and performance antennas.

Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi WAN Indicators | |
|----------------------|--|
|----------------------|--|

| | | |
|----------------|-----------------|---|
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to network(s) |
| | Blinking | Connected to network(s) with traffic |
| | ON | Connected to network(s) without traffic |

Wi-Fi AP Indicators

| | | |
|----------------|-----|----------------------|
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |

Cellular Indicators

| | | |
|-------------------------------|-----------------|----------------------------------|
| Cellular 1 / 2 / 3 / 4 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

Ethernet WAN Ports

| | | |
|--------------------|----------|--|
| Right Green | OFF | Port is not connected or slowed than 1000 Mbps |
| | ON | Gigabit speed |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

Ethernet LAN Ports

| | | |
|--------------------|----------|-----------------------------------|
| Right Green | OFF | PoE disabled |
| | ON | PoE enabled |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

MAX MBX Mini

Panel Appearance



Note:

- For proper Wi-Fi performance and operations, please ensure all 4 Wi-Fi antenna connectors (labeled Wi-Fi 1 and Wi-Fi 2) have antennas attached.
- The LED indicators of Wi-Fi 1 & 2 shown as below is referring to the default settings of Wi-Fi Operation mode is WAN + AP under the AP. For more details, please refer to the section 25.4

LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| LED Indicator | | |
|---------------|-------|-----------|
| Power LED | OFF | Power off |
| | GREEN | Power on |

| Ethernet WAN Ports | | |
|--------------------|----------|--|
| Right Green | OFF | Port is not connected or slowed than 1000 Mbps |
| | ON | Gigabit speed |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |

Ethernet LAN Ports

| | | |
|--------------------------------|-----------------|---|
| Right Green | OFF | PoE disabled |
| | ON | PoE enabled |
| Left Orange | OFF | Port is not connected |
| | Blinking | Data is transferring |
| | ON | Port is connected without traffic |
| Wi-Fi WAN Indicators | | |
| Wi-Fi 1 | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to network(s) |
| | Blinking | Connected to network(s) with traffic |
| | ON | Connected to network(s) without traffic |
| Wi-Fi AP Indicators | | |
| Wi-Fi 2 | OFF | WiFi AP is disabled. |
| | ON | WiFi AP is enabled. |
| Cellular Indicators | | |
| Cellular 1 / 2 | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| Console & USB Ports | | |
| Console Port | | Reserved for engineering use |
| USB Ports | | For connecting 4G/3G USB modems |

Panel Appearance

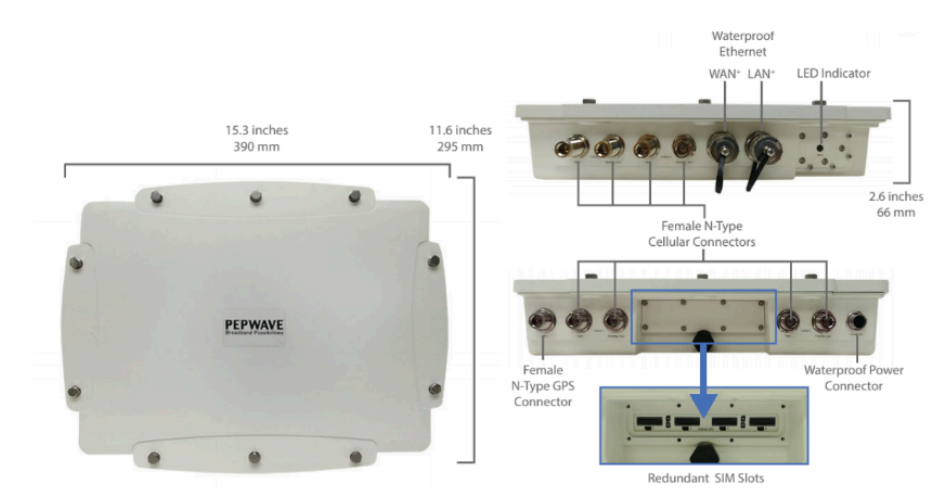

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

MAX BR1 Classic

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi Indicators | | |
|------------------|-----------------|--|
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX BR1 MK2

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi Indicators | | |
|------------------|-----------------|--|
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |


| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| LAN and Ethernet WAN Ports | | |
|----------------------------|--|--|
|----------------------------|--|--|

| | | |
|------------|----------------------|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 Slim

Panel Appearance

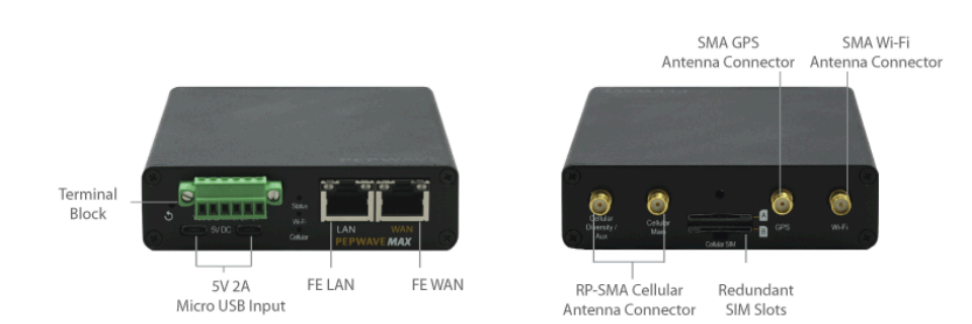

LED Indicators

The statuses indicated by the front panel LEDs are as follows:



| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Wi-Fi Indicators | | |
|------------------|-----------------|--|
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|----------------------------|----------------------|-----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| | | |
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 100 Mbps |
| | OFF | 10 Mbps |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 Mini (HW2)

Panel Appearance

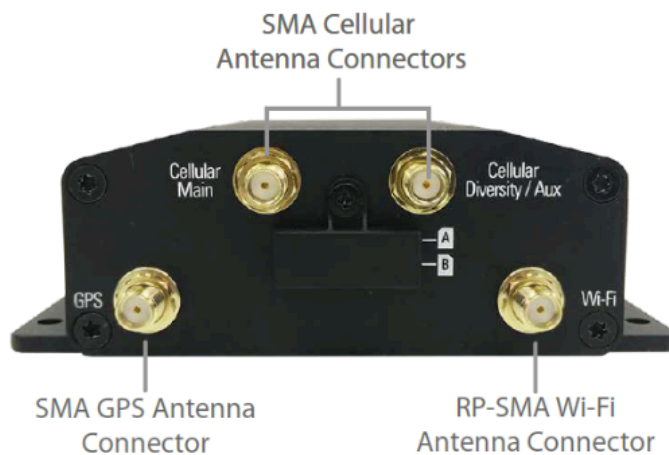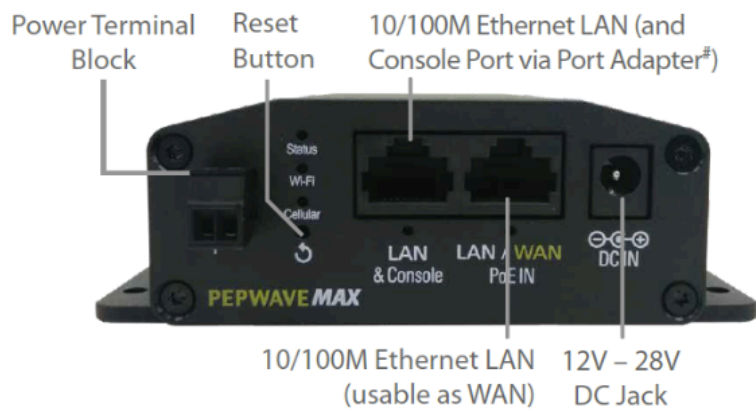

LED Indicators

Status Indicators

| | | |
|--------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

Cellular Indicators

| | | |
|----------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

Wi-Fi Indicators

| | | |
|-------|-----------------|--|
| Wi-Fi | OFF | Disabled intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

MAX BR1 Mini (HW3)

Panel Appearance




LED Indicators

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| Wi-Fi Indicators | | |
|------------------|-----|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | ON | Wi-Fi AP is turn on |

MAX BR1 Mini 5G

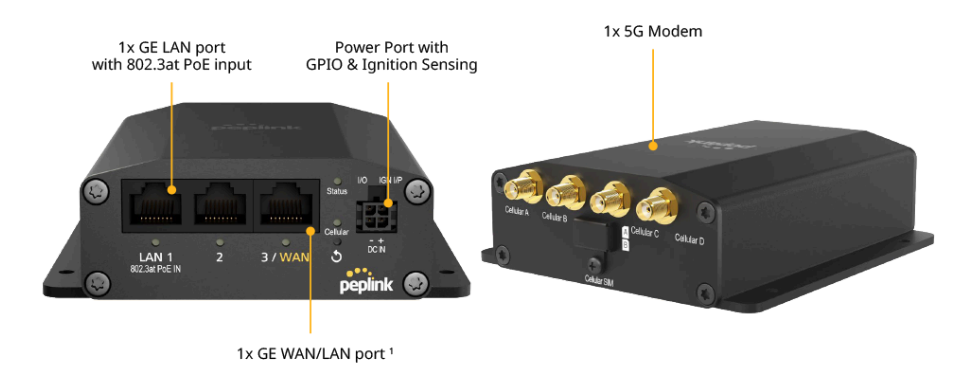

LED Indicators


The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX BR1 Mini Core

Panel Appearance

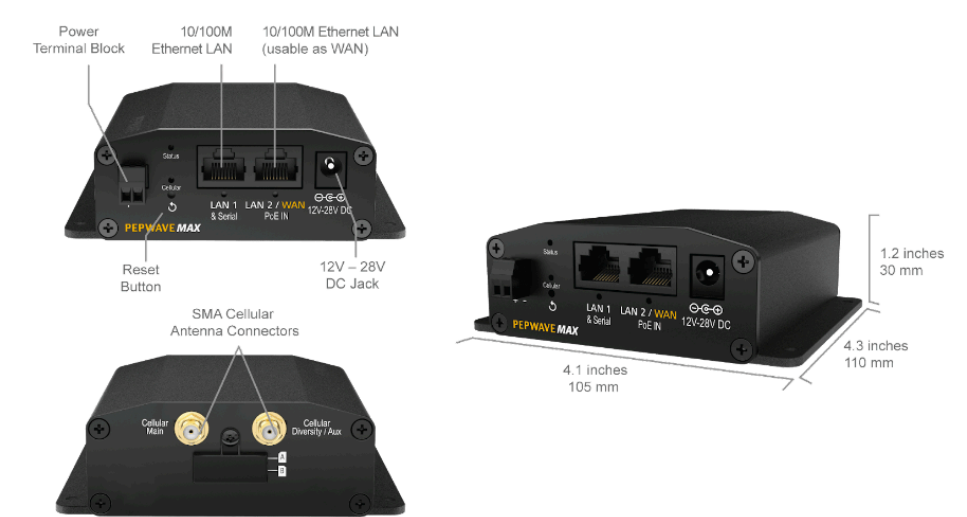


LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

MAX BR1 Mini M2M

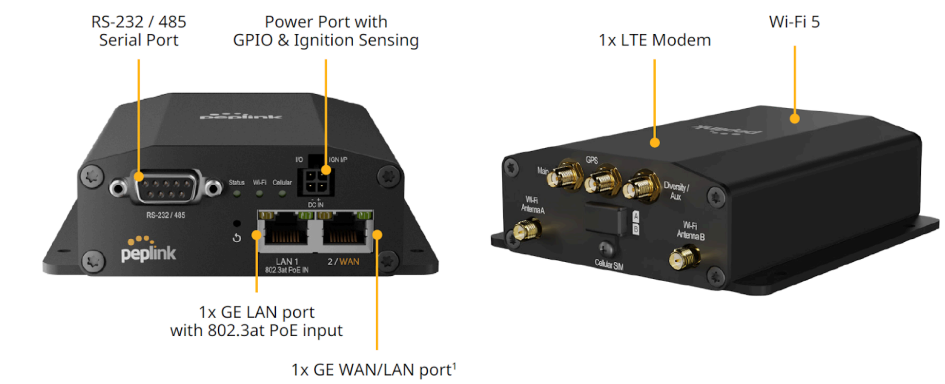

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| Wi-Fi Indicators | | |
|------------------|-----|----------------------|
| Wi-Fi | OFF | Wi-Fi AP is turn off |
| | ON | Wi-Fi AP is turn on |

MAX BR1 M2M

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------|-----------------------------------|
| Green LED | ON | 100 Mbps |
| | OFF | 10 Mbps |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |

MAX BR1 ENT

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 10 / 100 / 1000 Mbps |
| Orange LED | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 Pro

Panel Appearance

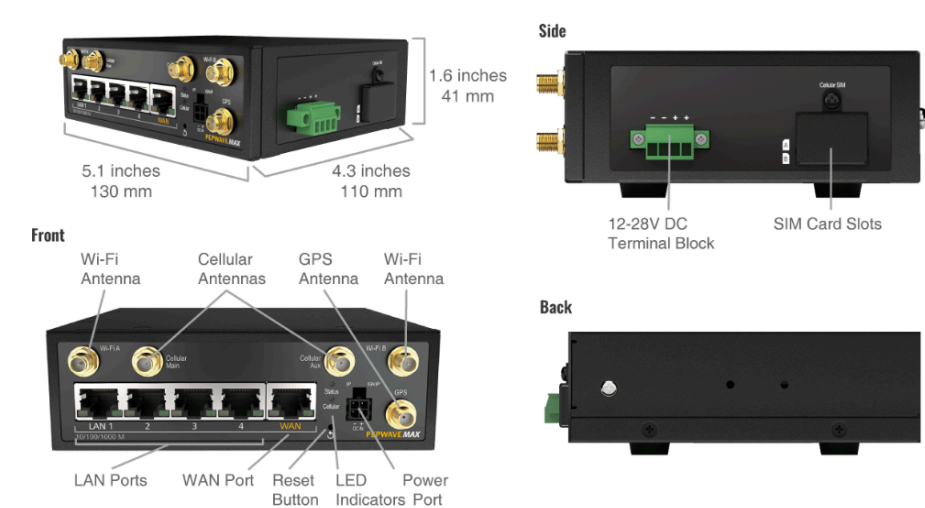

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| LAN and Ethernet WAN Ports | | |
|----------------------------|-----|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |

| | | |
|------------|----------------------|---|
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 Pro (CAT-20)

Panel Appearance



LED Indicators

The statuses indicated by the front panel LEDs are as follows:


| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| Cellular Indicators | | |
|---------------------|-----------------|----------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

| Wi-Fi Indicators | | |
|------------------|----------------------|---|
| Wi-Fi / Wi-Fi AP | OFF | Disabled intermittent |
| | ON | Connected to wireless network(s) |
| | | |
| LAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| WAN Port | | |
| Right LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Left LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 Pro 5G

Panel Appearance

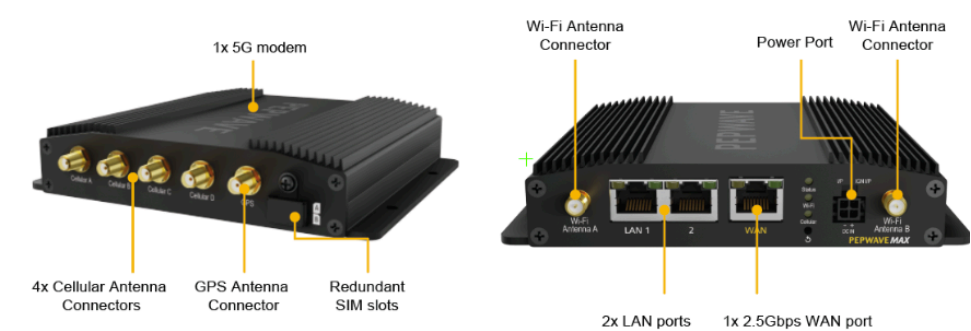

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|---------------------|----------------------|---|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |
| | | |
| Cellular Indicators | | |
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| | | |
| Wi-Fi Indicators | | |
| Wi-Fi / Wi-Fi AP | OFF | Disabled intermittent |
| | ON | Connected to wireless network(s) |
| | | |
| LAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| WAN Port | | |
| Right LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |

| | | |
|-----------|----------------------|---|
| Left LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR2 Pro

Panel Appearance



LED Indicators


The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|---------------------|-----------------|----------------------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |
| Cellular Indicators | | |
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |
| Wi-Fi Indicators | | |

| | | | |
|------------------|----------------------|---|----------------------------------|
| Wi-Fi / Wi-Fi AP | | OFF | Disabled intermittent |
| | | ON | Connected to wireless network(s) |
| | | | |
| LAN Ports | | | |
| Green LED | ON | 1000 Mbps | |
| | OFF | 10 Mbps / 100 Mbps or port is not connected | |
| Orange LED | ON | Port is connected without traffic | |
| | Blinking | Data is transferring | |
| | OFF | No data is being transferred or port is not connected | |
| Port Type | Auto MDI/MDI-X ports | | |
| | | | |
| WAN Port | | | |
| Right LED | ON | 1000 Mbps | |
| | OFF | 10 Mbps / 100 Mbps or port is not connected | |
| Left LED | ON | Port is connected without traffic | |
| | Blinking | Data is transferring | |
| | OFF | No data is being transferred or port is not connected | |
| Port Type | Auto MDI/MDI-X ports | | |

MAX Hotspot

Panel Appearance

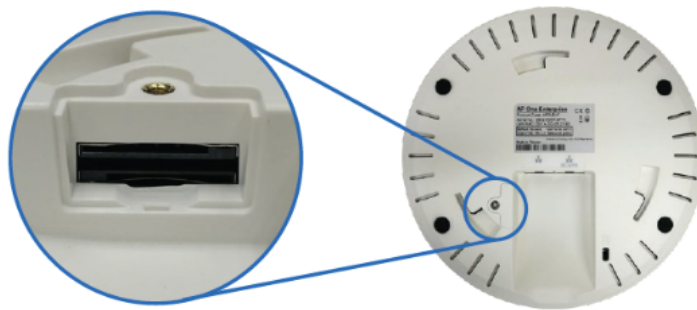

Screw Open the Panel to
Reveal Redundant SIM Slots

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |

MAX BR1 IP55

Panel Appearance




LED Indicators


The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 1000Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |


| Cellular Indicators | | |
|---------------------|--|--|
|---------------------|--|--|

| | | |
|---|----------|--|
| Cellular  | OFF | Disabled or no SIM card inserted |
| | Blinking | Connecting to network(s) in Standby Mode |
| | Green | Connected to network(s) in Priority 1 (Active) |

| LAN and WAN Indicators | | |
|---|-------|--|
|  | Green | Powered-on device connected to Ethernet port |
| | OFF | No device connected to Ethernet port |

MAX BR2 IP55

Panel Appearance

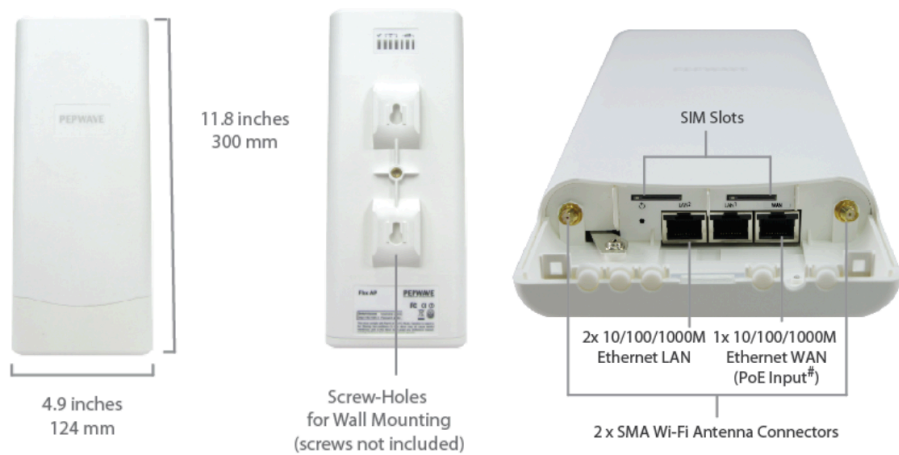

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators |
|-------------------|
|-------------------|

| | | |
|--------|--------------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking red | Boot up error |
| | Green | Ready |


| Wi-Fi Indicators | | |
|------------------|-----------------|--|
| Wi-Fi | OFF | Disabled Intermittent |
| | Blinking slowly | Connecting to wireless network(s) |
| | Blinking | Connected to wireless network(s) with traffic |
| | ON | Connected to wireless network(s) without traffic |

| Cellular Indicators | | |
|---------------------|-----|---------------------------------------|
| Cellular | OFF | Disabled or no SIM card inserted |
| | ON | Connecting or connected to network(s) |

| LAN and Ethernet WAN Ports | | |
|----------------------------|----------------------|---|
| Green LED | ON | 1000Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | Port is not connected |
| Port Type | Auto MDI/MDI-X ports | |


MAX BR1 IP67

Panel Appearance

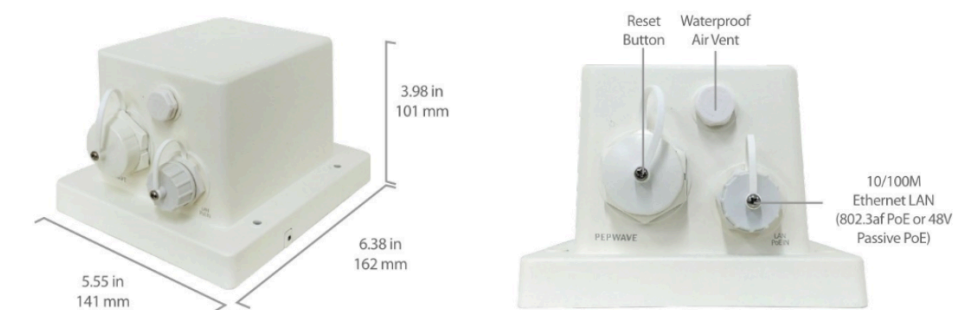

MAX On-The-Go

Panel Appearance

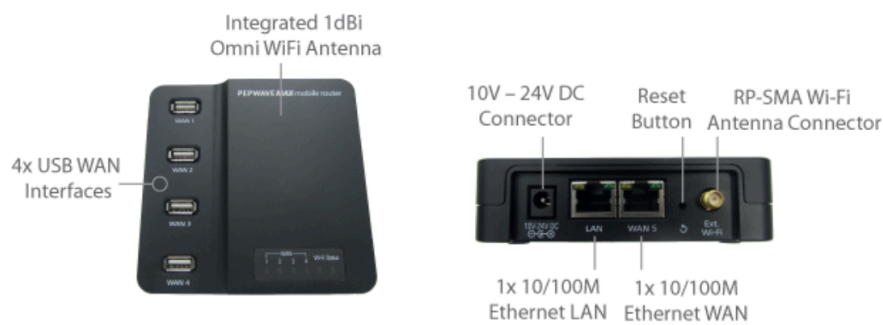

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Cellular Indicators | | |
|---------------------|-------|-----------------------------------|
| WAN | OFF | Modem is not attached to the port |
| | Green | Modem is attached to the port |
| Wi-Fi Indicators | | |
| Wi-Fi | OFF | Disconnected from AP |
| | Green | Connected to AP |
| Status Indicators | | |

| | | |
|--------|-------|---------------------|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Green | Ready |

| | | |
|----------------------------|----------------------|-----------------------------------|
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 100 Mbps |
| | OFF | 10 Mbps |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| Port Type | Auto MDI/MDI-X ports | |


SpeedFusion Engine

Panel Appearance



UBR LTE

Panel Appearance

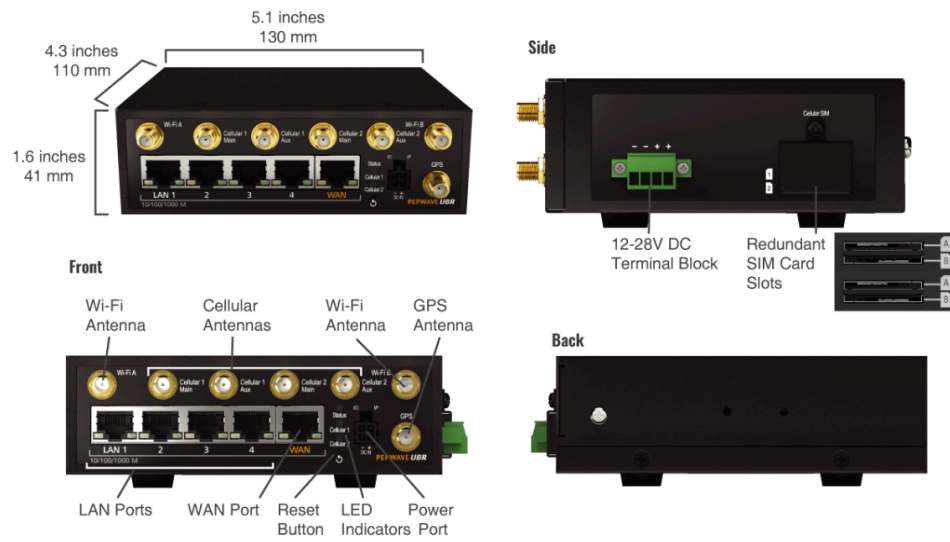

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|----------------------------|----------------------|---|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking Red | Boot up error |
| | Green | Ready |
| | | |
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| Cellular Indicators | | |
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

UBR Plus

Panel Appearance




LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|----------------------------|----------------------|---|
| Status | OFF | System initializing |
| | Red | Booting up or busy |
| | Blinking Red | Boot up error |
| | Green | Ready |
| | | |
| LAN and Ethernet WAN Ports | | |
| Green LED | ON | 1000 Mbps |
| | OFF | 10 Mbps / 100 Mbps or port is not connected |
| Orange LED | ON | Port is connected without traffic |
| | Blinking | Data is transferring |
| | OFF | No data is being transferred or port is not connected |
| Port Type | Auto MDI/MDI-X ports | |
| | | |
| Cellular Indicators | | |
| Cellular | OFF | Disabled or no SIM card inserted |
| | Blinking Slowly | Connecting to network(s) |
| | Green | Connected to network(s) |

PDX

Panel Appearance

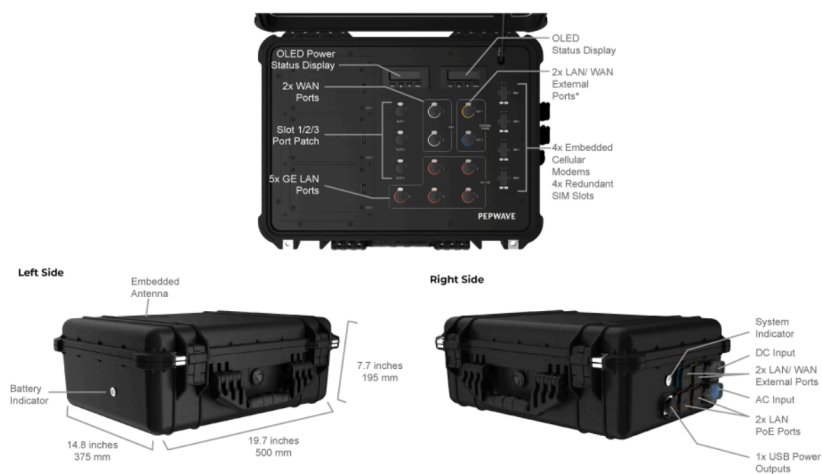

LED Indicators

The statuses indicated by the front panel LEDs are as follows:

| Status Indicators | | |
|-------------------|--------------|----------------------|
| Status | OFF | No battery installed |
| | Red | Charging |
| | Blinking red | Low Battery |
| | Green | Full Charged |

Ch3. Advanced Feature Summary

Drop-in Mode and LAN Bypass: Transparent Deployment
(<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/drop-in-mode-and-lan-bypass-transparent-deployment/>)

QoS: Clearer VoIP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/qos-clearer-voip/>)

Per-User Bandwidth Control (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/per-user-bandwidth-control/>)

High Availability via VRRP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/high-availability-via-vrrp/>)

USB Modem and Android Tethering (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/usb-modem-and-android-tethering/>)

Built-In Remote User VPN Support (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/built-in-remote-user-vpn-support/>)

SIM-card USSD support (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/sim-card-ussd-support/>)

KVM Virtualization (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/kvm-virtualization/>)

DPI Engine (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/dpi-engine/>)

NetFlow (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/netflow/>)

Wi-Fi Air Monitoring (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/wi-fi-air-monitoring/>)

SP Default Configuration (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/sp-default-configuration/>)

Peplink Relay (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/peplink-relay/>)

DNS over HTTPS (DoH) (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/dns-over-https-doh/>)

Peplink InTouch (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/peplink-intouch/>)

Synergy Mode (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/synergy-mode/>)

Virtual WAN on VLAN (<https://manual.peplink.com/documentation/pepwave-max-user-manual/advanced-feature-summary/virtual-wan-on-vlan/>)

Drop-in Mode and LAN Bypass: Transparent Deployment



As your organization grows, it may require more bandwidth, but modifying your network can be tedious. In **Drop-in Mode** (<http://www.peplink.com/knowledgebase/deploying-the-peplink-balance-in-drop-in-mode/>), you can conveniently install your Peplink router without making any changes to your network. For any reason your Peplink router loses power, the **LAN Bypass** (<http://www.peplink.com/knowledgebase/what-is-lan-bypass/>) will safely and automatically bypass the Peplink router to resume your original network connection.


Note: Drop-in mode is compatible for All MAX models except MAX BR1 IP67

QoS: Clearer VoIP



VoIP and videoconferencing are highly sensitive to latency. With QoS, Peplink routers can detect VoIP traffic and assign it the highest priority, giving you crystal-clear calls.

Per-User Bandwidth Control

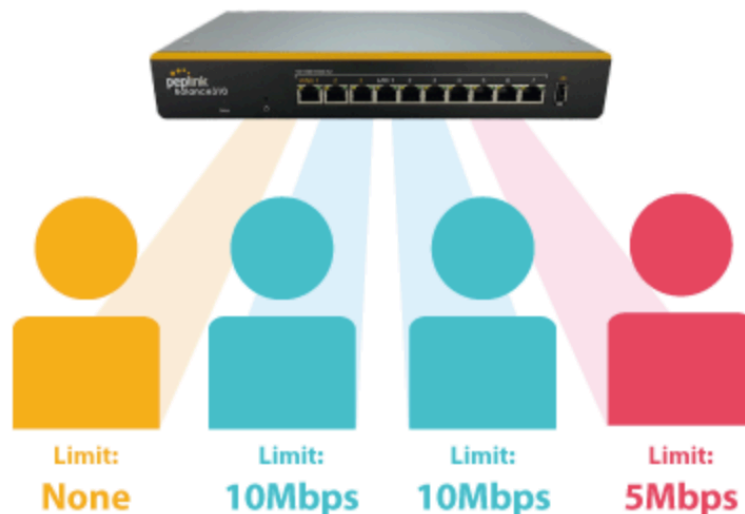

With per-user bandwidth control, you can define bandwidth control policies for up to 3 groups of users to prevent network congestion. Define groups by IP address and subnet, and set bandwidth limits for every user in the group.

High Availability via VRRP



When your organization has a corporate requirement demanding the highest availability with no single point of failure, you can deploy two Peplink routers in **High Availability mode** (<http://www.peplink.com/knowledgebase/configuring-11-backup-by-vrrp/>). With High Availability mode, the second device will take over when needed.

Compatible with: MAX 700, MAX HD2 (All variants), HD4 (All Variants)

USB Modem and Android Tethering



For increased WAN diversity, plug in a USB LTE modem as a backup. Peplink routers are compatible with over **200 modem types** (<http://www.peplink.com/technology/4g3g-modem-support/>). You can also tether to smartphones running Android 4.1.X and above.

Built-In Remote User VPN Support




Use OpenVPN or L2TP with IPsec to safely and conveniently connect remote clients to your private network. L2TP with IPsec is supported by most devices, but legacy devices can also connect using PPTP.

Click here for the full instructions on setting up L2TP with IPsec.

(<https://forum.peplink.com/t/setting-up-l2tp-with-ipsec/8046>) **Click here for the full instructions on setting up OpenVPN connections** (<https://forum.peplink.com/t/configure-remote-user-access-using-openvpn/19757>)


SIM-card USSD support

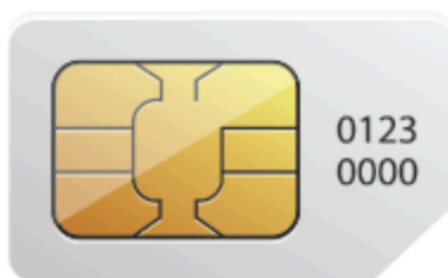

Cellular-enabled routers can now use USSD to check their SIM card's balance, process pre-paid cards, and configure carrier-specific services.

Click here for full instructions on using USSD (<http://www.peplink.com/knowledgebase/how-to-use-ussd-codes-on-cellular-enabled-routers/>)

KVM Virtualization

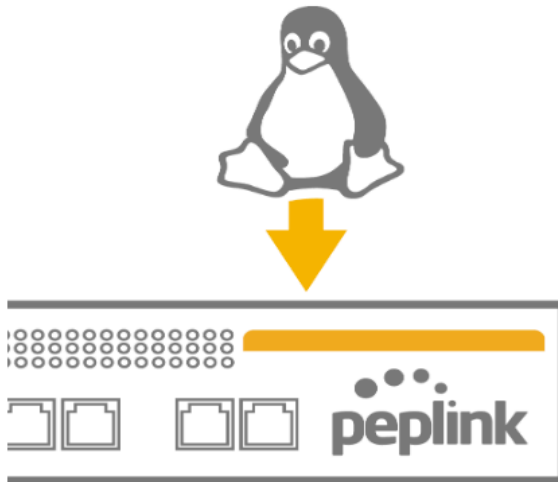

KVM is a virtualisation module that allows administrators using our routers to host a large range of virtual machines. KVM is now supported on some MediaFast / ContentHub routers.

Click here for the full instructions on how to set up KVM (<https://forum.peplink.com/t/how-to-install-a-virtual-machine-on-peplinkpepwave-mediafastcontenthub-routers/615d563606128ac0b42e68b7>)

Click here for the full instructions on how to set up KVM with USB Storage (<https://forum.peplink.com/t/how-to-install-virtual-machine-with-usb-storage-on-peplinkpepwave-mediafastcontenthub-routers/615d4a7e76a4d461fde5cc4c>)

DPI Engine

The DPI report written in the updated KB article will show further information on InControl2 through breaking down application categories into subcategories.

<https://forum.peplink.com/t/updated-ic2-deep-packet-inspection-dpi-reports-and-everything-you-need-to-know-about-it/29658> (<https://forum.peplink.com/t/updated-ic2-deep-packet-inspection-dpi-reports-and-everything-you-need-to-know-about-it/29658>)

NetFlow

NetFlow protocol is used to track network traffic. Tracking information from NetFlow can be sent to the NetFlow collector, which analyzes data and generates reports for review.

Note: To enable this feature, go to <https://<Device's IP>/cgi-bin/MANGA/support.cgi>

NetFlow

☒ Enable

Protocol: **NetFlow v5** ▼

Server IP Address: Port: Outgoing WAN: **Any** ▼

Server IP Address: Port: Outgoing WAN: **Any** ▼

Source Network Address: **Untagged LAN** ▼

Active Flow Timeout: minutes

Inactive Flow Timeout: seconds

Wi-Fi Air Monitoring

Peplink routers support Wi-Fi “Air Monitoring Mode” which is used to troubleshoot remotely and proactively monitor Wi-Fi and WAN performance. The report can be viewed under InControl 2 > Reports > AirProbe Reports after enabling Wi-Fi Air Monitoring.

Note: To enable this feature, go to <https://<Device's IP>/cgi-bin/MANGA/support.cgi>

• Wi-Fi Air Monitoring

☒ Enable

WARNING: Any supported Wi-Fi / AP features will cease to function when Wi-Fi Air Monitoring is turned on.

SP Default Configuration

The SP Default Configuration feature written in the updated KB article allows for the provisioning of custom made settings (a.k.a. InControl2 configuration) via the Ethernet LAN port and is ideal for those wanting to do a bulk deployment of many Peplink devices.

Note: If you would like to use this feature, please contact your purchase point (Eg.VAD).

Peplink Relay

Cloud Service Providers often restrict access to certain applications. With SFC Relay, you can route traffic before going out to the Internet, allowing access to previously restricted applications experienced with the public SpeedFusion Cloud nodes. Available as an add-on for your home router or as an upgradable license to your Peplink router, SFC Relay is sure to impress you and any peers you give access to.

<https://forum.peplink.com/t/configure-speedfusion-cloud-relay-server-and-client/6215ca9b017e48e0f3ff2479/> (<https://forum.peplink.com/t/configure-speedfusion-cloud-relay-server-and-client/6215ca9b017e48e0f3ff2479/>)

DNS over HTTPS (DoH)

DoH provides the benefits of communicating DNS information over a secure HTTPS connection in an encrypted manner. The protocol offers increased privacy and confidentiality by preventing data interception and man-in-the-middle attacks.

Peplink InTouch

InTouch is Peplink's zero-touch remote network management solution, leveraging InControl 2 and a SpeedFusion Connect (formerly known as SpeedFusion Cloud) data plan. This service extends a network administrator's ability to reach any device UI backed by a Peplink/Pepwave router. To configure InTouch, all you need is a valid InControl 2 subscription, a SpeedFusion Connect data plan, and a Peplink/Pepwave router (which requires the latest 8.2.0 firmware).

To watch a demonstration and read the FAQ, visit <https://www.peplink.com/enterprise-solutions/intouch/> (<https://www.peplink.com/enterprise-solutions/intouch/>)

Or learn to configure InTouch at <https://youtu.be/zg0iavHGkJw> (<https://youtu.be/zg0iavHGkJw>)

Synergy Mode

Synergy mode is a cascade multiple devices and combine the number of WANs to a single device virtually. All the WANs on the Synergized Device will appear as native WAN interfaces at the Synergy Controller and it can be managed like the built-in WAN interfaces.

[https://forum.peplink.com/t/synergy-mode-\(firmware-8.3.0\)/639be7d8af8c71a6f3050323/](https://forum.peplink.com/t/synergy-mode-(firmware-8.3.0)/639be7d8af8c71a6f3050323/)
([https://forum.peplink.com/t/synergy-mode-\(firmware-8.3.0\)/639be7d8af8c71a6f3050323/](https://forum.peplink.com/t/synergy-mode-(firmware-8.3.0)/639be7d8af8c71a6f3050323/))

Virtual WAN on VLAN

The Virtual WAN Activation License allows you to create 1 x virtual WAN on a particular VLAN, on either WAN or LAN interface. This means that you can create a virtual WAN on VLAN for a WAN port, or a virtual WAN on VLAN for a LAN port.

<https://forum.peplink.com/t/b20x-virtual-wan-activation-license-faq/6204bac7d90b9e6355e96e8d/1> (<https://forum.peplink.com/t/b20x-virtual-wan-activation-license-faq/6204bac7d90b9e6355e96e8d/1>)

Ch4. Installation

The following section details connecting Pepwave routers to your network.

Preparation

Before installing your Pepwave router, please prepare the following as appropriate for your installation:

- At least one Internet/WAN access account and/or Wi-Fi access information

- Depending on network connection type(s), one or more of the following:
 - **Ethernet WAN:** A 10/100/1000BaseT UTP cable with RJ45 connector
 - **USB:** A USB modem
 - **Embedded modem:** A SIM card for 5G/4G LTE service
 - **Wi-Fi WAN:** Wi-Fi antennas
 - **PC Card/Express Card WAN:** A PC Card/ExpressCard for the corresponding card slot
- A computer installed with the TCP/IP network protocol and a supported web browser. Supported browsers include Microsoft Internet Explorer 11 or above, Mozilla Firefox 24 or above, Apple Safari 7 or above, and Google Chrome 18 or above.

Constructing the Network

At a high level, construct the network according to the following steps:

1. With an Ethernet cable, connect a computer to one of the LAN ports on the Pepwave router. Repeat with different cables for up to 4 computers to be connected.
2. With another Ethernet cable or a USB modem/Wi-Fi antenna/PC Card/Express Card, connect to one of the WAN ports on the Pepwave router. Repeat the same procedure for other WAN ports.
3. Connect the power adapter to the power connector on the rear panel of the Pepwave router, and then plug it into a power outlet.

Configuring the Network Environment

To ensure that the Pepwave router works properly in the LAN environment and can access the Internet via WAN connections, please refer to the following setup procedures:

- LAN configuration

For basic configuration, refer to **Section**

(<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.4k668n3>)**8, Connecting to the Web Admin Interface.**

For advanced configuration, go to **Section**

(<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.3q5sasy>)**9, Configuring the LAN Interface(s).**

- WAN configuration

For basic configuration, refer to **Section**

(<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.4k668n3>)**8, Connecting to the Web Admin Interface.**

For advanced configuration, go to **Section**

(<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.4h042r0>)**9.2, Captive Portal**
(<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.4h042r0>).

Ch5. Mounting the Unit

Wall Mount (<https://manual.peplink.com/documentation/pepwave-max-user-manual/mounting-the-unit/wall-mount/>)

Car Mount (<https://manual.peplink.com/documentation/pepwave-max-user-manual/mounting->

the-unit/car-mount/)

IP67 Installation Guide (<https://manual.peplink.com/documentation/pepwave-max-user-manual/mounting-the-unit/ip67-installation-guide/>)

PDX Accessory Kit Installation Guide (<https://manual.peplink.com/documentation/pepwave-max-user-manual/mounting-the-unit/pdx-accessory-kit-installation-guide/>)

Wall Mount

The Pepwave MAX 700/HD2/On-The-Go can be wall mounted using screws. After adding the screw on the wall, slide the MAX in the screw hole socket as indicated below. Recommended screw specification: M3.5 x 20mm, head diameter 6mm, head thickness 2.4mm.

The Pepwave MAX BR1 requires four screws for wall mounting.

Car Mount

The Pepwave MAX700/HD2 can be mounted in a vehicle using the included mounting brackets. Place the mounting brackets by the two sides and screw them onto the device.




IP67 Installation Guide

Installation instructions for IP67 devices can be found here:

http://download.peplink.com/manual/IP67_Installation_Guide.pdf
(http://download.peplink.com/manual/IP67_Installation_Guide.pdf)

PDX Accessory Kit Installation Guide

Battery Set appearance

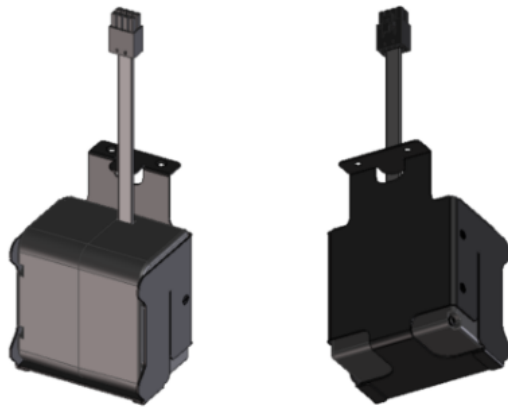


Step 1: Lock the battery set in the slot with 2 pcs M3 screws.



◦ Step 2: Plug power cable into the socket




◦ STEP 3: Lock the slot cover with 4 pcs M3 screws.

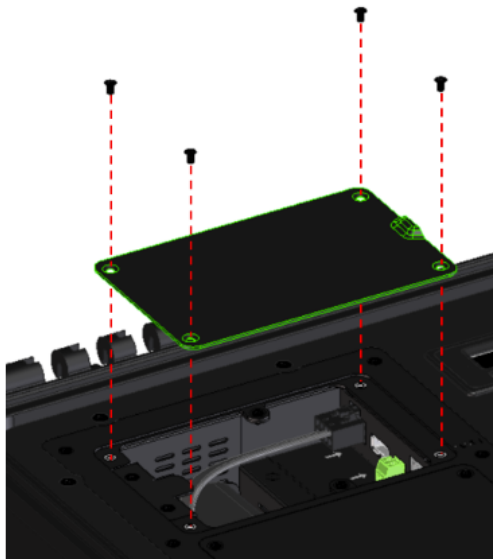

- **SFE-DUO Set appearance**




STEP 1: Assemble SMA cables to the device




GPS port not in use

- **STEP 2: Assemble bracket to the device**




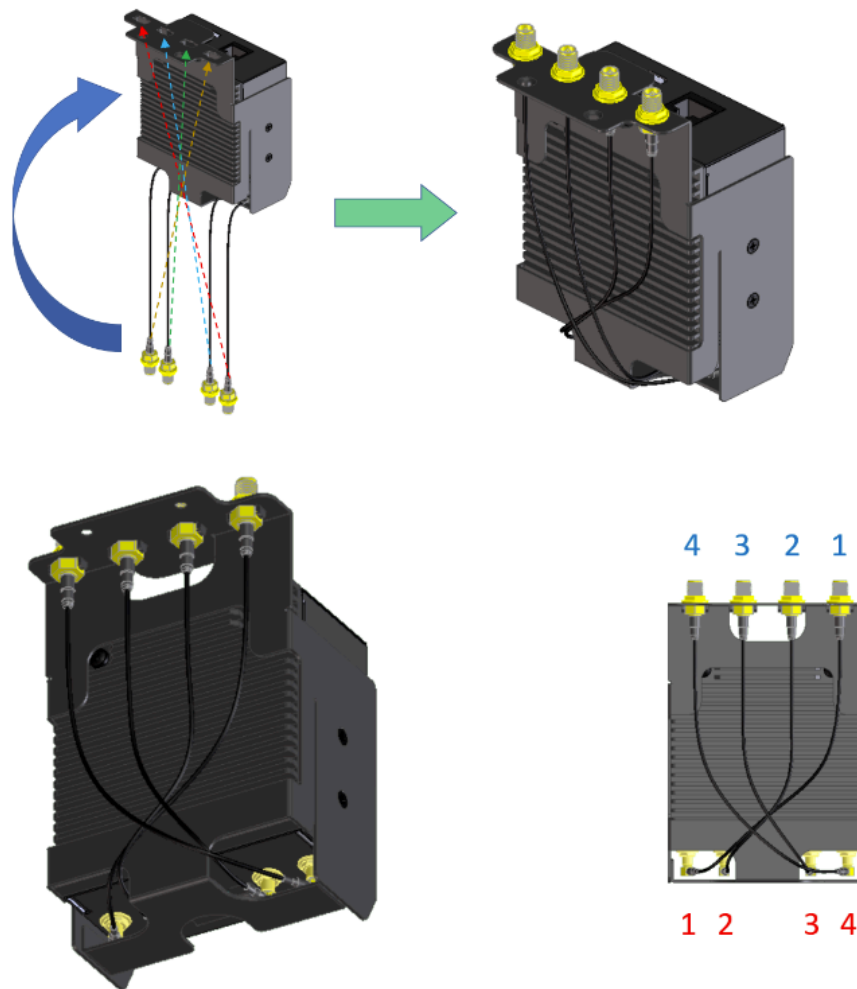


- STEP 4: Lock the SFE-Duo set in the slot with 2 pcs M3 screws.

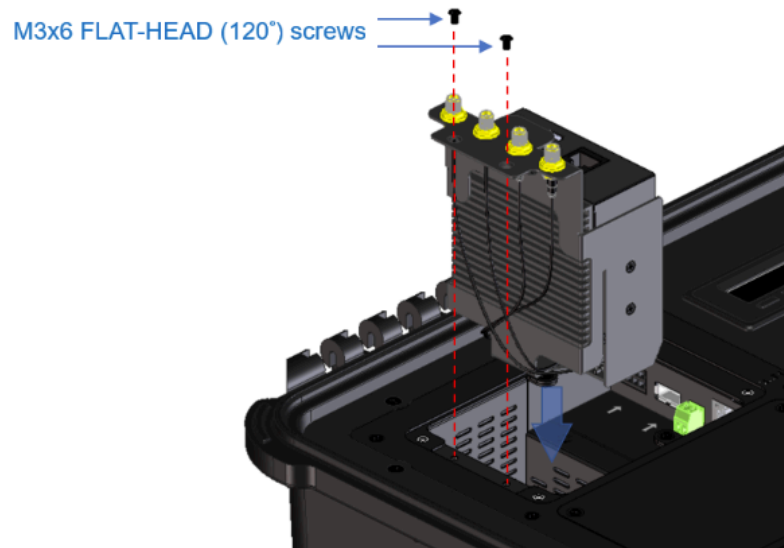

- STEP 5: Connect DC power & ETH port

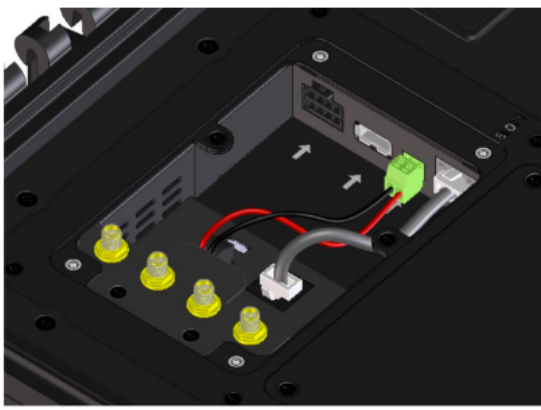

- STEP 6: Lock the slot cover with 4 pcs M3 screws.

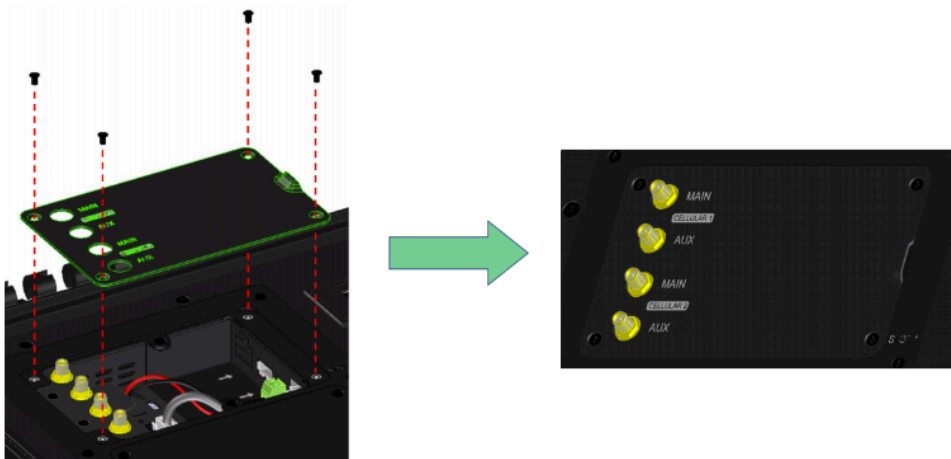


Ch6. Connecting to the Web Admin Interface

1. Start a web browser on a computer that is connected with the Pepwave router through the LAN.
2. To connect to the router's web admin interface, enter the following LAN IP address in the address field of the web browser: <http://192.168.50.1> (This is the default LAN IP address for Pepwave routers.)
3. Enter the following to access the web admin interface.

Username: admin

Password: admin

(This is the default username and password for Pepwave routers).

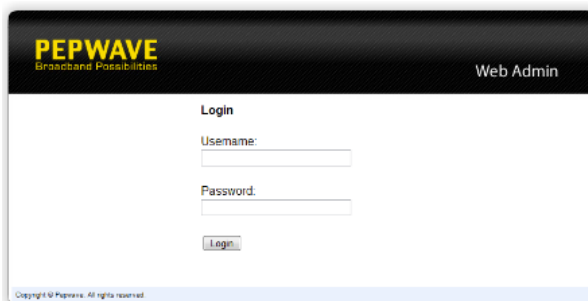

- You must change the default password on the first successful login.

- Password requirements are: A minimum of 10 lower AND upper case characters, including at least 1 number.
- When HTTP is selected, the URL will be redirected to HTTPS by default.

pepiLink Dashboard Setup Wizard Network AP System Status Apply Changes

You must change your default password now to proceed

Change Password

Current Password

New Password Require at least 10 characters, lower and upper case, with numbers.

Confirm New Password

Save and apply

After successful login, the **Dashboard** of the web admin interface will be displayed.

PEPWAVE Dashboard SpeedFusion Cloud Network Advanced AP System Status Apply Changes

WAN Connection Status

Priority 1 (Highest)

Wi-Fi WAN on 2.4 GHz ☒ Connected to Wireless Networks Details

Wi-Fi WAN on 5 GHz ☒ Connected to Wireless Networks Details

Priority 2

Drag desired (Priority 2) connections here

Disabled

WAN ☐ Disabled Details

Cellular ☐ Disabled Details

LAN Interface

Router IP Address: 192.168.50.1

Wi-Fi AP ☒ ON Details

PepVPN with SpeedFusion Status

Starting...

Established

Device Information

Model: Pepwave MAX BR1 MK2

Firmware: 8.2.0 build 5066

Uptime: 0 days 1 hour 9 minutes

CPU Load: 0%

Throughput: 120.0 kbps / 159.0 kbps

The **Dashboard** shows current WAN, LAN, and Wi-Fi AP statuses. Here, you can change WAN connection priority and switch on/off the Wi-Fi AP. For further information on setting up these connections, please refer to **Sections 8** (<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#bookmark=id.kgc8k>) and **9** (<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#bookmark=id.2afmg28>).

Device Information displays details about the device, including model name, firmware version, and uptime. For further information, please refer to **Section** (<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.21od6so>) **22** (<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#bookmark=id.3mj2wkv>).

Important Note

Configuration changes (e.g. WAN, LAN, admin settings, etc.) will take effect only after clicking the **Save** button at the bottom of each page. The **Apply Changes** button causes the changes to be saved and applied.

Ch7. SpeedFusion Connect Protect

With Pepwave products, your device is able to connect to SpeedFusion Connect Protect without the use of a second endpoint. This service has wide access to a number of SpeedFusion endpoints hosted from around the world, providing your device with unbreakable connectivity wherever you are.*




*SpeedFusion Connect Protect is supported in firmware version 8.1.0 and above. SpeedFusion Connect is a subscription basis. SpeedFusion Connect Protect license can be purchased at <https://estore.peplink.com/> (<https://estore.peplink.com/>) > **SpeedFusion Service** > **SpeedFusion Connect Protect**.

Activate SpeedFusion Connect Service

All Care plans now come with SpeedFusion Connect Protect included. This data allowance will automatically begin and end in accordance with your warranty. No activation is required.

Enable SpeedFusion Connect Protect


Access the Web Admin of the device you want to create as the Peplink Relay Server, navigating to the **"SFC Protect"** tab.

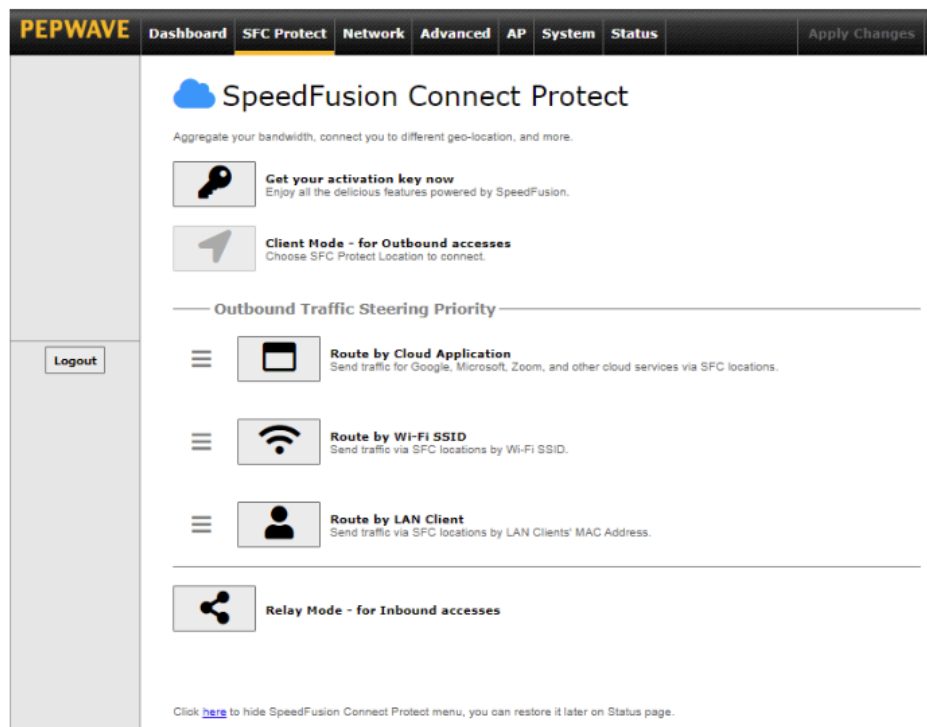

To setup a Peplink Relay Mode, select “**Relay Mode – for Inbound accesses**” > Choose the **SFC Protect Location** you wish to connect to > Click on the **Green tick button** to confirm the change.




The Relay Sharing Code will be generated, and other peers can use this code to establish a SpeedFusion Connect Protect that will forward the traffics to this device, allowing them to access local networks and the internet via your WAN connection.

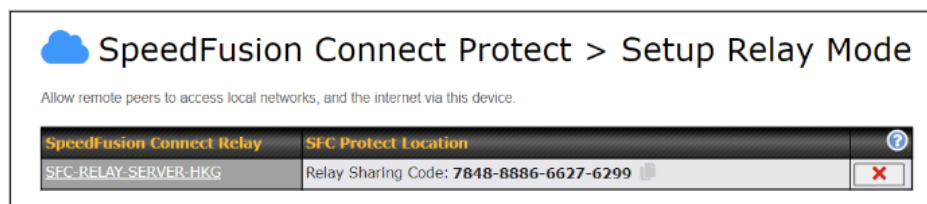

To connect to SpeedFusion Connect Protect, you can select a **SFC Protect Location** of your choice, or simply and **Automatic** then the device will establish connection to the nearest SFC Protect server.

Choose **Automatic** > Click on the **green tick button** to confirm the change.

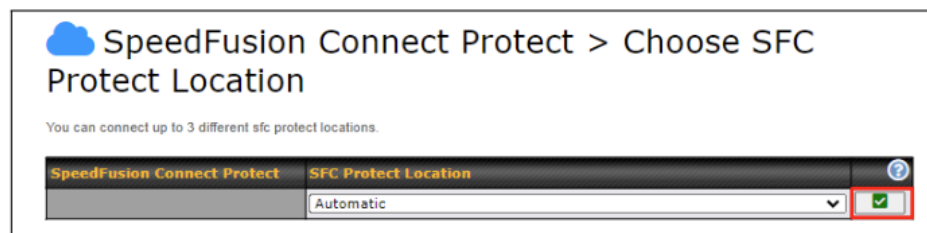

Or you may select **Home Sharing** and use your **Relay Sharing Code** to create a profile if you have set up a Peplink Relay Client on another device.

SpeedFusion Connect Protect Profile

| | |
|----------------------|-------------------------------------|
| Enable | <input checked="" type="checkbox"/> |
| SFC Protect Location | Automatic |

1 2 - WAN Smoo... + ←

Tunnel Options

| | | |
|--------------------------|---|--------|
| Local / Remote Tunnel ID | 2 | |
| Tunnel Name | WAN Smoothing | |
| Data Port | <input checked="" type="radio"/> Auto <input type="radio"/> Custom | |
| Bandwidth Limit | <input type="checkbox"/> | |
| TCP Ramp Up | <input type="checkbox"/> | |
| WAN Smoothing | Overall Redundancy Level | Normal |
| | Maximum Level on the Same Link | Normal |
| Forward Error Correction | Off | |
| Receive Buffer | 0 ms | |
| Packet Fragmentation | <input checked="" type="radio"/> Always <input type="radio"/> Use DF Flag | |

Click on **Save** and **Apply Changes** to save the configuration. Now, the router has 2 Speedfusion tunnels to the SpeedFusion Connect Protect.

Wi-Fi AP ON **Status**

No Wi-Fi AP

SpeedFusion Connect Protect

| | |
|-------------------------|--|
| SFC (1) | Established |
| SFC (2 - WAN Smoothing) | Established |

Data usage allowance:

Create an outbound policy to steer the internet traffic to go into SFC Protect. Please go to **Advanced > Outbound Policy**, click on **Add Rule** to create a new outbound policy.

PEPWAVE Dashboard SFC Protect Network **Advanced** AP System Status Apply Changes

Advanced

- SpeedFusion VPN
- IPsec VPN
- GRE Tunnel
- OpenVPN
- Outbound Policy**
- Port Forwarding

NAT Mappings

QoS

- User Groups
- Bandwidth Control
- Application Queue
- Application

Firewall

- Access Rules
- Content Blocking

Routing Protocols

- OSPF & RIPv2
- BGP

Remote User Access

Add a New Custom Rule

| | | |
|---|--|---------------------------|
| Service Name | | |
| Enable | <input checked="" type="checkbox"/> | |
| Source | Any | |
| Destination | IP Network | Mask: 255.255.255.0 (/24) |
| Protocol | Any | |
| Algorithm | Priority | |
| Priority Order | Highest Priority | |
| | SFC Protect: SFC | |
| | WAN: WAN | |
| | WAN: Cellular | |
| | WAN: Wi-Fi WAN on 2.4 GHz | |
| | WAN: Wi-Fi WAN on 5 GHz | |
| Lowest Priority | | |
| When No Connections are Available | Drop the Traffic | |
| Terminate Sessions on Connection Recovery | <input type="checkbox"/> Enable | |

Save Cancel

Outbound Policy

Custom +

Rules
?
Drag and drop rows by the left to change rule order


| Service | Algorithm | Source | Destination | Protocol / Port | |
|------------------------------------|----------------------------------|-----------------------------|-------------|-----------------|---|
| PepVPN / OSPF / BGP / RIPv2 Routes | | | | | |
| SpeedFusion Cloud Routes | | | | | |
| to internet | Priority VPN: SFC (1 - Def... | IP Address 192.168.50.10 | Any | Any | ✖ |
| HTTPS Persistence | Persistence (Src) (Auto) | Any | Any | TCP 443 | ✖ |
| Default | (Auto) | | | | |
| Add Rule | | | | | |

Expert Mode
?


Enabled
✎

Route by Cloud Application


Optimize Cloud Application allows you to route Internet traffic through SpeedFusion Connect Protect based on the application. Go to **SFC Protect > Route by Cloud Application**.



SpeedFusion Connect Protect


Aggregate your bandwidth, connect you to different geo-location, and more.



Client Mode - for Outbound accesses
Choose SFC Protect Location to connect.

Outbound Traffic Steering Priority


Route by Cloud Application
Send traffic for Google, Microsoft, Zoom, and other cloud services via SFC locations.

Select a Cloud application to route through SpeedFusion Connect Protect from the drop down list > Click  > Save > Apply Changes.

Click the  to remove a selected Cloud application from routing through SpeedFusion Connect Protect.


SpeedFusion Connect Protect > Optimize Cloud Application


Traffic of the selected cloud application will be redirected to the assigned SFC protect.

Automatic


| | | |
|-------------------------|--|---|
| SFC (1) | Cloud Application | |
| | --- | + |
| SFC (2 - WAN Smoothing) | Google Workspace | |
| | Zoom | |
| | Lifesize | |
| | Slack | |
| | Dropbox | |
| | Microsoft Services | |
| | Microsoft Office 365 | |
| | Exchange Online | |
| | SharePoint and OneDrive | |
| | Skyline for Business and Microsoft Teams | |

Route by Wi-Fi SSID

SpeedFusion Connect Protect provides a convenient way to route the Wi-Fi client to the cloud from **SFC Protect > Route by Wi-Fi SSID**.

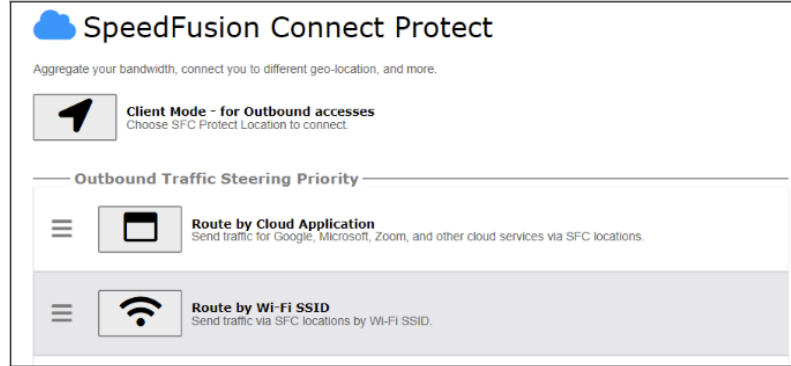

Create a new SSID for SFC Protect. The new SSID will inherit all settings from one of the existing SSIDs including the Security Policy. Then click **Save** followed by **Apply Changes**.

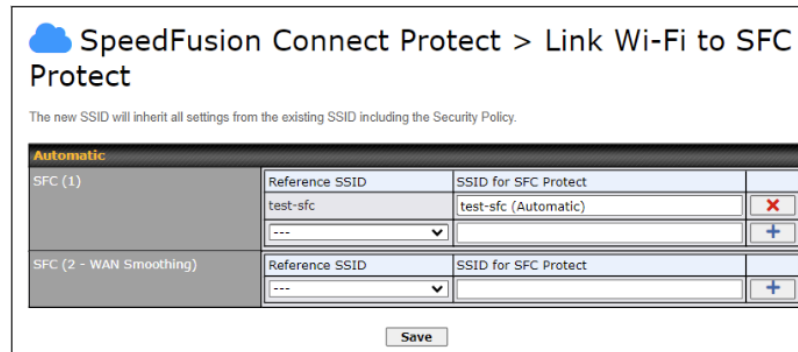


SFC Protect SSID will be shown on **Dashboard**.




Route by LAN Client

SpeedFusion Connect Protect provides a convenient way to route the LAN client to the cloud from **SFC Protect > Route by LAN Client**.

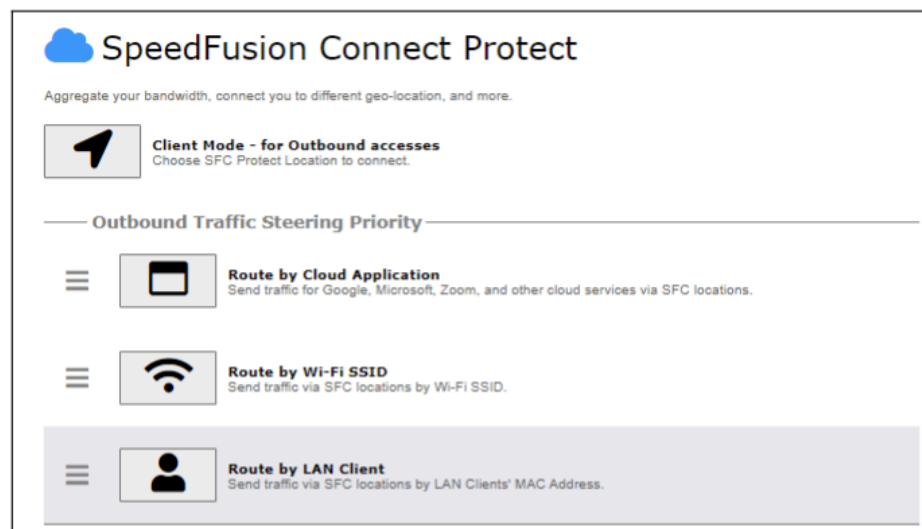

Choose a client from the drop down list > Click + > Save > Apply Changes.

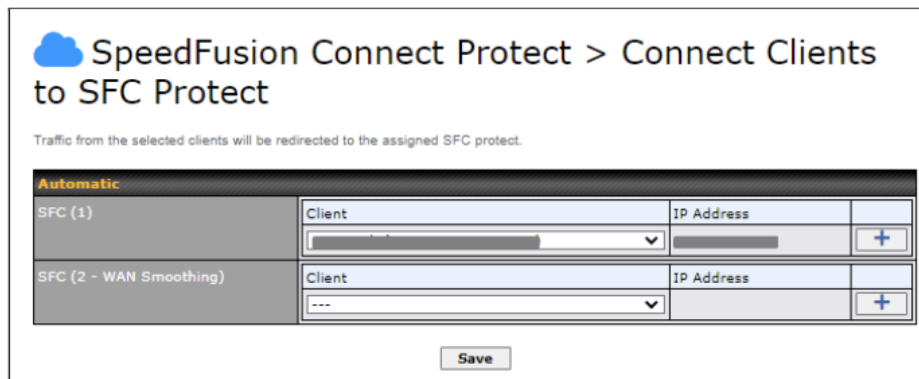

The interface shows a title bar with a cloud icon and the text "SpeedFusion Connect Protect > Connect Clients to SFC Protect". Below the title bar is a note: "Traffic from the selected clients will be redirected to the assigned SFC protect." The main content area is titled "Automatic" and contains a table with two rows. The first row is for "SFC (1)" and the second row is for "SFC (2 - WAN Smoothing)". Each row has a "Client" column with a dropdown menu, an "IP Address" column with a text input field, and a "+" button. Below the table is a "Save" button.

| Automatic | | |
|-------------------------|----------------------|----------------------|
| SFC (1) | Client | IP Address |
| | <input type="text"/> | <input type="text"/> |
| SFC (2 - WAN Smoothing) | Client | IP Address |
| | <input type="text"/> | <input type="text"/> |

Save

Ch8. Configuring the LAN Interface(s)

Basic Settings (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-8-configuring-the-lan-interfaces/basic-settings/>)

Port Settings (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-8-configuring-the-lan-interfaces/port-settings/>)

Captive Portal (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-8-configuring-the-lan-interfaces/captive-portal/>)

Basic Settings

LAN interface settings are located at **Network > LAN > Network Settings**. Navigating to that page will show the following dashboard:

| LAN | VLAN | Network | |
|---------|------|-----------------|---|
| LAN | None | 172.16.251.1/24 | |
| VLAN1 | 1 | 2.2.2.2/24 | ✕ |
| VLAN2 | 2 | 3.3.3.3/24 | ✕ |
| New LAN | | | |

This represents the LAN interfaces that are active on your router (including VLAN). A gray "X" means that the VLAN is used in other settings and cannot be deleted. You can find which settings are using the VLAN by hovering over the gray "X".

Alternatively, a red "X" means that there are no settings using the VLAN. You can delete that VLAN by clicking the red "X"

Clicking on any of the existing LAN interfaces (or creating a new one) will show the following :



The interface shows a title bar with the text "IP Settings". Below the title bar is a table with two columns: "IP Address" and "Subnet Mask". The "IP Address" column contains a text input field with the value "255.255.255.0 (/24)". The "Subnet Mask" column contains a dropdown menu with the value "255.255.255.0 (/24)".

| IP Settings | |
|-------------|---------------------|
| IP Address | 255.255.255.0 (/24) |

IP Settings

IP Address The IP address and subnet mask of the Pepwave router on the LAN.

| Network Settings | |
|--------------------|-------------------------------------|
| Name | <input type="text"/> |
| VLAN ID | <input type="text"/> |
| Inter-VLAN routing | <input checked="" type="checkbox"/> |

Network Settings

Name Enter a name for the LAN.

VLAN ID Enter a number for your VLAN.

Inter-VLAN routing Check this box to enable routing between virtual LANs.

| Layer 2 SpeedFusion VPN Bridging | |
|---|---|
| SpeedFusion VPN Profiles to Bridge | No profile is available |
| Spanning Tree Protocol | <input type="checkbox"/> |
| DHCP Option 82 Injection | <input checked="" type="checkbox"/> |
| Override IP Address when bridge connected | <input checked="" type="radio"/> Do not override <input type="radio"/> Static <input type="radio"/> By DHCP <input type="radio"/> As None |

Help Close

If you want to enable DHCP Option 82 Injection, please click [here](#).

This allow the device to inject Option 82 with Device Name information before forwarding the DHCP Request packet to SpeedFusion VPN peer, such that the DHCP Server can identify where does this request come from.

Layer 2 SpeedFusion VPN Bridging

SpeedFusion VPN Profiles to Bridge The remote network of the selected SpeedFusion VPN profiles will be bridged with this local LAN, creating a Layer 2 SpeedFusion VPN, they will be connected and operate like a single LAN, and any broadcast or multicast packets will be sent over the VPN.

Spanning Tree Protocol Click the box will enable STP for this layer 2 profile bridge.

DHCP Option 82 Click on the question Mark if you want to enable DHCP Option 82.




This allows the device to inject Option 82 with Router Name information before forwarding the DHCP Request packet to a SpeedFusion VPN peer, such that the DHCP Server can identify where the request originates from.


Override IP Address when bridge connected Select "Do not override" if the LAN IP address and local DHCP server should remain unchanged after the Layer 2 SpeedFusion VPN is up.




If you choose to override the IP address when the VPN is connected, the device will not act as a router, and most Layer 3 routing functions will cease to work.

| DHCP Server | | | | | | | | | | | |
|-------------------------|--|-----------------------|---|--------|-------------|-------------------------|--|----------------------|-------------------|----------------------|---|
| DHCP Server | <input checked="" type="checkbox"/> Enable | | | | | | | | | | |
| DHCP Server Logging | <input type="checkbox"/> | | | | | | | | | | |
| IP Range | <input type="text"/> - <input type="text"/> | 255.255.255.0 (/24) ▼ | | | | | | | | | |
| Lease Time | 1 Days 0 Hours 0 Mins | | | | | | | | | | |
| DNS Servers | <input checked="" type="checkbox"/> Assign DNS server automatically | | | | | | | | | | |
| BOOTP | <input type="checkbox"/> | | | | | | | | | | |
| Extended DHCP Option | <table border="1" style="width: 100%;"> <thead> <tr> <th>Option</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">No Extended DHCP Option</td> </tr> <tr> <td colspan="2" style="text-align: center;">Add</td> </tr> </tbody> </table> | | | Option | Value | No Extended DHCP Option | | Add | | | |
| Option | Value | | | | | | | | | | |
| No Extended DHCP Option | | | | | | | | | | | |
| Add | | | | | | | | | | | |
| DHCP Reservation | <table border="1" style="width: 100%;"> <thead> <tr> <th>Name</th> <th>MAC Address</th> <th>Static IP</th> <th></th> </tr> </thead> <tbody> <tr> <td><input type="text"/></td> <td>00:00:00:00:00:00</td> <td><input type="text"/></td> <td style="text-align: center;">+</td> </tr> </tbody> </table> | | | Name | MAC Address | Static IP | | <input type="text"/> | 00:00:00:00:00:00 | <input type="text"/> | + |
| Name | MAC Address | Static IP | | | | | | | | | |
| <input type="text"/> | 00:00:00:00:00:00 | <input type="text"/> | + | | | | | | | | |


DHCP Server Settings

| | |
|-----------------------------|---|
| DHCP Server | <p>When this setting is enabled, the Pepwave router's DHCP server automatically assigns an IP address to each computer connected via LAN and configured to obtain an IP address via DHCP. The Pepwave router's DHCP server can prevent address collisions on the LAN.</p> <p>To enable DHCP bridge relay, please click the  icon on this menu item.</p> |
| DHCP Server Logging | Enable logging of DHCP events in the eventlog by selecting the checkbox. |
| IP Range | These settings allocate a range of IP addresses that will be assigned to LAN computers by the Pepwave router's DHCP server. |
| Lease Time | This setting specifies the length of time throughout which an IP address of a DHCP client remains valid. Upon expiration of Lease Time , the assigned IP address will no longer be valid and the IP address assignment must be renewed. |
| DNS Servers | This option allows you to input the DNS server addresses to be offered to DHCP clients. If Assign DNS server automatically is selected, the Pepwave router's built-in DNS server address (i.e., LAN IP address) will be offered. |
| BOOTP | Check this box to enable BOOTP on older networks that still require it. |
| Extended DHCP Option | In addition to standard DHCP options (e.g. DNS server address, gateway address, subnet mask), you can specify values for additional extended DHCP options, as defined in RFC 2132. With these extended options enabled, you can pass additional configuration information to LAN hosts. To define an extended DHCP option, click the Add button, choose an option to define, and then enter its value. For values that are in IP address list format, you can enter one IP address per line in the provided text area input control. Each option can be defined once only. |
| DHCP Reservation | <p>This setting reserves the assignment of fixed IP addresses for a list of computers on the LAN. The computers to be assigned fixed IP addresses on the LAN are identified by their MAC addresses. The fixed IP address assignment is displayed as a cross-reference list between the computers' names, MAC addresses, and fixed IP addresses.</p> <p>Name (an optional field) allows you to specify a name to represent the device. MAC addresses should be in the format 00:AA:BB:CC:DD:EE. Press  to create a new record. Press  to remove a record. Reserved clients information can be imported from the Client List, located at Status>Client List. For more details, please refer to Section 3.1.1 (https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=h.u).</p> |

To configure DHCP relay, first click the  button found next to the **DHCP Server** option to display the settings.


| DHCP Relay Settings | |
|------------------------|--|
| DHCP Relay |  <input checked="" type="checkbox"/> Enable |
| DHCP Server IP Address |  DHCP Server 1: <input type="text"/> DHCP Server 2: <input type="text"/> |
| DHCP Option 82 |  <input type="checkbox"/> |
| DHCP Relay Logging | <input type="checkbox"/> |

DHCP Relay Settings



| | |
|-------------------------------|--|
| Enable | Check this box to turn on DHCP relay. Click the  icon to disable DHCP relay. |
| DHCP Server IP Address | Enter the IP addresses of one or two DHCP servers in the provided fields. The DHCP servers entered here will receive relayed DHCP requests from the LAN. For active-passive DHCP server configurations, enter active and passive DHCP server relay IP addresses in DHCP Server 1 and DHCP Server 2 . |


| | |
|---------------------------|--|
| DHCP Option 82 | DHCP Option 82 includes device information as relay agent for the attached client when forwarding DHCP requests from client to server. This option also embeds the device's MAC address and network name in circuit and remote IDs. Check this box to enable DHCP Option 82. |
| DHCP Relay Logging | Enable logging of DHCP Relay events in the eventlog by selecting the checkbox. |

Once DHCP is set up, configure **LAN Physical Settings**, **Static Route Settings**, and **DNS Proxy Settings** as noted above.



Static Route Settings

| | |
|---------------------|--|
| Static Route | <p>This table is for defining static routing rules for the LAN segment. A static route consists of the network address, subnet mask, and gateway address. The address and subnet mask values are in <i>w.x.y.z</i> format.</p> <p>The local LAN subnet and subnets behind the LAN will be advertised to the VPN. Remote routes sent over the VPN will also be accepted. Any VPN member will be able to route to the local subnets. Press  to create a new route. Press  to remove a route.</p> |
|---------------------|--|

A – Advanced feature, please click the  button on the top right hand corner of the Static Route section to activate and configure Virtual Network Mapping to resolve network address conflict with remote peers.



In case of a network address conflict with remote peers (i.e. SpeedFusion VPN / IPsec VPN / IP Forwarding WAN are considered as remote connections), you can define Virtual Network Mapping to resolve it.

Note: OSPF & RIPv2 settings should be updated as well to avoid advertising conflicted networks.

For further details on virtual network mapping watch this video:

<https://youtu.be/C1FMdZCn3Z8> (<https://youtu.be/C1FMdZCn3Z8>)

Virtual Network Mapping

| | |
|-----------------------|---|
| One-to-One NAT | <p>Every IP Address in the Local Network has a corresponding unique Virtual IP Address for NAT.</p> <p>Traffic originating from the Local Network to remote connections will be SNAT'ed and behave like coming from the defined Virtual Network.</p> <p>While traffic initiated by remote peers to the Virtual Network will be DNAT'ed accordingly.</p> |
|-----------------------|---|

Many-to-One NAT The subnet range defined in Local Network will be mapped to a single Virtual IP Address for NAT. Traffic can only be initiated from local to remote, and these traffic will be NAT'ed and behaves like coming from the same Virtual IP Address.

DNS Proxy Settings

Enable

☒

DNS Caching

?

☐

Include Google Public DNS Servers

?

☐

Local DNS Records

?

| Host Name | IP Address | TTL | |
|-----------|------------|------|---|
| | | 3600 | + |

Domain Lookup Policy

?

| Domain | Connection | |
|--------|------------|---|
| | | + |

DNS Resolvers

?

| | |
|---|--------------|
| <input type="checkbox"/> WAN | 192.168.52.1 |
| <input type="checkbox"/> Cellular | |
| <input type="checkbox"/> Wi-Fi WAN on 2.4 GHz | |
| <input type="checkbox"/> Wi-Fi WAN on 5 GHz | |
| <input type="checkbox"/> SFC | |
| <input type="checkbox"/> Untagged LAN | |

Preferred connections are shown with ☒



Save

DNS Proxy Settings

Enable To enable the DNS proxy feature, check this box, and then set up the feature at **Network > LAN > DNS Proxy Settings**. A DNS proxy server can be enabled to serve DNS requests originating from LAN/PPTP/SpeedFusion™ peers. Requests are forwarded to the **DNS servers/resolvers** defined for each WAN connection.

DNS Caching This field is to enable DNS caching on the built-in DNS proxy server. When the option is enabled, queried DNS replies will be cached until the records' TTL has been reached. This feature can help improve DNS lookup time. However, it cannot return the most up-to-date result for those frequently updated DNS records. By default, **DNS Caching** is disabled.

Include Google Public DNS Servers When this option is **enabled**, the DNS proxy server will also forward DNS requests to Google's Public DNS Servers (<https://developers.google.com/speed/public-dns/>), in addition to the DNS servers defined in each WAN. This could increase the DNS service's availability. This setting is disabled by default.

Local DNS Records This table is for defining custom local DNS records. A static local DNS record consists of a host name and IP address. When looking up the host name from the LAN to LAN IP of the Pepwave router, the corresponding IP address will be returned. Press  to create a new record. Press  to remove a record.

Domain Lookup Policy DNS Proxy will lookup the domain names defined in this table using the specified connections only.

DNS Resolvers A This field specifies which DNS servers can receive forwarded DNS requests. If no DNS server is selected, then all of them will be selected by default.

If you wish to select a SpeedFusion VPN peer, enter the IP address(es) of the VPN peer's DNS server.



Incoming queries will be forwarded to one of the selected servers. If none of the selected servers can be reached, then the router will forward incoming queries to all servers with healthy WAN connections.

A – Advanced feature, please click the  button on the top right hand corner to activate.

Finally, if needed, configure Bonjour forwarding, Apple's zero configuration networking protocol. Once VLAN configuration is complete, click **Save** to store your changes.




Bonjour Forwarding Settings

- Enable** Check this box to turn on Bonjour forwarding.
- Bonjour Service** Choose **Service** and **Client** networks from the drop-down menus, and then click  to add the networks. To delete an existing Bonjour listing, click .

Drop-In Mode

Drop-in mode (or transparent bridging mode) eases the installation of the Pepwave MAX on a live network between the firewall and router, such that changes to the settings of existing equipment are not required.

The following diagram illustrates drop-in mode setup:

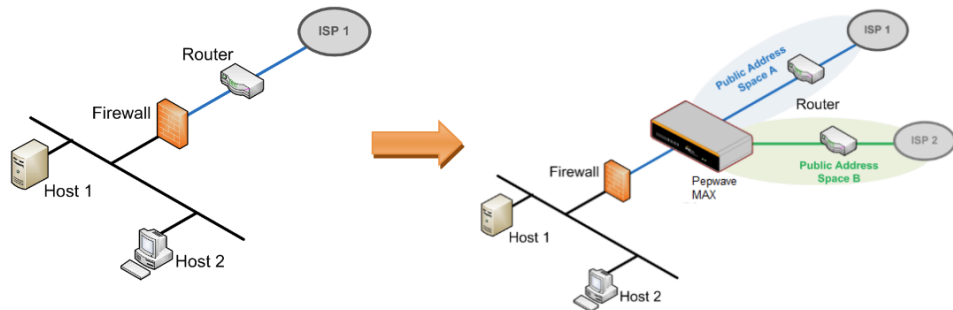

Check the box Enable to enable the Drop-in Mode. After enabling this feature and selecting the WAN for Drop-in mode, various settings including the WAN's connection method and IP address will be automatically updated.

When drop-in mode is enabled, the LAN and the WAN for drop-in mode ports will be bridged. Traffic between the LAN hosts and WAN router will be forwarded between the devices. In this case, the hosts on both sides will not notice any IP or MAC address changes.

After successfully setting up the Pepwave MAX as part of the network using drop-in mode, it will, depending on model, support one or more WAN connections. Some MAX units also support multiple WAN connections after activating drop-in mode, though a SpeedFusion license may be required to activate more than one WAN port.

Please note the Drop-In Mode is mutually exclusive with VLAN.

Drop-In Mode Settings

Enable

☒

WAN for Drop-In Mode

WAN

☒ Apply NAT on VLAN networks outgoing Internet traffic
VLAN network(s) may route their outgoing Internet traffic to this unit. When this checkbox is checked their traffic will be NAT'd before forwarding out of this WAN. Leave this checkbox checked if you are not sure.

Share Drop-In IP

☒

Shared IP Address

255.255.255.0 (/24)

Static Route

| Destination Network | Subnet Mask |
|---------------------|---------------------|
| | 255.255.255.0 (/24) |

WAN Default Gateway

☒ I have other host(s) on WAN segment

IP Address

-

WAN DNS Servers

DNS server 1:

DNS server 2:


NOTE: The DHCP Server Settings will be overwritten.


The following WAN settings will be overwritten: Connection Method, MTU, Health Check, Additional Public IP, and Dynamic DNS Settings.

The PPTP Server will be disabled.

Tip: please review the DNS Forwarding setting under the Service Forwarding section.










| Drop-in Mode Settings | |
|-----------------------|---|
| Enable | Drop-in mode eases the installation of the Pepwave MAX on a live network between the existing firewall and router, such that no configuration changes are required on existing equipment. Check the box to enable the drop-in mode feature. |
| WAN for Drop-In Mode | Select the WAN port to be used for drop-in mode. If WAN is selected, the high availability feature will be disabled automatically. |
| Shared Drop-In IPA | <p>When this option is enabled, the passthrough IP address will be used to connect to WAN hosts (email notification, remote syslog, etc.). The MAX will listen for this IP address when WAN hosts access services provided by the MAX (web admin access from the WAN, DNS server requests, etc.).</p> <p>To connect to hosts on the LAN (email notification, remote syslog, etc.), the default gateway address will be used. The MAX will listen for this IP address when LAN hosts access services provided by the MAX (web admin access from the WAN, DNS proxy, etc.).</p> |

| | |
|----------------------------|---|
| Shared IP AddressA | Access to this IP address will be passed through to the LAN port if this device is not serving the service being accessed. The shared IP address will be used in connecting to hosts on the WAN (e.g., email notification, remote syslog, etc.) The device will also listen on the IP address when hosts on the WAN access services served on this device (e.g., web admin accesses from WAN, DNS server, etc.) |
| WAN Default Gateway | Enter the WAN router's IP address in this field. If there are more hosts in addition to the router on the WAN segment, click the  button next to "WAN Default Gateway" and check the other host(s) on the WAN segment box and enter the IP address of the hosts that need to access LAN devices or be accessed by others. |
| WAN DNS Servers | Enter the selected WAN's corresponding DNS server IP addresses. |

A – Advanced feature, please click the  button on the top right-hand corner to activate.

Port Settings

To configure port settings, navigate to **Network > Port Settings**

| Port Settings | | | | | |
|---------------|-------------------------------------|--|-------------------------------------|---|---|
| Port Name | Enable | Speed | Advertise Speed | Port Type | VLAN |
| LAN Port 1 | <input checked="" type="checkbox"/> | Auto  | <input checked="" type="checkbox"/> | Trunk  | Any  |
| LAN Port 2 | <input checked="" type="checkbox"/> | | | Trunk  | Any  |
| LAN Port 3 | <input checked="" type="checkbox"/> | | | Trunk  | Any  |
| LAN Port 4 | <input checked="" type="checkbox"/> | | | Trunk  | Any  |

On this screen, you can enable specific ports, as well as determine the speed of the LAN ports, whether each port is a trunk or access port, as well as which VLAN each link belongs to, if any.

Captive Portal

The captive portal serves as a gateway that clients have to pass if they wish to access the internet using your router. To configure, navigate to **Network > LAN > Captive Portal**.

Captive Portal

General Settings

Name

Enable

☒ Untagged LAN

Hostname

?

Default

Access Mode

☒ Open Access ☐ User Authentication ☐ External Server

Portal Access Settings

Access Quota

30

mins (0: Unlimited)

0

MB (0: Unlimited)

Quota Reset Time

☒ Daily at

00

:00
 ☐ 1440 minutes after quota reached

Inactive Timeout

0

minutes (0: No Timeout)

Allowed Networks

?

Domain Name / IP Address / Network

+

Allowed Clients

MAC / IP Address / Host Identifier

+

Splash Page

?

☒ Built-in ☐ External, URL:

http://

Popup Handling

☐ Bypass Popup (Redirection only takes place on normal browser)
 ☐ Automatically show splash page on Safari for Apple (iOS / macOS) devices

Logout Hostname

?

(Not configured)

Click [here](#) to preview / customize built-in splash page

Save

Cancel

Captive Portal Settings

| | |
|--------------------|--|
| Name | Enter the name for the Captive Portal. |
| Enable | Check Enable and then, optionally, select the LANs/VLANs that will use the captive portal. |
| Hostname | To customize the portal's form submission and redirection URL, enter a new URL in this field. To reset the URL to factory settings, click Default . |
| Access Mode | <p>Click Open Access to allow clients to freely access your router. Click User Authentication to force your clients to authenticate before accessing your router.</p> <p>Select External Server to use the Captive Portal with a HotSpot system.</p> <p>As described in the following knowledgebase article:</p> <p>https://forum.peplink.com/t/using-hotspotsystem-wi-fi-on-pepwave-max-routers/ (https://forum.peplink.com/t/using-hotspotsystem-wi-fi-on-pepwave-max-routers/)</p> |

Authentication

When selecting the “**User Authentication**” in the Access Mode field, you will see the available option for the Authentication via drop-down list:

- RADIUS Server

| | | |
|-----------------------------|--|---|
| Access Mode | <input type="radio"/> Open Access <input checked="" type="radio"/> User Authentication <input type="radio"/> External Server | |
| Authentication | RADIUS Server ▼ | |
| RADIUS Settings | | |
| | Primary | Secondary |
| Authentication Protocol | PAP ▼ | |
| | You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles | |
| Authentication Host | <input type="text"/> | <input type="text"/> |
| Authentication Port | <input type="text" value="1812"/> | <input type="text" value="1812"/> |
| Authentication Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |
| | You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles | |
| Accounting Host | <input type="text"/> | <input type="text"/> |
| Accounting Port | <input type="text" value="1813"/> | <input type="text" value="1813"/> |
| Accounting Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |
| CoA-DM | <input type="checkbox"/> | |
| Accounting Interim Interval | <input type="text"/> ? | |
| NAS-Identifier | <input type="text"/> ? Device Name ▼ | |

- LDAP Server

| | | |
|----------------------|--|--|
| Access Mode | <input type="radio"/> Open Access <input checked="" type="radio"/> User Authentication <input type="radio"/> External Server | |
| Authentication | LDAP Server ▼ | |
| LDAP Settings | | |
| LDAP Server | <input type="text"/> | Port <input type="text"/> <input type="button" value="Default"/> |
| | <input type="checkbox"/> Use DN/Password to bind to LDAP Server | |
| Base DN | <input type="text"/> | |
| Base Filter | <input type="text"/> | |

Fill in the necessary information to complete your connection to the server and enable authentication.

External Server

When selecting the “**External Server**” in the Access Mode field, you will see the available option for the Service Type via drop-down list:

- CoovaChilli

| | |
|-------------|--|
| Access Mode | <input type="radio"/> Open Access <input type="radio"/> User Authentication <input checked="" type="radio"/> External Server |
| Server Type | <input type="text" value="CoovaChilli"/> |



| | |
|----------------------|--|
| CoovaChilli Settings | |
| UAM Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |

- HotspotSystem

| | |
|-------------|--|
| Access Mode | <input type="radio"/> Open Access <input type="radio"/> User Authentication <input checked="" type="radio"/> External Server |
| Server Type | <input type="text" value="HotspotSystem"/> |

| | |
|------------------------|---|
| HotspotSystem Settings | |
| Operator Username | <input type="text"/> |
| Location ID | <input type="text"/> |
| Splash Page Domain | <input type="text" value="customer.hotspotsystem.com"/> |

Fill in the necessary information to complete your connection to the server and enable authentication.

| | |
|-----------------------|--|
| Access Quota | Set a time and data cap to each user’s Internet usage. |
| Quota Reset Time | This menu determines how your usage quota resets. Setting it to Daily will reset it at a specified time every day. Setting a number of minutes after quota reached establish a timer for each user that begins after the quota has been reached. |
| Inactive Timeout | Clients will get disconnected when the inactive the configured time is reached. Default 0: no timeout |
| Allowed Networks | Add networks that can bypass the captive Portal in this field. To whitelist a network, enter the domain name / IP address here and click  . To delete an existing network from the list of allowed networks, click the  button next to the listing. |
| Allowed Clients | Add MAC address and /or IP addresses for client devices that are allowed to bypass the Captive Portal. Clients accessing these domains and IP addresses will not be redirected to the splash page. |
| Splash Page | Here, you can choose between using the Pepwave router’s built-in captive portal and redirecting clients to a URL you define. |
| Popup Handling | Configurable options for popup handling: – Bypass Popup (Redirection only takes place on normal browser) – Automatically show splash page on Safari for Apple (iOS / macOS) devices |
| Logout Hostname | A hostname that can be used to logout captive portal when being accessed on browser. |
| Customize splash page | Click on the provided link in the Captive portal profile to customize the splash page. A new browser tab is opened with a WYSIWYG editor of the splash page o edit the content, click on the corresponding element after switching Edit Mode to ON. |

Captive Portal



☐ Use uploaded Logo Image

☒ Use default Logo Image

☐ No file chosen

NOTE: Size max 512KB. Supported images types: JPEG, PNG and GIF.

EMPTY STRING

☒ I have read and agree to the [terms and conditions](#) ?

You must accept the terms and conditions before you can proceed

Agree

Powered by Pepwave.

Portal Configuration

| | |
|---------------------|-------------------------------------|
| Show Quota Status | <input checked="" type="checkbox"/> |
| Custom Landing Page | <input type="checkbox"/> |

Page: Edit mode ON ?

Save

Ch9. Configuring the WAN Interface(s)

WAN Interface settings are located at **Network>WAN**. To reorder WAN priority, drag on the appropriate WAN by holding the left mouse button, move it to the desired priority (the first one would be the highest priority, the second one would be lower priority, and so on), and drop it by releasing the mouse button.

PEPWAVE

Dashboard
SFC Protect
Network
Advanced
AP
System
Status

Apply Changes

General

Logout

WAN Connection Status

Priority 1 (Highest)

WAN

Connected

Priority 2

Drag desired (Priority 2) connections here

Disabled

Cellular

Disabled

(No IP Address)

1 Wi-Fi WAN on 2.4 GHz

Disabled

(No IP Address)

2 Wi-Fi WAN on 5 GHz

Disabled

(No IP Address)

LAN Interface

Router IP Address: 192.168.50.1

Wi-Fi AP

2.4 GHz

5 GHz

PEPWAVE

ON

Status

Device Information

Model:

Pepwave MAX BR1 MK2

Firmware:

8.3.0 build 5109

Uptime:

6 days 8 hours 28 minutes

CPU Load:

16%

Throughput:

↓ 9.0 kbps ↑ 32.0 kbps

Remote Assistance Status:

Turn off

Copyright © Pepwave. All rights reserved.


To able a particular WAN connection, drag on the appropriate WAN by holding the left mouse button, move it the **Disabled** row, and drop it by releasing the mouse button.

You can also set priorities on the **Dashboard**. Click the **WAN** button in the corresponding row to modify the connection setting.

Important Note


Connection details will be changed and become effective immediately after clicking the **Save and Apply** button.

IPv6




You can also enable IPv6 support in this section.

DNS over HTTPS (DoH)



You can enable DoH (DNS over HTTPS) support in this section.

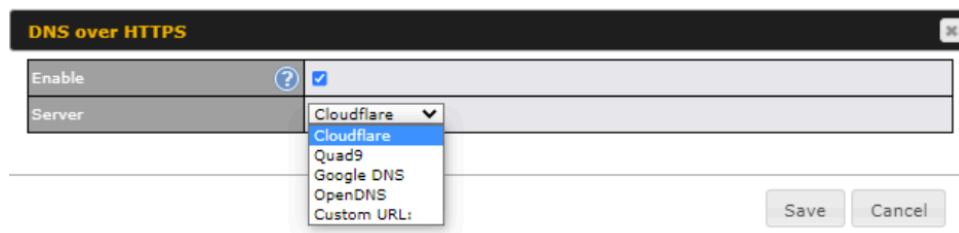

DNS over HTTPS

Enable When this option is enabled, the DNS proxy server will use HTTPS connections to forward DNS requests to the DoH resolver; it will not fallback to traditional UDP DNS options.

Server The options to configure DoH with a predefined server are:

- Cloudflare – The DNS server IP addresses for **Cloudflare** will be using 1.1.1.1, which is unfiltered.
- Quad9 – The DNS server IP addresses for **Quad9** will be using 9.9.9.9 and 142.112.112.112, which is malware blocking and DNSSEC.
- Google DNS – The DNS server IP addresses for **Google DNS** will be using 8.8.8.8 and 8.8.4.4, which is RFC8484 standard.
- OpenDNS – The DNS server IP addresses for **OpenDNS** will be using 208.67.222.222 and 208.67.220.220, which is standard DNS.
- Custom URL – You may select **Custom URL:**, and enter the **resolver URL** and **IP address**.

WAN Quality Monitoring

This settings advice how WAN Quality information is being gathered.



By default, WAN Quality will always be observed and gathered automatically. With customized choice of WAN connections, the device will always observe WAN Quality of those selected WAN connections. Other WAN connections may stop observing WAN Quality information if it is not necessary for the underlying features.

Synergy Mode

You can enable the Synergy Controller in this section.



You may click this  to enable the Synergy Controller. By default, the setting is disabled.

The screenshot shows a window titled "Synergy Controller" with a close button in the top right corner. The window is divided into two main sections. The top section, labeled "WAN Connection", contains two checkboxes: "WAN 1" (checked) and "SFP 1" (unchecked). The bottom section, labeled "Permitted Synergized Devices", contains two radio buttons: "Any" (unchecked) and "Approved List" (checked). Below the radio buttons is a large, empty rectangular box. At the bottom of this box, the text "(One serial number per line)" is displayed. At the bottom right of the window, there are two buttons: "Save" and "Cancel".

You may select the WAN connection to use as a Synergy Link which will connect to synergized devices.

Ethernet WAN

DHCP Connection (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-9-configuring-the-wan-interfaces/ethernet-wan/dhcp-connection/>)

Static IP Connection (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-9-configuring-the-wan-interfaces/ethernet-wan/static-ip-connection/>)

PPPoE Connection (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-9-configuring-the-wan-interfaces/ethernet-wan/pppoe-connection/>)


L2TP Connection (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-9-configuring-the-wan-interfaces/ethernet-wan/l2tp-connection/>)

GRE Connection (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-9-configuring-the-wan-interfaces/ethernet-wan/gre-connection/>)

DHCP Connection

The DHCP connection method is suitable if the ISP provides an IP address automatically using DHCP (e.g., satellite modem, WiMAX modem, cable, Metro Ethernet, etc.).

| WAN Connection Settings | |
|------------------------------|--|
| WAN Connection Name | <input type="text" value="WAN"/> |
| Enable | <input checked="" type="checkbox"/> |
| Connection Priority | <input checked="" type="radio"/> Always-on (Priority 1) <input type="radio"/> Backup |
| Independent from Backup WANs | <input type="checkbox"/> |
| Connection Method | <input type="text" value="DHCP"/> |
| Routing Mode | <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| Management IP Address | <input type="text" value="255.255.255.0"/> (/24) |
| Custom Hostname | <input type="checkbox"/> |
| DNS Servers | <input checked="" type="checkbox"/> Obtain DNS server address automatically <input type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |
| IP Passthrough | <input type="checkbox"/> |
| Standby State | <input checked="" type="radio"/> Remain connected <input type="radio"/> Disconnect |
| Reply to ICMP Ping | <input checked="" type="radio"/> Yes <input type="radio"/> No |
| Upload Bandwidth | <input type="text" value="1"/> Gbps |
| Download Bandwidth | <input type="text" value="1"/> Gbps |

| DHCP Connection Settings | |
|------------------------------|--|
| WAN Connection Name | Enter a name to represent this WAN connection. |
| Enable | This setting enables the WAN connection. If schedules have been defined, you will be able to select a schedule to apply to the connection. |
| Connection Priority | <p>This option allows you to configure the WAN connection whether for normal daily usage or as a backup connection only.</p> <p>If Always-on is chosen, the WAN connection will be kept on continuously, regardless of the priority of other WAN connections.</p> <p>If Backup is chosen, the WAN connection will depend on other WAN connections. It will not be used when one or more higher priority dependent WAN connections are connected.</p> |
| Independent from Backup WANs | If this is checked, the connection will be working independent from other Backup WAN connections. Those in Backup Priority will ignore the status of this WAN connection, and will be used when none of the other higher priority connections are available. |
| Routing Mode | NAT allows substituting the real address in a packet with a mapped address that is routable on the destination network. By clicking the help  icon in this field, you can display the IP Forwarding option, if your network requires it. |
| Management IP Address | <p>Management IP Address is available for configuration when you click here for other DHCP settings.</p> <p>This option allows you to configure the management IP address for the DHCP WAN connection.</p> |
| Custom Hostname | If your service provider's DHCP server requires you to supply a hostname value upon acquiring an IP address, you may enter the value here. If your service provider does not provide you with the value, you can safely bypass this option. |

| | |
|---------------------------|--|
| DNS Servers | <p>Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection.</p> <p>Selecting Obtain DNS server address automatically results in the DNS servers being assigned by the WAN DHCP server to be used for outbound DNS lookups over the connection. (The DNS servers are obtained along with the WAN IP address assigned from the DHCP server.)</p> <p>When Use the following DNS server address(es) is selected, you may enter custom DNS server addresses for this WAN connection into the DNS Server 1 and DNS Server 2 fields.</p> |
| IP Passthrough | <p>When this IP Passthrough option is active, after the ethernet WAN connection is up, the router's DHCP server will offer the connection's IP address to one LAN client. All incoming or outgoing traffic will be routed without NAT.</p> <p>Regardless the WAN connection's state, the router always binds to the LAN IP address (Default: 192.168.50.1). So when the ethernet WAN is connected, the LAN client could access the router's web admin by manually configuring its IP address to the same subnet as the router's LAN IP address (e.g. 192.168.50.10).</p> <p>Note: when this option is firstly enabled, the LAN client may not be able to refresh its IP address to the ethernet WAN IP address in a timely fashion. The LAN client may have to manually renew its IP address from DHCP server. After this option is enabled, the DHCP lease time will be 2 minutes. I.e. the LAN client could refresh its IP address and access the network at most one minute after the ethernet WAN connection goes up.</p> |
| Standby State | <p>This option allows you to choose whether to remain connected when this WAN connection is no longer in the highest priority and has entered the standby state. When Remain connected is chosen, upon bringing up this WAN connection to active, it will be immediately available for use.</p> <p>If this WAN connection is charged by connection time, you may want to set this option to Disconnect so that connection will be made only when needed.</p> <p>SpeedFusion VPN may use connected standby WAN for failover if link failure detected on the higher priority WAN, you can set this option to Disconnect to avoid data passing through.</p> |
| Reply to ICMP PING | <p>If the checkbox is unticked, this option is disabled and the system will not reply to any ICMP ping echo requests to the WAN IP addresses of this WAN connection.</p> <p>Default: ticked (Yes)</p> |
| Upload Bandwidth | <p>This field refers to the maximum upload speed.</p> <p>This value is referenced when default weight is chosen for outbound traffic and traffic prioritization. A correct value can result in effective traffic prioritization and efficient use of upstream bandwidth.</p> |
| Download Bandwidth | <p>This field refers to the maximum download speed.</p> <p>Default weight control for outbound traffic will be adjusted according to this value.</p> |

Static IP Connection

The Static IP connection method is suitable if your ISP provides a static IP address to connect directly.

| | |
|-------------------|--|
| Connection Method |  Static IP ▼ |
| Routing Mode |  <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| IP Address |  <input type="text"/> |
| Subnet Mask | 255.255.255.0 (/24) ▼ |
| Default Gateway | <input type="text"/> |
| DNS Servers | <input checked="" type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |

Static IP Settings

| | |
|---------------------|--|
| Routing Mode | NAT allows substituting the real address in a packet with a mapped address that is routable on the destination network. By clicking the help icon in this field, you can display the IP Forwarding option, if your network requires it. |
|---------------------|--|

| | |
|---|--|
| IP Address / Subnet Mask / Default Gateway | These settings allow you to specify the information required in order to communicate on the Internet via a fixed Internet IP address. The information is typically determined by and can be obtained from the ISP. |
|---|--|

| | |
|--------------------|--|
| DNS Servers | Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection. |
|--------------------|--|

Selecting **Obtain DNS server address automatically** results in the DNS servers being assigned by the WAN DHCP server to be used for outbound DNS lookups over the connection. (The DNS servers are obtained along with the WAN IP address assigned from the DHCP server.

When **Use the following DNS server address(es)** is selected, you may enter custom DNS server addresses for this WAN connection into the **DNS Server 1** and **DNS Server 2** fields.

PPPoE Connection

The PPPoE connection method is suitable if your ISP provides a login ID/password to connect via PPPoE.

| | |
|-------------------------|--|
| Connection Method |  PPPoE ▼ |
| Routing Mode |  <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| PPPoE User Name | <input type="text"/> |
| PPPoE Password | <input type="password"/> |
| Confirm PPPoE Password | <input type="password"/> |
| Service Name (Optional) | <input type="text"/> Leave it blank unless it is provided by ISP |
| IP Address (Optional) |  <input type="text"/> Leave it blank unless it is provided by ISP |
| Keep-Alive Interval |  <input type="text" value="6"/> seconds(s) |
| Keep-Alive Retry |  <input type="text" value="6"/> |
| DNS Servers | <input checked="" type="checkbox"/> Obtain DNS server address automatically <input type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |

PPPoE Settings

Routing Mode NAT allows substituting the real address in a packet with a mapped address that is routable on the destination network. By clicking the help icon in this field, you can display the **IP Forwarding** option, if your network requires it.

PPPoE Username / Password Enter the required information in these fields in order to connect via PPPoE to the ISP. The parameter values are determined by and can be obtained from the ISP.

Confirm PPPoE Password Verify your password by entering it again in this field.

Service Name (Optional) Service name is provided by the ISP.
Note: Leave this field blank unless it is provided by your ISP.

IP Address (Optional) If your ISP provides a PPPoE IP address, enter it here.
Note: Leave this field blank unless it is provided by your ISP.

Keep Alive Interval This is the time interval between each Keep-Alive packet.

Keep-Alive Retry This is the number of consecutive Keep-Alive check failures before treating PPPoE connection as down.



DNS Servers Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection.

Selecting **Obtain DNS server address automatically** results in the DNS servers being assigned by the WAN DHCP server to be used for outbound DNS lookups over the connection. (The DNS servers are obtained along with the WAN IP address assigned from the DHCP server.)

When **Use the following DNS server address(es)** is selected, you may enter custom DNS server addresses for this WAN connection into the **DNS Server 1** and **DNS Server 2** fields.

L2TP Connection

L2TP has all the compatibility and convenience of PPTP with greater security. Combine this with IPsec for a good balance between ease of use and security.

| | |
|--------------------------|--|
| Connection Method |  L2TP ▼ |
| Routing Mode |  <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| L2TP User Name | <input type="text"/> |
| L2TP Password | <input type="password"/> |
| Confirm L2TP Password | <input type="password"/> |
| Server IP Address / Host | <input type="text"/> |
| Address Type | <input checked="" type="radio"/> Dynamic IP <input type="radio"/> Static IP |
| DNS Servers | <input checked="" type="checkbox"/> Obtain DNS server address automatically <input type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |

L2TP Settings

Routing Mode NAT allows substituting the real address in a packet with a mapped address that is routable on the destination network. By clicking the help icon in this field, you can display the **IP Forwarding** option, if your network requires it.

L2TP Username / Password Enter the required information in these fields in order to connect via L2TP to your ISP.

The parameter values are determined by and can be obtained from your ISP.

Confirm L2TP Password Verify your password by entering it again in this field.

Server IP Address / Host L2TP server address is a parameter which is provided by your ISP.

Note: Leave this field blank unless it is provided by your ISP.

Address Type Your ISP will also indicate whether the server IP address is Dynamic or Static. Please click the appropriate value.

DNS Servers Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection.

Selecting **Obtain DNS server address automatically** results in the DNS servers assigned by the PPPoE server to be used for outbound DNS lookups over the WAN connection.

(The DNS servers are obtained along with the WAN IP address assigned from the PPPoE server.)

When **Use the following DNS server address(es)** is selected, you can enter custom DNS server addresses for this WAN connection into the **DNS server 1** and **DNS server 2** fields.

GRE Connection

This connection method is suitable if your ISP provides a static WAN IP and Tunnel IP via GRE.

| | |
|--------------------------|--|
| Connection Method |  GRE ▼ |
| Routing Mode |  <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| WAN IP Address | <input type="text"/> |
| WAN Subnet Mask | 255.255.255.0 (/24) ▼ |
| WAN Default Gateway | <input type="text"/> |
| Remote GRE Host | <input type="text"/> |
| Tunnel Local IP Address | <input type="text"/> |
| Tunnel Remote IP Address | <input type="text"/> |
| Outgoing NAT IP Address | <input type="text"/> |
| DNS Servers | <input checked="" type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |

GRE Settings

Routing Mode

NAT allows substituting the real address in a packet with a mapped address that is routable on the destination network. By clicking the help icon in this field, you can display the **IP Forwarding** option, if your network requires it.

WAN IP Address / Subnet Mask / Default Gateway

These settings allow you to specify the information required in order to communicate on the Internet via a fixed Internet IP address. The information is typically determined by and can be obtained from the ISP.

Remote GRE Host

This field allows you to enter the IP address of the remote GRE.

Tunnel Local IP Address

This field allows you to enter the IP address of the local tunnel for the GRE tunnel connection.

Tunnel Remote IP Address

This field allows you to enter the IP address of the remote tunnel for the GRE tunnel connection.

Outgoing NAT IP Address

This field is to enter the NAT IP address for outgoing via GRE tunnel.

DNS Servers


Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection.

Selecting **Obtain DNS server address automatically** results in the DNS servers assigned by the PPPoE server to be used for outbound DNS lookups over the WAN connection.


(The DNS servers are obtained along with the WAN IP address assigned from the PPPoE server.)

When **Use the following DNS server address(es)** is selected, you can enter custom DNS server addresses for this WAN connection into the **DNS server 1** and **DNS server 2** fields.

Cellular WAN

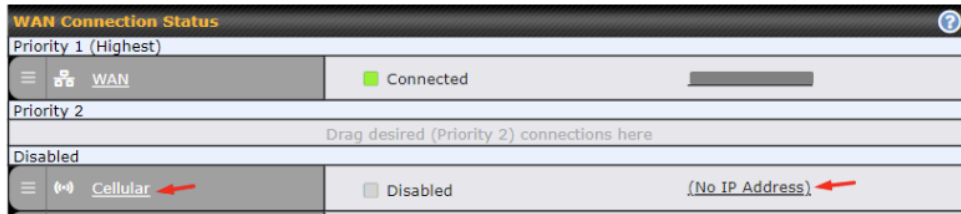

To access/configure the Cellular WAN settings, click **Network > Cellular Name**. You may click the “No IP Address” link to view the Cellular WAN details/status.

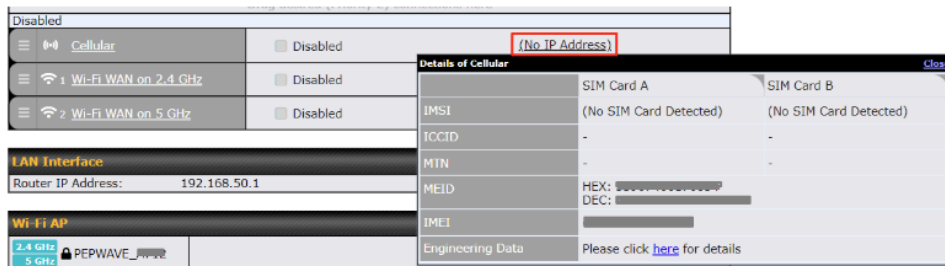

WAN Connection Status

IMSI This is the International Mobile Subscriber Identity which uniquely identifies the SIM card. This is applicable to 3G modems only.

ICCID This is a unique number assigned to a SIM card (https://techterms.com/definition/sim_card) used in a cellular device.

MTN Thi field is to display the mobile telephone number of the SIM card.

MEID Some Pepwave routers support both HSPA and EV-DO. For Sprint or Verizon Wireless EV-DO users, a unique MEID identifier code (in hexadecimal format) is used by the carrier to associate the EV-DO device with the user. This information is presented in hex and decimal format.

IMEI This is the unique ID for identifying the modem in GSM/HSPA mode.

| WAN Connection Settings | |
|------------------------------|--|
| WAN Connection Name | Cellular |
| Enable | <input checked="" type="checkbox"/> |
| Connection Priority | <input checked="" type="radio"/> Always-on (Priority 1) <input type="radio"/> Backup |
| Independent from Backup WANs | <input type="checkbox"/> |
| Routing Mode | <input checked="" type="radio"/> NAT |
| Management IP Address | <input type="text"/> 255.255.255.0 (/24) <input type="button" value="v"/> |
| DNS Servers | <input checked="" type="checkbox"/> Obtain DNS server address automatically <input type="checkbox"/> Use the following DNS server address(es) DNS Server 1: <input type="text"/> DNS Server 2: <input type="text"/> |
| IP Passthrough | <input type="checkbox"/> |
| Standby State | <input checked="" type="radio"/> Remain connected <input type="radio"/> Disconnect |
| Idle Disconnect | <input type="checkbox"/> |
| Reply to ICMP Ping | <input checked="" type="radio"/> Yes <input type="radio"/> No |

| WAN Connection Settings | |
|-------------------------------------|---|
| WAN Connection Name | Indicate a name you wish to give this Cellular WAN connection |
| Enable | Click the checkbox to toggle the on and off state of this connection. |
| Connection Priority | <p>This option allows you to configure the WAN connection whether for normal daily usage or as a backup connection only.</p> <p>If Always-on is chosen, the WAN connection will be kept on continuously, regardless of the priority of other WAN connections.</p> <p>If Backup is chosen, the WAN connection will depend on other WAN connections. It will not be used when one or more higher priority dependent WAN connections are connected.</p> |
| Independent from Backup WANs | If this is checked, the connection will be working independent from other Backup WAN connections. Those in Backup Priority will ignore the status of this WAN connection, and will be used when none of the other higher priority connections are available. |
| Routing Mode | <p>This option allows you to select the routing method to be used in routing IP frames via the WAN connection. The mode can be either NAT (Network Address Translation) or IP Forwarding.</p> <p>In the case if you need to choose IP Forwarding for your scenario. Click the  button to enable IP Forwarding.</p> |
| Management IP Address | <p>Management IP Address is available for configuration when you click here for other DHCP settings.</p> <p>This option allows you to configure the management IP address for the DHCP WAN connection.</p> |
| DNS Servers | <p>Each ISP may provide a set of DNS servers for DNS lookups. This setting specifies the DNS (Domain Name System) servers to be used when a DNS lookup is routed through this connection.</p> <p>Selecting Obtain DNS server address automatically results in the DNS servers assigned by the WAN DHCP server being used for outbound DNS lookups over the connection. (The DNS servers are obtained along with the WAN IP address assigned by the DHCP server.)</p> <p>When Use the following DNS server address(es) is selected, you may enter custom DNS server addresses for this WAN connection into the DNS server 1 and DNS server 2 fields.</p> |

| | |
|---------------------------|--|
| IP Passthrough | <p>When this IP Passthrough option is active, after the cellular WAN connection is up, the router's DHCP server will offer the connection's IP address to one LAN client. All incoming or outgoing traffic will be routed without NAT.</p> <p>Regardless the WAN connection's state, the router always binds to the LAN IP address (Default: 192.168.50.1). So when the cellular WAN is connected, the LAN client could access the router's web admin by manually configuring its IP address to the same subnet as the router's LAN IP address (e.g. 192.168.50.10).</p> <p>Note: when this option is firstly enabled, the LAN client may not be able to refresh its IP address to the cellular WAN IP address in a timely fashion. The LAN client may have to manually renew its IP address from DHCP server. After this option is enabled, the DHCP lease time will be 2 minutes. I.e. the LAN client could refresh its IP address and access the network at most one minute after the cellular WAN connection goes up</p> |
| Standby State | <p>This option allows you to choose whether to remain connected or disconnected when this WAN connection is no longer in the highest priority and has entered the standby state. When Remain connected is chosen, bringing up this WAN connection to active makes it immediately available for use.</p> |
| Idle Disconnect | <p>If this is checked, the connection will disconnect when idle after the configured Time value. This option is disabled by default.</p> |
| Reply to ICMP PING | <p>If the checkbox is unticked, this option is disabled and the system will not reply to any ICMP ping echo requests to the WAN IP addresses of this WAN connection.</p> <p>Default: ticked (Yes)</p> |

| Cellular Settings | | | | | | | | | | |
|--|--|---|---|-------------|---|-------------|---|-------------|--|-------------|
| SIM Card | <input type="radio"/> Alternate between SIM A and SIM B periodically <input checked="" type="radio"/> Custom Selection <table border="0"> <tr> <td><input checked="" type="checkbox"/> SIM A</td> <td>Priority: 2</td> </tr> <tr> <td><input checked="" type="checkbox"/> SIM B</td> <td>Priority: 3</td> </tr> <tr> <td><input checked="" type="checkbox"/> RemoteSIM</td> <td>Priority: 4</td> </tr> <tr> <td><input checked="" type="checkbox"/> SpeedFusion Connect 5G/LTE</td> <td>Priority: 1</td> </tr> </table> | | <input checked="" type="checkbox"/> SIM A | Priority: 2 | <input checked="" type="checkbox"/> SIM B | Priority: 3 | <input checked="" type="checkbox"/> RemoteSIM | Priority: 4 | <input checked="" type="checkbox"/> SpeedFusion Connect 5G/LTE | Priority: 1 |
| <input checked="" type="checkbox"/> SIM A | Priority: 2 | | | | | | | | | |
| <input checked="" type="checkbox"/> SIM B | Priority: 3 | | | | | | | | | |
| <input checked="" type="checkbox"/> RemoteSIM | Priority: 4 | | | | | | | | | |
| <input checked="" type="checkbox"/> SpeedFusion Connect 5G/LTE | Priority: 1 | | | | | | | | | |
| RemoteSIM Settings | Control by FusionSIM Cloud <div> <input type="text"/> <input type="button" value="G"/> </div> Scan nearby RemoteSIM server | | | | | | | | | |
| Fallback to Preferred SIM when | <input checked="" type="checkbox"/> Device is idle Idle Timeout: <input type="text" value="3"/> <small>Time value is global. A change will affect all WAN profiles.</small> <input type="checkbox"/> Non-preferred SIM is connected for <input type="text" value="10"/> minutes | | | | | | | | | |
| | SIM Card A | SIM Card B | | | | | | | | |
| Carrier Selection | <input checked="" type="radio"/> Auto <input type="radio"/> Manual Select <input type="radio"/> Custom PLMN | <input checked="" type="radio"/> Auto <input type="radio"/> Manual Select <input type="radio"/> Custom PLMN | | | | | | | | |
| LTE/3G | <input type="button" value="Auto"/> | <input type="button" value="Auto"/> | | | | | | | | |
| Optimal Network Discovery | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | |
| Band Selection | <input type="button" value="Auto"/> | <input type="button" value="Auto"/> | | | | | | | | |
| Data Roaming | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | |
| Authentication | <input type="button" value="Auto"/> | <input type="button" value="Auto"/> | | | | | | | | |
| Operator Settings | <input checked="" type="radio"/> Auto <input type="radio"/> Custom | <input checked="" type="radio"/> Auto <input type="radio"/> Custom | | | | | | | | |
| APN | | | | | | | | | | |
| Username | | | | | | | | | | |
| Password | | | | | | | | | | |
| Confirm Password | | | | | | | | | | |
| SIM PIN (Optional) | <input type="text"/> <input type="text"/> (Confirm) | <input type="text"/> <input type="text"/> (Confirm) | | | | | | | | |
| Bandwidth Allowance Monitor | <input checked="" type="checkbox"/> Enable | <input type="checkbox"/> Enable | | | | | | | | |
| Action | Email notification is currently disabled. You can get notified when usage hits 75%/95% of monthly allowance by enabling Email Notification . <input checked="" type="checkbox"/> Disconnect when usage hits 100% of monthly allowance | Email notification is currently disabled. You can get notified when usage hits 75%/95% of monthly allowance by enabling Email Notification . <input type="checkbox"/> Disconnect when usage hits 100% of monthly allowance | | | | | | | | |
| Start Day | On <input type="button" value="1st"/> of each month at 00:00 midnight | On <input type="button" value="1st"/> of each month at 00:00 midnight | | | | | | | | |
| Monthly Allowance | <input type="text"/> GB | <input type="text"/> GB | | | | | | | | |

Cellular Settings

SIM Card


If **"Alternate between SIM A and SIM B periodically"** is selected, the SIM card will be switching according to the schedule time in the SIM Cards Alternate.

If **"Custom Selection"** is selected, you can designate the priority of the SIM cards (SIM A/ SIM B/ Remote SIM/ SpeedFusion Connect) and connect to.

For routers that support the SIM Injector, you may select the "Remote SIM" to provision a SIM from a SIM Injector. Further details on the SIM Injector found is available here: <https://www.peplink.com/products/sim-injector/> (<https://www.peplink.com/products/sim-injector/>).

Remote SIM Settings

If “**Use Remote SIM Only**” is selected in the SIM card section, the **Remote SIM Settings** will be shown.



You may need to enable the remote SIM Host settings in the Remote SIM management, see the **section 22.10** or **Appendix B** for more details on FusionSIM. After that, click on “**Scan nearby remote SIM server**” to show the serial number(s) of the connected SIM Injector(s).


If you want to select a specific SIM, in the Cellular Settings, type “:” and then the number of the SIM slot, eg.1111-2222-3333:7.

Fallback to Preferred SIM when

This option is allowing to switch to another SIM cards when the Cellular WAN reached fallback timeout.


SIM Cards Alternate

If “**Alternate between SIM A and SIM B periodically**” is selected in the SIM Card section, the SIM Cards Alternate will be shown:



You may set the schedule time for for switching between SIM A only and SIM B only.

5G/LTE/3G

This drop-down menu allows restricting cellular to particular band. Click the  button to enable the selection of specific bands.

Optimal Network Discovery

Cellular WANs by default will only handover from 3G to LTE network when there is no active data traffic, enable this option will make it run the handover procedures after fallback to 3G for a defined effective period, even this may interrupt the connectivity for a short while.

Band Selection

When set to **Auto**, band selection allows for automatically connecting to available, supported bands (frequencies) .
When set to Manual, you can manually select the bands (frequencies) the SIM will connect to.

Data Roaming

This checkbox enables data roaming on this particular SIM card. When data roaming is enabled this option allows you to select in which countries the SIM has a data connection. The option is configured by using MMC (country) codes.Please check your service provider’s data roaming policy before proceeding.

Authentication

Choose from **PAP Only** or **CHAP Only** to use those authentication methods exclusively. Select **Auto** to automatically choose an authentication method.

Operator Settings

This setting allows you to configure the APN settings of your connection. If **Auto** is selected, the mobile operator should be detected automatically. The connected device will be configured and connection will be made automatically. If there is any difficulty in making connection, you may select **Custom** to enter your carrier’s **APN**, **Login**, **Password**, and **Dial Number** settings manually. The correct values can be obtained from your carrier. The default and recommended setting is **Auto**.

| | |
|---|--|
| APN / Login / Password / SIM PIN | When Auto is selected, the information in these fields will be filled automatically. Select Custom to customize these parameters. The parameter values are determined by and can be obtained from the ISP. |
| Bandwidth Allowance Monitor | Check the box Enable to enable bandwidth usage monitoring on this WAN connection for each billing cycle. When this option is not enabled, bandwidth usage of each month is still being tracked but no action will be taken. |
| Action | If email notification is enabled, you will be notified by email when usage hits 75% and 95% of the monthly allowance. If Disconnect when usage hits 100% of monthly allowance is checked, this WAN connection will be disconnected automatically when the usage hits the monthly allowance. It will not resume connection unless this option has been turned off or the usage has been reset when a new billing cycle starts. |
| Start Day | This option allows you to define which day of the month each billing cycle begins. |
| Monthly Allowance | This field is for defining the maximum bandwidth usage allowed for the WAN connection each month. |

Signal Threshold Settings



If signal threshold is defined, this connection will be treated as down when a weaker than threshold signal is determined.

The following values are used by the threshold scale:

| | 0 bars | 1 bar | 2 bars | 3 bars | 4 bars | 5 bars |
|-------------------|--------|-------|--------|--------|--------|--------|
| LTE / RSRP | -140 | -128 | -121 | -114 | -108 | -98 |
| 3G / RSSI | -120 | -100 | -95 | -90 | -85 | -75 |

To define the threshold manually using specific signal strength values, please click on the question Mark and the following field will be visible.

| Signal Threshold Settings | | | | | |
|---------------------------|-----------|-----|----------------|------|--|
| LTE | RSRP: n/a | dBm | (Recovery: n/a | dBm) | |
| | SINR: n/a | dB | (Recovery: n/a | dB) | |
| 3G | RSSI: n/a | dBm | (Recovery: n/a | dBm) | |


Wi-Fi WAN

| | |
|------------------------|---|
| Disabled | |
| Cellular | <input type="checkbox"/> Disabled (No IP Address) |
| 1 Wi-Fi WAN on 2.4 GHz | <input type="checkbox"/> Disabled (No IP Address) |
| 2 Wi-Fi WAN on 5 GHz | <input type="checkbox"/> Disabled (No IP Address) |

To access/configure the Cellular WAN settings, click **Network > Wi-Fi WAN Connection Name**.


| WAN Connection Settings | |
|------------------------------|--|
| WAN Connection Name | <input type="text" value="Wi-Fi WAN on 2.4 GHz"/> |
| Enable | <input checked="" type="checkbox"/> |
| Connection Priority | <input checked="" type="radio"/> Always-on (Priority 1) <input type="radio"/> Backup |
| Independent from Backup WANs | <input type="checkbox"/> |
| Routing Mode | <input checked="" type="radio"/> NAT <input type="radio"/> IP Forwarding |
| Standby State | <input checked="" type="radio"/> Remain connected <input type="radio"/> Disconnect |
| Reply to ICMP Ping | <input checked="" type="radio"/> Yes <input type="radio"/> No |

WAN Connection Settings

| | |
|-------------------------------------|--|
| WAN Connection Name | Enter a name to represent this Wi-Fi WAN connection. |
| Enable | Click the checkbox to toggle the on and off state of this connection. |
| Connection Priority | <p>This option allows you to configure the WAN connection whether for normal daily usage or as a backup connection only.</p> <p>If Always-on is chosen, the WAN connection will be kept on continuously, regardless of the priority of other WAN connections.</p> <p>If Backup is chosen, the WAN connection will depend on other WAN connections. It will not be used when one or more higher priority dependent WAN connections are connected.</p> |
| Independent from Backup WANs | If this is checked, the connection will be working independent from other Backup WAN connections. Those in Backup Priority will ignore the status of this WAN connection, and will be used when none of the other higher priority connections are available. |
| Routing Mode | <p>This option allows you to select the routing method to be used in routing IP frames via the WAN connection. The mode can be either NAT (Network Address Translation) or IP Forwarding.</p> <p>In the case if you need to choose IP Forwarding for your scenario. Click the  button to enable IP Forwarding.</p> |
| Standby State | This setting specifies the state of the WAN connection while in standby. The available options are Remain Connected and Disconnect . |
| Reply to ICMP PING | If this setting is disabled, the WAN connection will not respond to ICMP ping requests. By default, this setting is enabled. |

| Wi-Fi WAN Settings | |
|-----------------------------|--|
| Channel Width | <input type="text" value="Auto"/> |
| Channel | <input checked="" type="radio"/> Auto <input type="radio"/> Custom |
| Output Power | <input type="text" value="Max"/> <input type="checkbox"/> Boost |
| Data Rate | <input checked="" type="radio"/> Auto <input type="radio"/> Fixed |
| Roaming | <input type="checkbox"/> Enable |
| Connect to Any Open Mode AP | <input type="radio"/> Yes <input checked="" type="radio"/> No |
| Beacon Miss Counter | <input type="text" value="5"/> |
| Channel Scan Interval | <input type="text" value="50"/> ms |

Wi-Fi WAN Settings

| | |
|------------------------------------|---|
| Channel Width | Select the channel width for this Wi-Fi WAN. 20MHz will have greater support for older devices using 2.4Ghz, while 40MHz is appropriate for networks with newer devices that connect using 5Ghz |
| Channel | Determine whether the channel will be automatically selected. If you select custom, the following table will appear: <div data-bbox="550 254 1289 522" data-label="Image"> </div> |
| Output Power | If you are setting up a network with many Wi-Fi devices in close proximity, then you can configure the output power here. Click the “boost” button for additional power. However, with that option ticked, output power may exceed local regulatory limits. |
| Data Rate | Selecting Auto will enable the router to automatically determine the best data rate, while manually selecting a rate will force devices to connect using the fixed rate. |
| Roaming | Checking this box will enable Wi-Fi roaming. Click the  icon for additional options. |
| Connect to Any Open Mode AP | This option is to specify whether the Wi-Fi WAN will connect to any open mode access points it finds. |
| Beacon Miss Counter | This sets the threshold for the number of missed beacons. |
| Channel Scan Interval | Configure Channel Scan Interval in ms. |

Creating Wi-Fi Connection Profiles

You can manually create a profile to connect to a Wi-Fi connection. This is useful for creating a profile for connecting to hidden-SSID access points. Click **Network > Wi-Fi WAN > Create Profile...** to get started.



This will open a window similar to the one shown below

Create Wi-Fi Connection Profile

Wi-Fi Connection

| | |
|---------------------|---|
| Network Name (SSID) | <input type="text"/> |
| Security | WPA2/WPA3-Personal |
| Shared Key | <div><input type="text"/><div><input checked="" type="checkbox"/> Hide Characters</div></div> |
| Preferred BSSID | <input type="checkbox"/> |
| Connection Method | <div><div>?</div>DHCP</div> |
| | Click here for other DHCP settings |
| DNS Servers | <div><div><input checked="" type="checkbox"/> Obtain DNS server address automatically</div><div><input type="checkbox"/> Use the following DNS server address(es)<div>DNS Server 1: <input type="text"/><div>DNS Server 2: <input type="text"/></div></div></div></div> |

OK

Cancel

Wi-Fi Connection Profile Settings

Network Name (SSID) Enter a name to represent this Wi-Fi connection.

Security This option allows you to select which security policy is used for this wireless network. Available options:

- Open
- WEP
- Enhanced Open (OWE)
- WPA3 -Personal
- WPA2/WPA3 -Personal
- WPA/ WPA2 – Personal
- WPA/ WPA2 – ENTERprise
- 802.1X with dynamic WEP key

Shared Key Enter the password for the wireless network.

Preferred BSSID Configure the BSSID. The BSSID is the MAC address of the wireless access point (WAP).

Connected Method Choose DHCP or Static IP for the Wi-Fi WAN connection method.

DNS Servers Configure the DNS servers that this WAN connection should use.

WAN Connection Settings (Common)

The remaining WAN-related settings are common to the WAN connection:

| Physical Interface Settings | |
|-----------------------------|--|
| Port Speed | <input type="button" value="?"/> Auto |
| MTU | <input type="button" value="?"/> <input type="radio"/> Auto <input checked="" type="radio"/> Custom 1440 |
| MSS | <input type="button" value="?"/> <input checked="" type="radio"/> Auto <input type="radio"/> Custom |
| MAC Address Clone | <input type="button" value="?"/> <input checked="" type="radio"/> Default <input type="radio"/> Custom 10:56:CA:15:92:5D |
| VLAN | <input type="button" value="?"/> <input type="checkbox"/> |

Physical Interface Settings

Speed This is the port speed of the WAN connection. It should be set to the same speed as the connected device in case of any port negotiation problems.

When a static speed is set, you may choose whether to advertise its speed to the peer device or not. Advertise Speed is selected by default. You can choose not to advertise the port speed if the port has difficulty in negotiating with the peer device.

Default: Auto

MTU This field is for specifying the Maximum Transmission Unit value of the WAN connection. An excessive MTU value can cause file downloads stall shortly after connected. You may consult your ISP for the connection's MTU value. Default value is 1440.

MSS This field is for specifying the Maximum Segment Size of the WAN connection.

When Auto is selected, MSS will be depended on the MTU value. When Custom is selected, you may enter a value for MSS. This value will be announced to remote TCP servers for maximum data that it can receive during the establishment of TCP connections.

Some Internet servers are unable to listen to MTU setting if ICMP is filtered by firewall between the connections.

Normally, MSS equals to MTU minus 40. You are recommended to reduce the MSS only if changing of the MTU value cannot effectively inform some remote servers to size down data size.

Default: Auto

MAC Address Clone Some service providers (e.g. cable network) identify the client's MAC address and require client to always use the same MAC address to connect to the network. If it is the case, you may change the WAN interface's MAC address to the client PC's one by entering the PC's MAC address to this field. If you are not sure, click the Default button to restore to the default value.

VLAN Check the box to assign a VLAN to the interface.

WAN Health Check

To ensure traffic is routed to healthy WAN connections only, the Pepwave router can periodically check the health of each WAN connection. The health check settings for each WAN connection can be independently configured via **Network>WAN>Details**.

Health Check Settings

Method This setting specifies the health check method for the WAN connection. This value can be configured as **Disabled**, **PING**, **DNS Lookup**, or **HTTP**. The default method is **DNS Lookup**. For mobile Internet connections, the value of **Method** can be configured as **Disabled** or **SmartCheck**.

Health Check Disabled

| | |
|--|--|
| Health Check Method |  Disabled |
| Health Check disabled. Network problem cannot be detected. | |

When **Disabled** is chosen in the **Method** field, the WAN connection will always be considered as up. The connection will **NOT** be treated as down in the event of IP routing errors.



Health Check Method: PING

| | |
|---------------------|---|
| Health Check Method |  PING |
| PING Hosts |  Host 1: <input type="text"/> Host 2: <input type="text"/> <input checked="" type="checkbox"/> Use first two DNS servers as PING Hosts |

ICMP ping packets will be issued to test the connectivity with a configurable target IP address or hostname. A WAN connection is considered as up if ping responses are received from either one or both of the ping hosts.

PING Hosts This setting specifies IP addresses or hostnames with which connectivity is to be tested via ICMP ping. If **Use first two DNS servers as Ping Hosts** is checked, the target ping host will be the first DNS server for the corresponding WAN connection. Reliable ping hosts with a high uptime should be considered. By default, the first two DNS servers of the WAN connection are used as the ping hosts.

Health Check Method: DNS Lookup

| | |
|--------------------------|--|
| Health Check Method |  DNS Lookup |
| Health Check DNS Servers |  Host 1: <input type="text"/> Host 2: <input type="text"/> <input checked="" type="checkbox"/> Use first two DNS servers as Health Check DNS Servers <input type="checkbox"/> Include public DNS servers |

DNS lookups will be issued to test connectivity with target DNS servers. The connection will be treated as up if DNS responses are received from one or both of the servers, regardless of whether the result was positive or negative.

**Health
Check DNS
Servers**

This field allows you to specify two DNS hosts' IP addresses with which connectivity is to be tested via DNS lookup.




If **Use first two DNS servers as Health Check DNS Servers** is checked, the first two DNS servers will be the DNS lookup targets for checking a connection's health. If the box is not checked, **Host 1** must be filled, while a value for **Host 2** is optional.

If **Include public DNS servers** is selected and no response is received from all specified DNS servers, DNS lookups will also be issued to some public DNS servers. A WAN connection will be treated as down only if there is also no response received from the public DNS servers.

Connections will be considered as up if DNS responses are received from any one of the health check DNS servers, regardless of a positive or negative result. By default, the first two DNS servers of the WAN connection are used as the health check DNS servers.

Health Check Method: HTTP

HTTP connections will be issued to test connectivity with configurable URLs and strings to match.





| | | |
|---------------------|---|---|
| Health Check Method |  | HTTP ▾ |
| URL 1 |  | http:// <input type="text"/> Matching String: <input type="checkbox"/> |
| URL 2 |  | http:// <input type="text"/> Matching String: <input type="checkbox"/> |

URL1 WAN Settings>WAN Edit>Health Check Settings>URL1

The URL will be retrieved when performing an HTTP health check. When **String to Match** is left blank, a health check will pass if the HTTP return code is between 200 and 299 (Note: HTTP redirection codes 301 or 302 are treated as failures). When **String to Match** is filled, a health check will pass if the HTTP return code is between 200 and 299 and if the HTTP response content contains the string.

URL 2 WAN Settings>WAN Edit>Health Check Settings>URL2

If **URL2** is also provided, a health check will pass if either one of the tests passed.


| | | |
|-----------------------|---|----------------|
| Timeout |  | 10 ▾ second(s) |
| Health Check Interval |  | 5 ▾ second(s) |
| Health Check Retries |  | 3 ▾ |
| Recovery Retries |  | 3 ▾ |

Other Health Check Settings






Timeout This setting specifies the timeout in seconds for ping/DNS lookup requests. The default timeout is **5 seconds**.

Health Check Interval This setting specifies the time interval in seconds between ping or DNS lookup requests. The default health check interval is **5 seconds**.

| | |
|-----------------------------|--|
| Health Check Retries | This setting specifies the number of consecutive ping/DNS lookup timeouts after which the Pepwave router will treat the corresponding WAN connection as down. Default health retries is set to 3 . Using the default Health Retries setting of 3 , the corresponding WAN connection will be treated as down after three consecutive timeouts. |
| Recovery Retries | This setting specifies the number of consecutive successful ping/DNS lookup responses that must be received before the Pepwave router treats a previously down WAN connection as up again. By default, Recover Retries is set to 3 . Using the default setting, a WAN connection that is treated as down will be considered as up again upon receiving three consecutive successful ping/DNS lookup responses. |

| | |
|---|--|
| Automatic Public DNS Server Check on DNS Test Failure | |
| <p>When the health check method is set to DNS Lookup and health checks fail, the Pepwave router will automatically perform DNS lookups on public DNS servers. If the tests are successful, the WAN may not be down, but rather the target DNS server malfunctioned. You will see the following warning message on the main page:</p> | |
| <div>  Failed to receive DNS response from the health-check DNS servers for WAN connection 3. But public DNS server lookup test via the WAN passed. So please check the DNS server settings. </div> | |

Bandwidth Allowance Monitoring

| Bandwidth Allowance Monitor | |
|-----------------------------|--|
| Bandwidth Allowance Monitor |  <input checked="" type="checkbox"/> Enable |
| Action |  Email notification is currently disabled. You can get notified when usage hits 75%/95% of monthly allowance by enabling Email Notification . <input checked="" type="checkbox"/> Disconnect when usage hits 100% of monthly allowance |
| Start Day |  On <input type="text" value="1st"/> of each month at 00:00 midnight |
| Monthly Allowance |  <input type="text"/> GB  |

| | |
|------------------------------------|---|
| Bandwidth Allowance Monitor | |
| Action | <p>If Email Notification is enabled, you will be notified by email when usage hits 75% and 95% of the monthly allowance.</p> <p>If Disconnect when usage hits 100% of monthly allowance is checked, this WAN connection will be disconnected automatically when the usage hits the monthly allowance. It will not resume connection unless this option has been turned off or the usage has been reset when a new billing cycle starts.</p> |
| Start Day | This option allows you to define which day of the month each billing cycle begins. |
| Monthly Allowance | This field is for defining the maximum bandwidth usage allowed for the WAN connection each month. |

Disclaimer

Due to different network protocol overheads and conversions, the amount of data reported by this Peplink device is not representative of actual billable data usage as metered by your network provider. Peplink disclaims any obligation or responsibility for any events arising from the use of the numbers shown here.

Additional Public IP address



Additional Public IP Settings

| | |
|------------------------|---|
| IP Address List | IP Address List represents the list of fixed Internet IP addresses assigned by the ISP in the event that more than one Internet IP address is assigned to this WAN connection. Enter the fixed Internet IP addresses and the corresponding subnet mask, and then click the Down Arrow button to populate IP address entries to the IP Address List . |
|------------------------|---|

Dynamic DNS Settings

Pepwave routers are capable of registering the domain name relationships to dynamic DNS service providers. Through registration with dynamic DNS service provider(s), the default public Internet IP address of each WAN connection can be associated with a host name. With dynamic DNS service enabled for a WAN connection, you can connect to your WAN's IP address from the external, even if its IP address is dynamic. You must register for an account from the listed dynamic DNS service providers before enabling this option.

If the WAN connection's IP address is a reserved private IP address (i.e., behind a NAT router), the public IP of each WAN will be automatically reported to the DNS service provider.

Either upon a change in IP addresses or every 23 days without link reconnection, the Pepwave router will connect to the dynamic DNS service provider to perform an IP address update within the provider's records.

The settings for dynamic DNS service provider(s) and the association of hostname(s) are configured via **Network>WAN>Details>Dynamic DNS Service Provider/Dynamic DNS Settings**.

| | |
|------------------------------|---|
| Dynamic DNS Service Provider | <input type="text" value="changeip.com"/> |
| User ID | <input type="text"/> |
| Password | <input type="password"/> |
| Confirm Password | <input type="password"/> |
| Hosts | <input type="text"/> |

Dynamic DNS Settings

Dynamic DNS This setting specifies the dynamic DNS service provider to be used for the WAN based on supported dynamic DNS service providers:

- Disabled
- changeip.com
- dyndns.org
- no-ip.org
- DNS-O-Matic
- Others...

Support custom Dynamic DNS servers by entering its URL. Works with any service compatible with DynDNS API.

Select **Disabled** to disable this feature.


**User ID/
Username /
Email** This setting specifies the registered user name for the dynamic DNS service.

Password This setting specifies the password for the dynamic DNS service.

Hosts This field allows you to specify a list of host names or domains to be associated with the public Internet IP address of the WAN connection. If you need to enter more than one host, use a carriage return to separate them.

Important Note

In order to use dynamic DNS services, appropriate host name registration(s) and a valid account with a supported dynamic DNS service provider are required. A dynamic DNS update is performed whenever a WAN's IP address changes (e.g., the IP is changed after a DHCP IP refresh, reconnection, etc.). Due to dynamic DNS service providers' policy, a dynamic DNS host will automatically expire if the host record has not been updated for a long time. Therefore the Pepwave router performs an update every 23 days, even if a WAN's IP address has not changed.

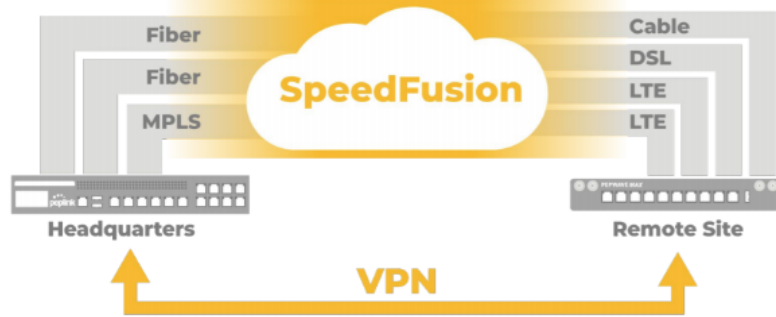

Pepwave bandwidth bonding SpeedFusion™ is our patented technology that enables our SD-WAN routers to bond multiple Internet connections to increase site-to-site bandwidth and reliability. SpeedFusion functionality securely connects your Pepwave router to another Pepwave or Peplink device (Peplink Balance 210/310/380/580/710/1350 only). Data, voice, or video communications between these locations are kept confidential across the public Internet.

Bandwidth bonding SpeedFusion™ is specifically designed for multi-WAN environments. In case of failures and network congestion at one or more WANs, other WANs can be used to continue carrying the network traffic.

Different models of our SD-WAN routers have different numbers of site-to-site connections allowed. End-users who need to have more site-to-site connections can purchase a SpeedFusion license to increase the number of site-to-site connections allowed.

Pepwave routers can aggregate all WAN connections' bandwidth for routing SpeedFusion™ traffic. Unless all the WAN connections of one site are down, Pepwave routers can keep the VPN up and running.

VPN bandwidth bonding is supported in Firmware 5.1 or above. All available bandwidth will be utilized to establish the VPN tunnel, and all traffic will be load balanced at packet level across all links. VPN bandwidth bonding is enabled by default.

SpeedFusion VPN

To configure SpeedFusion VPN, navigate to **Advanced > SpeedFusion VPN**.

SpeedFusion VPN

InControl management enabled. Settings can now be configured on [InControl](#).

| Profile | Remote ID | Remote Address(es) |
|------------------------------|-----------|--------------------|
| No VPN Connection Defined | | |
| <button>New Profile</button> | | |

Send All Traffic To
No SpeedFusion VPN profile selected

SpeedFusion VPN Local ID
Local ID

SpeedFusion VPN Settings
Link Failure Detection Time ☒ Recommended (Approx. 15 secs)
☐ Fast (Approx. 6 secs)
☐ Faster (Approx. 2 secs)
☐ Extreme (Under 1 sec)
Shorter detection time incurs more health checks and higher bandwidth overhead
Save

The local LAN subnet and subnets behind the LAN (defined under **Static Route** on the LAN settings page) will be advertised to the VPN. All VPN members (branch offices and headquarters) will be able to route to local subnets.

Note that all LAN subnets and the subnets behind them must be unique. Otherwise, VPN members will not be able to access each other.

All data can be routed over the VPN using the 256-bit AES encryption standard. To configure, navigate to **Advanced > SpeedFusion VPN** and click the **New Profile** button to create a new VPN profile (you may have to first save the displayed default profile in order to access the **New Profile** button). Each profile specifies the settings for making VPN connection with one remote Pepwave or Peplink device. Note that available settings vary by model.

A list of defined SpeedFusion connection profiles and a **Link Failure Detection Time** option will be shown. Click the **New Profile** button to create a new VPN connection profile for making a VPN connection to a remote Pepwave or Peplink device via the available WAN connections. Each profile is for making a VPN connection with one remote Pepwave or Peplink Device.

SpeedFusion VPN Profile

Name

Enable

☒

Encryption

☒ 256-bit AES

☐ OFF

Authentication

☒ Remote ID / Pre-shared Key

Remote ID / Pre-shared Key

Remote ID

Pre-shared Key

NAT Mode

☐

Remote IP Address / Host Names (Optional)

If this field is empty, this field on the remote unit must be filled

Cost

10

Data Port

☒ Auto

☐ Custom

Bandwidth Limit

☐

WAN Smoothing

Off

Forward Error Correction

Off

Receive Buffer

0

ms

Packet Fragmentation

☒ Always

☐ Use DF Flag

Use IP ToS

☐

Latency Difference Cutoff

500

ms

SpeedFusion VPN Profile Settings

| | |
|----------------|---|
| Name | This field is for specifying a name to represent this profile. The name can be any combination of alphanumeric characters (0-9, A-Z, a-z), underscores (_), dashes (-), and/or non-leading/trailing spaces (). |
| Enable | When this box is checked, this VPN connection profile will be enabled. Otherwise, it will be disabled. |
| Encryption | By default, VPN traffic is encrypted with 256-bit AES . If Off is selected on both sides of a VPN connection, no encryption will be applied. |
| Authentication | Select from By Remote ID Only , Preshared Key , or X.509 to specify the method the Pepwave MAX will use to authenticate peers. When selecting By Remote ID Only , be sure to enter a unique peer ID number in the Remote ID field. |

| | |
|--|--|
| Remote ID / Pre-shared Key | <p>This optional field becomes available when Remote ID / Pre-shared Key is selected as the Pepwave router's VPN Authentication method, as explained above. Pre-shared Key defines the pre-shared key used for this particular VPN connection. The VPN connection's session key will be further protected by the pre-shared key. The connection will be up only if the pre-shared keys on each side match. When the peer is running firmware 5.0+, this setting will be ignored.</p> <p>Enter Remote IDs either by typing out each Remote ID and Pre-shared Key, or by pasting a CSV. If you wish to paste a CSV, click the  icon next to the "Remote ID / Preshared Key" setting.</p> |
| Remote ID/Remote Certificate | <p>These optional fields become available when X.509 is selected as the Pepwave MAX's VPN authentication method, as explained above. To authenticate VPN connections using X.509 certificates, copy and paste certificate details into these fields. To get more information on a listed X.509 certificate, click the Show Details link below the field.</p> |
| Allow Shared Remote ID | <p>When this option is enabled, the router will allow multiple peers to run using the same remote ID.</p> |
| NAT Mode | <p>Check this box to allow the local DHCP server to assign an IP address to the remote peer. When NAT Mode is enabled, all remote traffic over the VPN will be tagged with the assigned IP address using network address translation.</p> |
| Remote IP Address / Host Names (Optional) | <p>If NAT Mode is not enabled, you can enter a remote peer's WAN IP address or hostname(s) here. If the remote uses more than one address, enter only one of them here. Multiple hostnames are allowed and can be separated by a space character or carriage return. Dynamic-DNS host names are also accepted.</p> <p>This field is optional. With this field filled, the Pepwave MAX will initiate connection to each of the remote IP addresses until it succeeds in making a connection. If the field is empty, the Pepwave MAX will wait for connection from the remote peer. Therefore, at least one of the two VPN peers must specify this value. Otherwise, VPN connections cannot be established.</p> |
| Cost | <p>Define path cost for this profile.</p> <p>OSPF will determine the best route through the network using the assigned cost.</p> <p>Default: 10</p> |
| Data Port | <p>This field is used to specify a UDP port number for transporting outgoing VPN data. If Default is selected, UDP port 4500 will be used. Port 32015 will be used if the remote unit uses Firmware prior to version 5.4 or if port 4500 is unavailable. If Custom is selected, enter an outgoing port number from 1 to 65535.</p> <p>Click the  icon to configure data stream using TCP protocol [EXPERIMENTAL].In the case TCP protocol is used, the exposed TCP session option can be authorised to work with TCP accelerated WAN link.</p> |
| Bandwidth Limit | <p>Define maximum download and upload speed to each individual peer. This functionality requires the peer to use SpeedFusion VPN version 4.0.0 or above.</p> |

| | |
|-----------------------------------|--|
| WAN Smoothing | <p>While using SpeedFusion VPN, utilize multiple WAN links to reduce the impact of packet loss and get the lowest possible latency at the expense of extra bandwidth consumption. This is suitable for streaming applications where the average bitrate requirement is much lower than the WAN's available bandwidth.</p> <p>Off – Disable WAN Smoothing.</p> <p>Normal – The total bandwidth consumption will be at most 2x of the original data traffic.</p> <p>Medium – The total bandwidth consumption will be at most 3x of the original data traffic.</p> <p>High – The total bandwidth consumption depends on the number of connected active tunnels.</p> |
| Forward Error Correction | <p>Forward Error Correction (FEC) can help to recover packet loss by using extra bandwidth to send redundant data packets. Higher FEC level will recover packets on a higher loss rate link.</p> <p>The expected overhead of Low is 13.3% and High is 26.7%.</p> <p>Require peer using SpeedFusion VPN version 8.0.0 and above.</p> |
| Receive Buffer | <p>Receive Buffer can help to reduce out-of-order packets and jitter, but will introduce extra latency to the tunnel. Default is 0 ms, which disables the buffer, and maximum buffer size is 2000 ms.</p> |
| Packet Fragmentation | <p>If the packet size is larger than the tunnel's MTU, it will be fragmented inside the tunnel in order to pass through.</p> <p>Select Always to fragment any packets that are too large to send, or Use DF Flag to only fragment packets with Don't Fragment bit cleared. This can be useful if your application does Path MTU Discovery, usually sending large packets with DF bit set, if allowing them to go through by fragmentation, the MTU will not be detected correctly.</p> |
| Use IP ToSA | <p>Checking this button enables the use of IP ToS header field.</p> |
| Latency Difference CutoffA | <p>Traffic will be stopped for links that exceed the specified millisecond value with respect to the lowest latency link. (e.g. Lowest latency is 100ms, a value of 500ms means links with latency 600ms or more will not be used)</p> |

A – Advanced feature, please click the  button on the top right-hand corner to activate.

To enable Layer 2 Bridging between SpeedFusion VPN profiles, navigate to **Network > LAN > Basic Settings > *LAN Profile Name*** and refer to instructions in section (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch-8-configuring-the-lan-interfaces/basic-settings/>) 8.1



| Traffic Distribution | | |
|------------------------------|---|----------------------------|
| Policy | ? | Dynamic Weighted Bonding ▼ |
| Congestion Latency Level | ? | Default ▼ |
| Ignore Packet Loss Event | ? | <input type="checkbox"/> |
| Disable Bufferbloat Handling | ? | <input type="checkbox"/> |
| Disable TCP ACK Optimization | ? | <input type="checkbox"/> |
| Packet Jitter Buffer | ? | 150 ms |

Traffic Distribution

Policy

This option allows you to select the desired out-bound traffic distribution policy:

- Bonding – Aggregate multiple WAN-to-WAN links into a single higher throughput tunnel.
- Dynamic Weighted Bonding – Aggregates WAN-to-WAN links with similar latencies.

By default, Bonding is selected as a traffic distribution policy.

Congestion Latency Level

For most WANs, especially on cellular networks, the latency will increase when the link becomes more congested.

Setting the **Congestion Latency Level** to **Low** will treat the link as congested more aggressively.

Setting it to **High** will allow the latency to increase more before treating it as congested.

Ignore Packet Loss Event

By default, when there is packet loss, it is considered as a congestion event. If this is not the case, select this option to ignore the packet loss event.

Disable Bufferbloat Handling

Bufferbloat is a phenomenon on the WAN side when it is congested. The latency can become very high due to buffering on the uplink. By default, the Dynamic Weighted Bonding policy will try its best to mitigate bufferbloat by reducing TCP throughput when the WAN is congested. However, as a side effect, the tunnel might not achieve maximum bandwidth.

Selecting this option will **disable** the bufferbloat handling mentioned above.

Disable TCP ACK Optimization

By default, TCP ACK will be forwarded to remote peers as fast as possible. This will consume more bandwidth, but may help to improve TCP performance as well.

Selecting this option will **disable** the TCP ACK optimization mentioned above.

Packet Jitter Buffer

The default jitter buffer is 150ms, and can be modified from 0ms to 500ms. The jitter buffer may increase the tunnel latency. If you want to keep the latency as low as possible, you can set it to 0ms to disable the buffer.

Note: If the Receive Buffer is set, the Packet Jitter Buffer will be automatically disabled.

| WAN Connection Priority ? | | | | | | |
|--|---------------|-----------|-------------------|----------------------|--|--|
| | Priority | Direction | Connect to Remote | Cut-off latency (ms) | Suspension Time after Packet Loss (ms) | |
| 1. WAN 1 | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |
| 2. WAN 2 | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |
| 3. Wi-Fi WAN | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |
| 4. Cellular 1 | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |
| 5. Cellular 2 | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |
| 6. USB | 1 (Highest) ▼ | Up/Down ▼ | All ▼ | | | |

WAN Connection Priority

WAN Connection Priority

If your device supports it, you can specify the priority of WAN connections to be used for making VPN connections. WAN connections set to **OFF** will never be used. Only available WAN connections with the highest priority will be used.


To enable asymmetric connections, connection mapping to remote WANs, cut-off latency, and packet loss suspension time, click the ? button.

Send All Traffic To

No SpeedFusion VPN profile selected



Send All Traffic To

This feature allows you to redirect all traffic to a specified SpeedFusion VPN connection. Click the  button to select your connection and the following menu will appear:

Send All Traffic

Send All Traffic To ?

☒ Balance 2942-1257-1241 ▼

DNS Server

8.8.8.8

8.8.4.4

☒ Backup Site Balance-4810-1825-068E-4810 ▼

DNS Server

8.8.8.8

8.8.4.4


You could also specify a DNS server to resolve incoming DNS requests. Click the checkbox next to **Backup Site** to designate a backup SpeedFusion profile that will take over, should the main SpeedFusion VPN connection fail.

Outbound Policy/SpeedFusion VPN Outbound Custom Rules

Some models allow you to set outbound policy and custom outbound rules from **Advanced>SpeedFusion VPN**. See **Section 14** for more information on outbound policy settings.


Outbound Policy

According to custom rules





PepVPN Outbound Custom Rules

| Service | Algorithm | Source | Destination | Protocol | |
|---------------------|-----------|--------|-------------|----------|--|
| (Auto) | | | | | |
| <div>Add Rule</div> | | | | | |



SpeedFusion VPN Local ID

Local ID  MAX-BR1-A712 

SpeedFusion VPN Local ID

The local ID is a text string to identify this local unit when establishing a VPN connection. When creating a profile on a remote unit, this local ID must be entered in the remote unit's

Remote ID field. Click the  icon to edit **Local ID**.



SpeedFusion VPN Settings 

Handshake Port ☒ Default ☐ Custom

Link Failure Detection Time  ☒ Recommended (Approx. 15 secs)
☐ Fast (Approx. 6 secs)
☐ Faster (Approx. 2 secs)
☐ Extreme (Under 1 sec)
Shorter detection time incurs more health checks and higher bandwidth overhead

SpeedFusion VPN Settings

Handshake PortA To designate a custom handshake port (TCP), click the **custom** radio button and enter the port number you wish to designate.

Link Failure Detection Time The bonded VPN can detect routing failures on the path between two sites over each WAN connection. Failed WAN connections will not be used to route VPN traffic. Health check packets are sent to the remote unit to detect any failure. The more frequently checks are sent, the shorter the detection time, although more bandwidth will be consumed.

When **Recommended** (default) is selected, a health check packet is sent every five seconds, and the expected detection time is 15 seconds.

When **Fast** is selected, a health check packet is sent every three seconds, and the expected detection time is six seconds.

When **Faster** is selected, a health check packet is sent every second, and the expected detection time is two seconds.

When **Extreme** is selected, a health check packet is sent every 0.1 second, and the expected detection time is less than one second.

A – Advanced feature, please click the  button on the top right-hand corner to activate.

Important Note

Peplink proprietary SpeedFusion™ uses TCP port 32015 and UDP port 4500 for establishing VPN connections. If you have a firewall in front of your Pepwave devices, you will need to add firewall rules for these ports and protocols to allow inbound and outbound traffic to pass through the firewall.

Tip

Want to know more about VPN sub-second session failover? Visit our YouTube Channel (<http://www.youtube.com/PeplinkChannel>) for a video tutorial!



<http://youtu.be/TLQgdpPSY88> (<http://youtu.be/TLQgdpPSY88>)

The Pepwave Router Behind a NAT Router

Pepwave routers support establishing SpeedFusion™ over WAN connections which are behind a NAT (network address translation) router.

To enable a WAN connection behind a NAT router to accept VPN connections, you can configure the NAT router in front of the WAN connection to inbound port-forward TCP port 32015 to the Pepwave router.

If one or more WAN connections on Unit A can accept VPN connections (by means of port forwarding or not), while none of the WAN connections on the peer Unit B can do so, you should enter all of Unit A's public IP addresses or hostnames into Unit B's **Remote IP Addresses / Host Names** field. Leave the field in Unit A blank. With this setting, a SpeedFusion™ connection can be set up and all WAN connections on both sides will be utilized.

See the following diagram for an example of this setup in use:



One of the WANs connected to Router A is non-NAT'd (212.1.1.1). The rest of the WANs connected to Router A and all WANs connected to Router B are NAT'd. In this case, the **Peer IP Addresses / Host Names** field for Router B should be filled with all of Router A's hostnames or public IP

addresses (i.e., 212.1.1.1, 212.2.2.2, and 212.3.3.3), and the field in Router A can be left blank. The two NAT routers on WAN1 and WAN3 connected to Router A should inbound port-forward TCP port 32015 to Router A so that all WANs will be utilized in establishing the VPN.

SpeedFusion VPN Status

SpeedFusion VPN status is shown in the Dashboard. The connection status of each connection profile is shown as below.

| SpeedFusion VPN | | Status |
|-----------------|---|-------------|
| To MK2 |  | Established |

After clicking the **Status** button at the top right corner of the SpeedFusionTM table, you will be forwarded to **Status > SpeedFusion VPN**, where you can view subnet and WAN connection information for each VPN peer.

IP Subnets Must Be Unique Among VPN Peers

The entire interconnected SpeedFusionTM network is a single non-NAT IP network. Avoid duplicating subnets in your sites to prevent connectivity problems when accessing those subnets.

Ch11. IPsec VPN

IPsec VPN functionality securely connects one or more branch offices to your company's main headquarters or to other branches. Data, voice, and video communications between these locations are kept safe and confidential across the public Internet.

IPsec VPN on Pepwave routers is specially designed for multi-WAN environments. For instance, if a user sets up multiple IPsec profiles for a multi-WAN environment and WAN1 is connected and healthy, IPsec traffic will go through this link. However, should unforeseen problems (e.g., unplugged cables or ISP problems) cause WAN1 to go down, our IPsec implementation will make use of WAN2 and WAN3 for failover.

IPsec VPN Settings

Many Pepwave products can make multiple IPsec VPN connections with Peplink, Pepwave, Cisco, and Juniper routers. Note that all LAN subnets and the subnets behind them must be unique. Otherwise, VPN members will not be able to access each other. All data can be routed over the VPN with a selection of encryption standards, such as 3DES, AES-128, and AES-256. To configure IPsec VPN on Pepwave devices that support it, navigate to **Advanced>IPsec VPN**.

| IPsec VPN Profiles | Remote Networks |
|--|-----------------|
| No IPsec VPN Profile Defined. | |
| <input type="button" value="New Profile"/> | |

Pepwave MAX IPsec only supports network-to-network connection with Cisco, Juniper or Pepwave MAX devices.

Click the **New Profile** button to create new IPsec VPN profiles that make VPN connections to remote Pepwave, Cisco, or Juniper routers via available WAN connections. To edit any of the profiles, click on its associated connection name in the leftmost column.

| IPsec VPN Profile | | | | | | | | |
|---------------------------------------|--|----------------------------------|---------|-------------|--|----------------------|---------------------|----------------------------------|
| Name | <input type="text"/> | | | | | | | |
| Active | <input checked="" type="checkbox"/> | | | | | | | |
| IKE Version | <input checked="" type="radio"/> IKEv1 <input type="radio"/> IKEv2 | | | | | | | |
| Connect Upon Disconnection of | <input checked="" type="checkbox"/> <input type="text" value="WAN 1"/> | | | | | | | |
| Remote Gateway IP Address / Host Name | <input type="text"/> | | | | | | | |
| IPsec Type | <input checked="" type="radio"/> Policy-based <input type="radio"/> Route-based | | | | | | | |
| Local Networks | <input checked="" type="checkbox"/> 192.168.50.0/24 <input type="checkbox"/> <input type="text"/> | | | | | | | |
| Remote Networks | <table border="1"> <thead> <tr> <th>Network</th> <th>Subnet Mask</th> <th></th> </tr> </thead> <tbody> <tr> <td><input type="text"/></td> <td>255.255.255.0 (/24)</td> <td><input type="button" value="+"/></td> </tr> </tbody> </table> | | Network | Subnet Mask | | <input type="text"/> | 255.255.255.0 (/24) | <input type="button" value="+"/> |
| Network | Subnet Mask | | | | | | | |
| <input type="text"/> | 255.255.255.0 (/24) | <input type="button" value="+"/> | | | | | | |
| Authentication | <input checked="" type="radio"/> Preshared Key <input type="radio"/> X.509 Certificate | | | | | | | |
| Mode | <input checked="" type="radio"/> Main Mode (All WANs need to have Static IP) <input type="radio"/> Aggressive Mode | | | | | | | |
| Force UDP Encapsulation | <input type="checkbox"/> | | | | | | | |
| Preshared Key | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters | | | | | | | |
| Local ID | <input type="text"/> | | | | | | | |
| Remote ID | <input type="text"/> | | | | | | | |
| Phase 1 (IKEv1) Proposal | 1 <input type="text" value="AES-CBC-256 & SHA1"/> 2 <input type="text" value="-----"/> | | | | | | | |
| Phase 1 DH Group | 1 <input type="text" value="Group 2"/> 2 <input type="text" value="-----"/> | | | | | | | |
| Phase 1 SA Lifetime | <input type="text" value="3600"/> seconds | | | | | | | |
| Phase 2 (ESP) Proposal | 1 <input type="text" value="AES-CBC-256 & SHA1"/> 2 <input type="text" value="-----"/> | | | | | | | |
| Phase 2 PFS Group | <input type="text" value="None"/> | | | | | | | |
| Phase 2 SA Lifetime | <input type="text" value="28800"/> seconds | | | | | | | |

IPsec VPN Profile Settings

Name This field is for specifying a local name to represent this connection profile.

Active When this box is checked, this IPsec VPN connection profile will be enabled. Otherwise, it will be disabled.

IKE Version Two versions of the IKE standards are available:

- IKEv1
- IKEv2

Connect Upon Disconnection of Check this box and select a WAN to connect to this VPN automatically when the specified WAN is disconnected.

Remote Gateway IP Address / Host Name Enter the remote peer's public IP address. For **Aggressive Mode**, this is optional.

| | |
|---|--|
| IPsec Type | <p>Policy-based – (default) All the matched traffic as defined in Local Networks and Remote Networks will be routed to this IPsec connection, this cannot be overridden by other routing methods.</p> <p>Route-based – Outbound Policy rule is required to route traffic to this tunnel and comes with more flexibility to control how to route traffic compared to Policy-based. If you want to modify the traffic selector instead of using the default (0.0.0.0/0).</p> <p>Note: This option is available for certain following models only:</p> <ul style="list-style-type: none"> MAX: BR1 ENT, Transit, 700 HW3 or above, HD2 HW5 or above, HD4 |
| Local Networks | <p>Enter the local LAN subnets here. If you have defined static routes, they will be shown here.</p> <p>Using NAT, you can map a specific local network / IP address to another, and the packets received by remote gateway will appear to be coming from the mapped network / IP address. This allow you to establish IPsec connection to a remote site that has one or more subnets overlapped with local site.</p> <p>Two types of NAT policies can be defined:</p> <p>One-to-One NAT policy: if the defined subnet in Local Network and NAT Network has the same size, for example, policy “192.168.50.0/24 > 172.16.1.0/24” will translate the local IP address 192.168.50.10 to 172.16.1.10 and 192.168.50.20 to 172.16.1.20. This is a bidirectional mapping which means clients in remote site can initiate connection to the local clients using the mapped address too.</p> <p>Many-to-One NAT policy: if the defined NAT Network on the right hand side is an IP address (or having a network prefix /32), for example, policy “192.168.1.0/24 > 172.168.50.1/32” will translate all clients in 192.168.1.0/24 network to 172.168.50.1. This is a unidirectional mapping which means clients in remote site will not be able to initiate connection to the local clients.</p> |
| Remote Networks | Enter the LAN and subnets that are located at the remote site here. |
| Authentication | To access your VPN, clients will need to authenticate by your choice of methods. Choose between the Preshared Key and X.509 Certificate methods of authentication. |
| Mode | Choose Main Mode if both IPsec peers use static IP addresses. Choose Aggressive Mode if one of the IPsec peers uses dynamic IP addresses. |
| Force UDP Encapsulation | For forced UDP encapsulation regardless of NAT-traversal, tick this checkbox. |
| Pre-shared Key | This defines the peer authentication pre-shared key used to authenticate this VPN connection. The connection will be up only if the pre-shared keys on each side match. |
| Remote Certificate (pem encoded) | Available only when X.509 Certificate is chosen as the Authentication method, this field allows you to paste a valid X.509 certificate. |
| Local ID | In Main Mode , this field can be left blank. In Aggressive Mode , if Remote Gateway IP Address is filled on this end and the peer end, this field can be left blank. Otherwise, this field is typically a U-FQDN. |

| | |
|-------------------------------|--|
| Remote ID | In Main Mode , this field can be left blank. In Aggressive Mode , if Remote Gateway IP Address is filled on this end and the peer end, this field can be left blank. Otherwise, this field is typically a U-FQDN. |
| Phase 1 (IKE) Proposal | In Main Mode , this allows setting up to six encryption standards, in descending order of priority, to be used in initial connection key negotiations. In Aggressive Mode , only one selection is permitted. |
| Phase 1 DH Group | <p>This is the Diffie-Hellman group used within IKE. This allows two parties to establish a shared secret over an insecure communications channel. The larger the group number, the higher the security.</p> <p>Group 2: 1024-bit is the default value.</p> <p>Group 5: 1536-bit is the alternative option.</p> |
| Phase 1 SA Lifetime | This setting specifies the lifetime limit of this Phase 1 Security Association. By default, it is set at 3600 seconds. |
| Phase 2 (ESP) Proposal | In Main Mode , this allows setting up to six encryption standards, in descending order of priority, to be used for the IP data that is being transferred. In Aggressive Mode , only one selection is permitted. |
| Phase 2 PFS Group | <p>Perfect forward secrecy (PFS) ensures that if a key was compromised, the attacker will be able to access only the data protected by that key.</p> <p>None – Do not request for PFS when initiating connection. However, since there is no valid reason to refuse PFS, the system will allow the connection to use PFS if requested by the remote peer. This is the default value.</p> <p>Group 2: 1024-bit Diffie-Hellman group. The larger the group number, the higher the security.</p> <p>Group 5: 1536-bit is the third option.</p> |
| Phase 2 SA Lifetime | This setting specifies the lifetime limit of this Phase 2 Security Association. By default, it is set at 28800 seconds. |

| WAN Connection Priority | |
|-------------------------|---------------|
| Priority | WAN Selection |
| 1 | WAN 1 ▾ |
| 2 | ***** ▾ |

| WAN Connection Priority | |
|-------------------------|--|
| WAN Connection | Select the appropriate WAN connection from the drop-down menu. |

GRE Tunnel

Generic Routing Encapsulation (GRE) is a tunneling protocol that can encapsulate a wide variety of network layer protocols inside virtual point-to-point links over an Internet Protocol network. A GRE tunnel is similar to IPSec or SpeedFusion VPN.

To configure a GRE Tunnel, navigate to **Advanced > GRE Tunnel**.

| | |
|----------------------------|------------------------|
| GRE Tunnel Profiles | Remote Networks |
| No GRE profile defined | |
| New Profile | |

Click the **New Profile** button to create new GRE tunnel profiles that establish tunnel connections to remote tunnel endpoints via available WAN connections. To edit the profiles, click on its associated connection name in the leftmost column.

GRE Tunnel Profile

Name

Active

☒

Remote GRE IP Address

Tunnel Local IP Address

Tunnel Remote IP Address

Tunnel Subnet Mask

☒ Auto

☐ 255.255.255.0 (/24)

Connection

WAN

Remote Networks

| Network | Subnet Mask | |
|---------|---------------------|------------------------------------|
| | 255.255.255.0 (/24) | <div><div></div><div>+</div></div> |

Save

Cancel

GRE Tunnel Profile Settings

| | |
|---------------------------------|---|
| Name | This field is for specifying a name to represent this GRE Tunnel connection profile. |
| Active | When this box is checked, this GRE Tunnel connection profile will be enabled. Otherwise, it will be disabled. |
| Remote GRE IP Address | This field is for entering the remote GRE's IP address |
| Tunnel Local IP Address | This field is for specifying the tunnel source IP address. |
| Tunnel Remote IP Address | This field is for specifying the tunnel destination IP address |
| Tunnel Subnet Mask | This field is to select the subnet mask that is to be used for the GRE tunnel. |
| Connection | Select the appropriate WAN connection from the drop-down menu. |
| Remote Networks | Input the LAN and subnets that are located at the remote site here. |

Ch12. OpenVPN

OpenVPN is a site to site VPN mode that can encapsulate a wide variety of network layer protocols inside virtual point-to-point links over an Internet Protocol network.

To configure a OpenVPN, navigate to **Advanced > OpenVPN** and click the **New Profile**.

OpenVPN Profile Settings

Name

Active

☒

OpenVPN Profile



Choose a file or drag it here

server:
protocol: port:

Login Credential (Optional)

Username:

Password:

☒ Hide Characters

Connection

WAN 1

Save

Cancel

OpenVPN Profile Settings

| | |
|------------------------------------|---|
| Name | This field is for specifying a name to represent this OpenVPN profile. |
| Active | When this box is checked, this OpenVPN connection profile will be enabled. Otherwise, it will be disabled. |
| OpenVPN Profile | Upload the OpenVPN configuration (.ovpn) file from your service provider. |
| Login Credential (Optional) | This option is an optional for you to enter the username and password to login for the OpenVPN connection if the profile need to login. |
| Connection | Select the appropriate WAN connection from the drop-down menu. |

Ch13. Outbound Policy


Pepwave routers can flexibly manage and load balance outbound traffic among WAN connections.



Important Note


Outbound policy is applied only when more than one WAN connection is active.


The settings for managing and load balancing outbound traffic are located at

Advanced > Outbound Policy.

Outbound Policy  Drag and drop rows by the left to change rule order

| Service | Algorithm | Source | Destination | Protocol / Port | |
|---|--------------------------|--------|-------------|-----------------|---|
| SpeedFusion VPN / OSPF / BGP / RIPv2 Routes | | | | | |
|  HTTPS Persistence | Persistence (Src) (Auto) | Any | Any | TCP 443 |  |
| Default | (Auto) | | | | |
| <div>Add Rule</div> | | | | | |

Expert Mode 

Enabled 

Adding Rules for Outbound Policy

The menu underneath enables you to define Outbound policy rules:

| Outbound Policy (? Drag and drop rows by the left to change rule order) ? | | | | | |
|--|--------------------------|--------|-------------|-----------------|--------------|
| Service | Algorithm | Source | Destination | Protocol / Port | |
| SpeedFusion VPN / OSPF / BGP / RIPv2 Routes | | | | | |
| ⋮ <u>HTTPS Persistence</u> | Persistence (Src) (Auto) | Any | Any | TCP 443 | <div>✖</div> |
| Default | (Auto) | | | | |
| <div>Add Rule</div> | | | | | |

The bottom-most rule is **Default**. Edit this rule to change the device's default manner of controlling outbound traffic for all connections that do not match any of the rules above it. Under the **Service** heading, click **Default** to change these settings.

To rearrange the priority of outbound rules, drag and drop them into the desired sequence.

Edit Default Custom Rule ?

| | |
|-------------------------------------|---|
| Default Rule ? | <input checked="" type="radio"/> Custom <input type="radio"/> Auto |
| Algorithm ? | Weighted Balance ▾ |
| Load Distribution Weight ? | <div>WAN 1 10 <input type="range"/></div> <div>WAN 2 10 <input type="range"/></div> <div>WAN 3 10 <input type="range"/></div> <div>WAN 4 10 <input type="range"/></div> <div>WAN 5 10 <input type="range"/></div> <div>Mobile Internet 10 <input type="range"/></div> |
| When No Connections are Available ? | <div>Drop the Traffic ▾</div> <div>Drop the Traffic</div> <div>Use Any Available Connections</div> |

Save Cancel

By default, **Auto** is selected as the **Default Rule**. You can select **Custom** to change the algorithm to be used. Please refer to the upcoming sections for the details on the available algorithms.

To create a custom rule, click **Add Rule** at the bottom of the table.

Add a New Custom Rule

| | | | |
|-----------------------------------|--|----------------------------|---------------------------|
| Service Name | | | |
| Enable | <input checked="" type="checkbox"/> Always on | | |
| Source | Any | | |
| Destination | IP Network | | Mask: 255.255.255.0 (/24) |
| Protocol | Any | ← :: Protocol Selection :: | |
| Algorithm | Weighted Balance | | |
| Load Distribution Weight | <div> <div>WAN 1 10</div> <div>WAN 2 10</div> <div>WAN 3 10</div> <div>WAN 4 10</div> <div>WAN 5 10</div> <div>Mobile Internet 10</div> </div> | | |
| When No Connections are Available | Drop the Traffic | | |

Save
Cancel

New Custom Rule Settings

Service Name This setting specifies the name of the outbound traffic rule.

Enable This setting specifies whether the outbound traffic rule takes effect. When **Enable** is checked, the rule takes effect: traffic is matched and actions are taken by the Pepwave router based on the other parameters of the rule. When **Enable** is unchecked, the rule does not take effect: the Pepwave router disregards the other parameters of the rule.

Click the drop-down menu next to the checkbox to apply a time schedule to this custom rule.

Source This setting specifies the source IP Address, IP Network, MAC Address or Grouped Network for traffic that matches the rule.

| | | |
|-------------|---|--------------------------|
| Source | ? | Any |
| Destination | ? | Any |
| Protocol | ? | IP Address |
| Algorithm | ? | IP Network |
| | | MAC Address |
| | | Client Type |
| | | Client's Associated SSID |

Destination This setting specifies the destination IP address, IP network, Domain name, SpeedFusion Cloud, SpeedFusion VPN Profile or Grouped network for traffic that matches the rule.



If **Domain Name** is chosen and a domain name, such as *foobar.com*, is entered, any outgoing accesses to *foobar.com* and **.foobar.com* will match this criterion. You may enter a wildcard (.) at the end of a domain name to match any host with a name having the domain name in the middle. If you enter *foobar.**, for example, *www.foobar.com*, *www.foobar.co.jp*, or *foobar.co.uk* will also match. Placing wildcards in any other position is not supported.

Note: if a server has one Internet IP address and multiple server names, and if one of the names is defined here, access to any one of the server names will also match this rule.

Protocol and Port This setting specifies the IP protocol and port of traffic that matches this rule. Via a drop-down menu, the following protocols can be specified:

- Any
- TCP
- UDP
- IP
- DSCP

Alternatively, the **Protocol Selection Tool** drop-down menu can be used to automatically fill in the protocol and port number of common Internet services (e.g., HTTP, HTTPS, etc.) After selecting an item from the **Protocol Selection Tool** drop-down menu, the protocol and port number remains manually modifiable.

Algorithm This setting specifies the behavior of the Pepwave router for the custom rule.

One of the following values can be selected (Note that some Pepwave routers provide only some of these options):

- Weighted Balance
- Persistence
- Enforced
- Priority
- Overflow
- Least Used
- Lowest Latency
- Fastest Response Time

For a full explanation of each Algorithm, please see the following article:

<https://forum.peplink.com/t/exactly-how-do-peplinks-load-balancing-algorithmns-work/8059> (<https://forum.peplink.com/t/exactly-how-do-peplinks-load-balancing-algorithmns-work/8059>)

| | |
|--|---|
| Load Distribution Weight | This is to define the outbound traffic weight ratio for each WAN connection. |
| When No connections are available | <p>This field allows you to configure the default action when all the selected Connections are not available.</p> <p>Drop the Traffic – Traffic will be discarded.</p> <p>Use Any Available Connections – Traffic will be routed to any available Connection, even it is not selected in the list.</p> <p>Fall-through to Next Rule – Traffic will continue to match the next Outbound Policy rule just like this rule is inactive.</p> |
| Terminate Sessions on Connection Recovery | This setting specifies whether to terminate existing IP sessions on a less preferred WAN connection in the event that a more preferred WAN connection is recovered. This setting is applicable to the Priority algorithms. By default, this setting is disabled. In this case, existing IP sessions will not be terminated or affected when any other WAN connection is recovered. When this setting is enabled, existing IP sessions may be terminated when another WAN connection is recovered, such that only the preferred healthy WAN connection(s) is used at any point in time. |

Algorithm: Weighted Balance

This setting specifies the ratio of WAN connection usage to be applied on the specified IP protocol and port. This setting is applicable only when **Algorithm** is set to **Weighted Balance**.

The screenshot shows a configuration window for the 'Weighted Balance' algorithm. On the left, there is a sidebar with 'Algorithm' and 'Load Distribution Weight' both set to 'Weighted Balance'. The main area displays six sliders, each representing a different WAN connection type, all of which are currently set to a value of 10. The sliders are labeled: WAN 1, WAN 2, Wi-Fi WAN, Cellular 1, Cellular 2, and USB.

| Connection Type | Weight |
|-----------------|--------|
| WAN 1 | 10 |
| WAN 2 | 10 |
| Wi-Fi WAN | 10 |
| Cellular 1 | 10 |
| Cellular 2 | 10 |
| USB | 10 |

The amount of matching traffic that is distributed to a WAN connection is proportional to the weight of the WAN connection relative to the total weight. Use the sliders to change each WAN's weight.

For example, with the following weight settings:

- Ethernet WAN1: 10
- Ethernet WAN2: 10
- Wi-Fi WAN: 10
- Cellular 1: 10
- Cellular 2: 10
- USB: 10

Total weight is 60 = (10 + 10 + 10 + 10 + 10 + 10).

Matching traffic distributed to Ethernet WAN1 is 16.7% = (10 / 60 x 100%).

Matching traffic distributed to Ethernet WAN2 is 16.7% = (10 / 60) x 100%.

Matching traffic distributed to Wi-Fi WAN is 16.7% = (10 / 60) x 100%.

Matching traffic distributed to Cellular 1 is 16.7% = (10 / 60) x 100%.

Matching traffic distributed to Cellular 2 is 16.7% = (10 / 60) x 100%.

Matching traffic distributed to USB is 16.7% = (10 / 60) x 100%.

Algorithm: Persistence

The configuration of persistent services is the solution to the few situations where link load distribution for Internet services is undesirable. For example, for security reasons, many e-banking and other secure websites terminate the session when the client computer's Internet IP address changes mid-session.

In general, different Internet IP addresses represent different computers. The security concern is that an IP address change during a session may be the result of an unauthorized intrusion attempt. Therefore, to prevent damages from the potential intrusion, the session is terminated upon the detection of an IP address change.

Pepwave routers can be configured to distribute data traffic across multiple WAN connections. Also, the Internet IP depends on the WAN connections over which communication actually takes place. As a result, a LAN client computer behind the Pepwave router may communicate using multiple Internet IP addresses. For example, a LAN client computer behind a Pepwave router with three WAN connections may communicate on the Internet using three different IP addresses.

With the persistence feature, rules can be configured to enable client computers to persistently utilize the same WAN connections for e-banking and other secure websites. As a result, a client computer will communicate using one IP address, eliminating the issues mentioned above.

| | |
|--------------------------|---|
| Algorithm | <input type="text" value="Persistence"/> |
| Persistence Mode | <input checked="" type="radio"/> By Source <input type="radio"/> By Destination |
| Load Distribution | <input type="radio"/> Auto <input checked="" type="radio"/> Custom |
| Load Distribution Weight | <div>WAN 1 10</div> <div>WAN 2 10</div> <div>Wi-Fi WAN 10</div> <div>Cellular 1 10</div> <div>Cellular 2 10</div> <div>USB 10</div> |

There are two persistent modes: **By Source** and **By Destination**.

By Source: The same WAN connection will be used for traffic matching the rule and originating from the same machine, regardless of its destination. This option will provide the highest level of application compatibility.

By Destination: The same WAN connection will be used for traffic matching the rule, originating from the same machine, and going to the same destination. This option can better distribute loads to WAN connections when there are only a few client machines.

The default mode is **By Source**. When there are multiple client requests, they can be distributed (persistently) to WAN connections with a weight. If you choose **Auto** in **Load Distribution**, the weights will be automatically adjusted according to each WAN's **Downstream Bandwidth** which is specified in the WAN settings page). If you choose **Custom**, you can customize the weight of each

WAN manually by using the sliders.

Algorithm: Enforced

This setting specifies the WAN connection usage to be applied on the specified IP protocol and port. This setting is applicable only when **Algorithm** is set to **Enforced**.

| | | |
|---------------------|---|-------------|
| Algorithm | ? | Enforced |
| Enforced Connection | ? | WAN: WAN 1 |
| | | Save Cancel |

WAN: WAN 1
WAN: WAN 2
WAN: Wi-Fi WAN
WAN: Cellular 1
WAN: Cellular 2
WAN: USB
VPN: Connection 1

Matching traffic will be routed through the specified WAN connection, regardless of the health check status of the WAN connection. Starting from Firmware 5.2, outbound traffic can be enforced to go through a specified SpeedFusion™ connection.

Algorithm: Priority

This setting specifies the priority of the WAN connections used to route the specified network service. The highest priority WAN connection available will always be used for routing the specified type of traffic. A lower priority WAN connection will be used only when all higher priority connections have become unavailable.

| Algorithm | ? | Priority | | | | | | | | | | | | | | | | | | | | |
|---|------------|--|------------------|------------|----------|--|-----------------|--|-----------------|--|----------|--|-------------------|--|----------------|--|----------------|--|--------------------|--|-----------------|--|
| Priority Order | ? | <table border="1"><thead><tr><th>Highest Priority</th><th>Not In Use</th></tr></thead><tbody><tr><td>WAN: WAN</td><td></td></tr><tr><td>WAN: Cellular 1</td><td></td></tr><tr><td>WAN: Cellular 2</td><td></td></tr><tr><td>WAN: USB</td><td></td></tr><tr><td>WAN: LAN 1 as WAN</td><td></td></tr><tr><td>WAN: GRE WAN 1</td><td></td></tr><tr><td>WAN: GRE WAN 2</td><td></td></tr><tr><td>WAN: OpenVPN WAN 1</td><td></td></tr><tr><td>Lowest Priority</td><td></td></tr></tbody></table> | Highest Priority | Not In Use | WAN: WAN | | WAN: Cellular 1 | | WAN: Cellular 2 | | WAN: USB | | WAN: LAN 1 as WAN | | WAN: GRE WAN 1 | | WAN: GRE WAN 2 | | WAN: OpenVPN WAN 1 | | Lowest Priority | |
| Highest Priority | Not In Use | | | | | | | | | | | | | | | | | | | | | |
| WAN: WAN | | | | | | | | | | | | | | | | | | | | | | |
| WAN: Cellular 1 | | | | | | | | | | | | | | | | | | | | | | |
| WAN: Cellular 2 | | | | | | | | | | | | | | | | | | | | | | |
| WAN: USB | | | | | | | | | | | | | | | | | | | | | | |
| WAN: LAN 1 as WAN | | | | | | | | | | | | | | | | | | | | | | |
| WAN: GRE WAN 1 | | | | | | | | | | | | | | | | | | | | | | |
| WAN: GRE WAN 2 | | | | | | | | | | | | | | | | | | | | | | |
| WAN: OpenVPN WAN 1 | | | | | | | | | | | | | | | | | | | | | | |
| Lowest Priority | | | | | | | | | | | | | | | | | | | | | | |
| When No Connections are Available | ? | Drop the Traffic | | | | | | | | | | | | | | | | | | | | |
| Terminate Sessions on Connection Recovery | ? | <input type="checkbox"/> Enable | | | | | | | | | | | | | | | | | | | | |

Starting from Firmware 5.2, outbound traffic can be prioritized to go through SpeedFusion™ connection(s). By default, VPN connections are not included in the priority list.

Tip

Configure multiple distribution rules to accommodate different kinds of services.

Algorithm: Overflow

The traffic matching this rule will be routed through the healthy WAN connection that has the highest priority and is not in full load. When this connection gets saturated, new sessions will be routed to the next healthy WAN connection that is not in full load.

| | | |
|----------------|---|--|
| Algorithm | ? | Overflow |
| Overflow Order | ? | <div>Highest Priority</div> <div><input checked="" type="checkbox"/> WAN: WAN 1</div> <div><input checked="" type="checkbox"/> WAN: WAN 2</div> <div><input checked="" type="checkbox"/> WAN: Wi-Fi WAN</div> <div><input checked="" type="checkbox"/> WAN: Cellular 1</div> <div><input checked="" type="checkbox"/> WAN: Cellular 2</div> <div><input checked="" type="checkbox"/> WAN: USB</div> <div>Lowest Priority</div> |

Drag and drop to specify the order of WAN connections to be used for routing traffic. Only the highest priority healthy connection that is not in full load will be used.

Algorithm: Least Used

| | | |
|------------|---|--|
| Algorithm | ? | Least Used |
| Connection | | <div><input checked="" type="checkbox"/> WAN 1</div> <div><input checked="" type="checkbox"/> WAN 2</div> <div><input checked="" type="checkbox"/> Wi-Fi WAN</div> <div><input type="checkbox"/> Cellular 1</div> <div><input type="checkbox"/> Cellular 2</div> <div><input type="checkbox"/> USB</div> |

The traffic matching this rule will be routed through the healthy WAN connection that is selected in **Connection** and has the most available download bandwidth. The available download bandwidth of a WAN connection is calculated from the total download bandwidth specified on the WAN settings page and the current download usage. The available bandwidth and WAN selection is determined every time an IP session is made.

Algorithm: Lowest Latency

| | | |
|------------|---|--|
| Algorithm | ? | Lowest Latency |
| | | Note: Use of Lowest Latency will incur additional network usage. |
| Connection | | <div><input checked="" type="checkbox"/> WAN 1</div> <div><input checked="" type="checkbox"/> WAN 2</div> <div><input checked="" type="checkbox"/> Wi-Fi WAN</div> <div><input type="checkbox"/> Cellular 1</div> <div><input type="checkbox"/> Cellular 2</div> <div><input type="checkbox"/> USB</div> |

The traffic matching this rule will be routed through the healthy WAN connection that is selected in **Connection** and has the lowest latency. Latency checking packets are issued periodically to a nearby router of each WAN connection to determine its latency value. The latency of a WAN is the packet round trip time of the WAN connection. Additional network usage may be incurred as a result.

Tip

The roundtrip time of a 6M down/640k uplink can be higher than that of a 2M down/2M up link because the overall round trip time is lengthened by its slower upload bandwidth, despite its higher downlink speed. Therefore, this algorithm is good for two scenarios:

- All WAN connections are symmetric; or
- A latency sensitive application must be routed through the lowest latency WAN, regardless of the WAN's available bandwidth.

Expert Mode

Expert Mode is available on some Pepwave routers for use by advanced users. To enable the feature, click on the help icon and click **turn on Expert Mode**.

In Expert Mode, a new special rule, **SpeedFusion™ Routes**, is displayed in the **Custom Rules** table. This rule represents all SpeedFusion™ routes learned from remote VPN peers. By default, this bar is on the top of all custom rules. This position means that traffic for remote VPN subnets will be routed to the corresponding VPN peer. You can create custom **Priority** or **Enforced** rules and move them

above the bar to override the SpeedFusion™ routes.

Upon disabling Expert Mode, all rules above the bar will be removed.



Ch14. Port Forwarding

Pepwave routers can act as a firewall that blocks, by default, all inbound access from the Internet. By using port forwarding, Internet users can access servers behind the Pepwave router. Inbound port forwarding rules can be defined at **Advanced > Port Forwarding**.

| Service | IP Address(es) | Server | Protocol |
|---------------------|----------------|--------|----------|
| No Services Defined | | | |
| Add Service | | | |

To define a new service, click **Add Service**.

Port Forwarding

Enable

☒

Service Name

Protocol

TCP ← :: Protocol Selection ::

Port

Any Port

Inbound IP Address(es)
(Require at least one IP address)

?

Connection / IP Address(es)

All

Clear

☐ WAN

☐ Cellular

☐ Wi-Fi WAN on 2.4 GHz

☐ Wi-Fi WAN on 5 GHz

☐ SpeedFusion VPN

Server IP Address

?

Save

Cancel

Port Forwarding Settings

| | |
|---------------------|---|
| Enable | This setting specifies whether the inbound service takes effect. When Enable is checked, the inbound service takes effect: traffic is matched and actions are taken by the Pepwave router based on the other parameters of the rule. When this setting is disabled, the inbound service does not take effect: the Pepwave router disregards the other parameters of the rule. |
| Service Name | This setting identifies the service to the system administrator. Valid values for this setting consist of only alphanumeric and underscore "_" characters. |
| Protocol | The IP Protocol setting, along with the Port setting, specifies the protocol of the service as TCP, UDP, ICMP, or IP. Traffic that is received by the Pepwave router via the specified protocol at the specified port(s) is forwarded to the LAN hosts specified by the Servers setting. Please see below for details on the Port and Servers settings. Alternatively, the Protocol Selection Tool drop-down menu can be used to automatically fill in the protocol and a single port number of common Internet services (e.g. HTTP, HTTPS, etc.). After selecting an item from the Protocol Selection Tool drop-down menu, the protocol and port number remain manually modifiable. |

Port The **Port** setting specifies the port(s) that correspond to the service, and can be configured to behave in one of the following manners:

Any Port, Single Port, Port Range, Port Map, and Range Mapping

Port?Any Port

Any Port: all traffic that is received by the Pepwave router via the specified protocol is forwarded to the servers specified by the **Servers** setting. For example, with **IP Protocol** set to **TCP**, and **Port** set to **Any Port**, all TCP traffic is forwarded to the configured servers.

Port?Single PortService Port: 80

Single Port: traffic that is received by the Pepwave router via the specified protocol at the specified port is forwarded via the same port to the servers specified by the **Servers** setting. For example, with **IP Protocol** set to **TCP**, and **Port** set to **Single Port** and **Service Port** 80, TCP traffic received on port 80 is forwarded to the configured servers via port 80.

Port?Port RangeService Ports: 80 - 88

Port Range: traffic that is received by the Pepwave router via the specified protocol at the specified port range is forwarded via the same respective ports to the LAN hosts specified by the **Servers** setting. For example, with **IP Protocol** set to **TCP**, and **Port** set to **Port Range** and **Service Ports** 80-88, TCP traffic received on ports 80 through 88 is forwarded to the configured servers via the respective ports.

Port?Port MappingService Port: 80Map to Port: 88

Port Mapping: traffic that is received by Pepwave router via the specified protocol at the specified port is forwarded via a different port to the servers specified by the **Servers** setting.

For example, with **IP Protocol** set to **TCP**, and **Port** set to **Port Mapping**, **Service Port** 80, and **Map to Port** 88, TCP traffic on port 80 is forwarded to the configured servers via port 88.

(Please see below for details on the **Servers** setting.)

Port?Range MappingService Ports: 80 - 88Map to Ports: 88 - 96

Range Mapping: traffic that is received by the Pepwave router via the specified protocol at the specified port range is forwarded via a different port to the servers specified by the **Servers** setting.

Inbound IP Address(es) This setting specifies the WAN connections and Internet IP address(es) from which the service can be accessed.

Server IP Address This setting specifies the LAN IP address of the server that handles the requests for the service.

UPnP / NAT-PMP Settings

UPnP and NAT-PMP are network protocols which allow a computer connected to the LAN port to automatically configure the router to allow parties on the WAN port to connect to itself. That way, the process of inbound port forwarding becomes automated.

When a computer creates a rule using these protocols, the specified TCP/UDP port of all WAN connections’ default IP address will be forwarded.


Check the corresponding box(es) to enable UPnP and/or NAT-PMP. Enable these features only if you trust the computers connected to the LAN ports.




When the options are enabled, a table listing all the forwarded ports under these two protocols can be found at **Status > UPnP / NAT-PMP**.

Ch15. NAT Mappings

NAT mappings allow IP address mapping of all inbound and outbound NAT'd traffic to and from an internal client IP address. Settings to configure NAT mappings are located at **Advanced > NAT Mappings**.



To add a rule for NAT mappings, click **Add NAT Rule**.

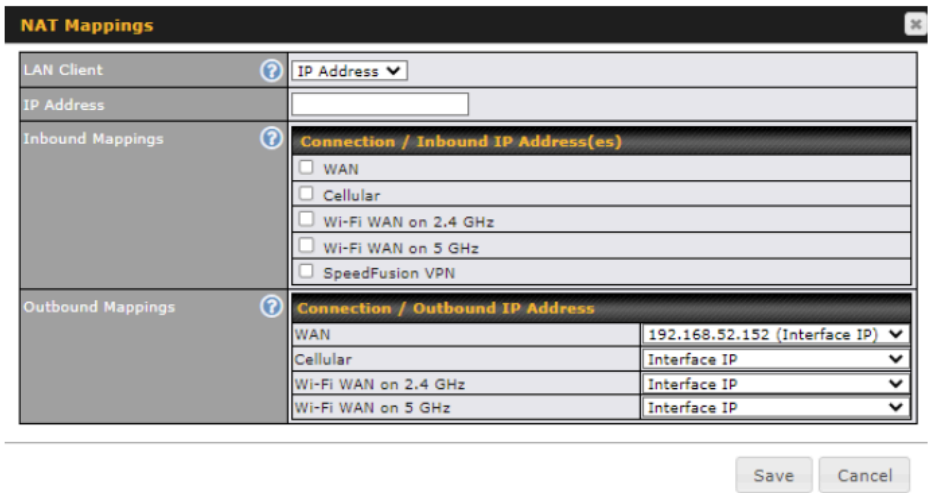

NAT Mapping Settings

LAN Client NAT mapping rules can be defined for a single LAN **IP Address**, an **IP Range**, or an **IP Network**.

IP Address This refers to the LAN host’s private IP address. The system maps this address to a number of public IP addresses (specified below) in order to facilitate inbound and outbound traffic. This option is only available when **IP Address** is selected.

| | |
|--------------------------|---|
| IP Range | The IP range is a contiguous group of private IP addresses used by the LAN host. The system maps these addresses to a number of public IP addresses (specified below) to facilitate outbound traffic. This option is only available when IP Range is selected. |
| IP Network | The IP network refers to all private IP addresses and ranges managed by the LAN host. The system maps these addresses to a number of public IP addresses (specified below) to facilitate outbound traffic. This option is only available when IP Network is selected. |
| Inbound Mappings | <p>This setting specifies the WAN connections and corresponding WAN-specific Internet IP addresses on which the system should bind. Any access to the specified WAN connection(s) and IP address(es) will be forwarded to the LAN host. This option is only available when IP Address is selected in the LAN Client(s) field.</p> <p>Note that: inbound mapping is not needed for WAN connections in drop-in mode or IP forwarding mode. Also note that each WAN IP address can be associated to one NAT mapping only.</p> |
| Outbound Mappings | <p>This setting specifies the WAN IP addresses that should be used when an IP connection is made from a LAN host to the Internet. Each LAN host in an IP range or IP network will be evenly mapped to one of each selected WAN's IP addresses (for better IP address utilization) in a persistent manner (for better application compatibility).</p> <p>Note that: if you do not want to use a specific WAN for outgoing accesses, you should still choose default here, then customize the outbound access rule in the Outbound Policy section. Also note that WAN connections in drop-in mode or IP forwarding mode are not shown here.</p> |

Click **Save** to save the settings when configuration has been completed.

Important Note

Inbound firewall rules override the **Inbound Mappings** settings.

Ch16. MediaFast

MediaFast settings can be configured from the **Advanced** menu.

Setting Up MediaFast Content Caching

To access MediaFast content caching settings, select **Advanced > Cache Control**

MediaFast

Enable ☐

Domains / IP Addresses ☐ Cache all ☐ Whitelist ☒ Blacklist

Source IP Subnet ☒ Any ☐ Custom

MediaFast

| | |
|-------------------------------|--|
| Enable | Click the checkbox to enable MediaFast content caching. |
| Domains / IP Addresses | Choose to Cache on all domains , or enter domain names and then choose either Whitelist (cache the specified domains only) or Blacklist (do not cache the specified domains). |
| Source IP Subnet | This setting allows caching to be enabled on custom subnets only. If "Any" is selected, then caching will apply to all subnets. |

Secure Content Caching

Enable ☐ Note: Please enable MediaFast for Secure Content Caching

Domains / IP Addresses ☐ Cache all ☒ Whitelist ☐ Blacklist

googlevideo.com
youtube.com

Source IP Subnet ☒ Any ☐ Custom

The **Secure Content Caching** menu operates identically to the **MediaFast** menu, except it is for secure content caching accessible through https://.

In order for Mediafast devices to cache and deliver HTTPS content, every client needs to have the necessary certificates installed*.

*See <https://forum.peplink.com/t/certificate-installation-for-mediafast-https-caching/> (<https://forum.peplink.com/t/certificate-installation-for-mediafast-https-caching/>)

Cache Control

Content Type ☒ Video ☒ Audio ☒ Images ☒ OS / Application Updates

Cache Lifetime Settings File Extension Lifetime (days)

Cache Control

| | |
|--------------------------------|--|
| Content Type | Check these boxes to cache the listed content types or leave boxes unchecked to disable caching for the listed types. |
| Cache Lifetime Settings | Enter a file extension, such as JPG or DOC. Then enter a lifetime in days to specify how long files with that extension will be cached. Add or delete entries using the controls on the right. |

Viewing MediaFast Statistics

To get details on storage and bandwidth usage, select **Status > MediaFast**.



Prefetch Schedule

Content prefetching allows you to download content on a schedule that you define, which can help to preserve network bandwidth during busy times and keep costs down. To access MediaFast content prefetching settings, select **Advanced > Prefetch Schedule**.

| Prefetch Schedule | | | | | | | |
|----------------------------------|-------------|---------------|---------------|---------------|--------|---------------|---------|
| Name | Status | Next Run Time | Last Run Time | Last Duration | Result | Last Download | Actions |
| ▶ Course Progress | Downloading | 04-11 06:00 | 04-09 02:03 | - | | 0 B | |
| ▶ National Geog | Ready | 04-11 00:00 | 04-09 00:00 | 00:01 | | 4.98 kB | |
| ▶ Syllabus | Downloading | 04-11 06:00 | 04-09 06:00 | - | | 0 B | |
| ▶ Vimeo | Ready | 04-11 00:00 | 04-09 02:03 | 00:01 | | 115.91 kB | |
| ▶ ted | Ready | 04-11 00:00 | 04-09 00:00 | 00:01 | | 62.26 kB | |
| New Schedule | | | | | | | |
| Tools | | | | | | | |
| Clear Web Cache Clear Statistics | | | | | | | |

| | |
|------------------------------------|--|
| Name | This field displays the name given to the scheduled download. |
| Status | Check the status of your scheduled download here. |
| Next Run Time/Last Run Time | These fields display the date and time of the next and most recent occurrences of the scheduled download. |
| Last Duration | Check this field to ensure that the most recent download took as long as expected to complete. A value that is too low might indicate an incomplete download or incorrectly specified download target, while a value that is too long could mean a download with an incorrectly specified target or stop time. |
| Result | This field indicates whether downloads are in progress () or complete (). |
| Last Download | Check this field to ensure that the most recent download file size is within the expected range. A value that is too low might indicate an incomplete download or incorrectly specified download target, while a value that is too long could mean a download with an incorrectly specified target or stop time. This field is also useful for quickly seeing which downloads are consuming the most storage space. |
| Actions | <p>To begin a scheduled download immediately, click  .</p> <p>To cancel a scheduled download, click  .</p> <p>To edit a scheduled download, click  .</p> <p>To delete a scheduled download, click  .</p> |
| New Schedule | <p>Click to begin creating a new scheduled download. Clicking the button will cause the following screen to appear:</p>  <p>Simply provide the requested information to create your schedule.</p> |
| Clear Web Cache | To clear all cached content, click this button. Note that this action cannot be undone. |
| Clear Statistics | To clear all prefetch and status page statistics, click this button. |

Ch17. Edge Computing

ContentHub allow you to deliver webpages and applications to user connected to the SSID using the local storage on your router,like the Max HD2/HD4 with Mediafast, which can store up to 8GB of media. Users will be able to access news, articles, videos, and access your web app without the need for internet access.

The ContentHub can be used to provide infotainment to connected users on transport.

Configuring the ContentHub

ContentHub storage needs to be configured before content can be uploaded to the ContentHub. Click on the link on the information panel to configure storage.

ContentHub storage has not been configured. Click [here](#) to review storage configuration

To access ContentHub, navigate to **Advanced > ContentHub** and check the **Enable** box.

| ContentHub | | | | | | |
|--|--------|-------------|--------------|--------------|--------|---------|
| Enable <input checked="" type="checkbox"/> ? <button>Save</button> | | | | | | |
| Schedule | | | | | | |
| Websites | Source | Next Update | Last Updated | Elapsed Time | Status | Actions |
| No Schedule | | | | | | |
| <button>New Website</button> | | | | | | |

On an external server, configure content (a website or application) that will be synced to the ContentHub. For example, an html5 website.

To configure a website or application as content, follow the steps below.

Configure a website for ContentHub

This option allows you to sync a website to the Pepwave router. This website will then be published with the specified domain from the router itself and makes the content available to the client via the HTTP/HTTPS protocol.

Only FTP sync is supported for this type of ContentHub content.

The content should be uploaded to an FTP server before you sync it with ContentHub.

Click **New Website** and a window with the following configuration options will appear:

Schedule

| | |
|-----------------|--|
| Active | <input checked="" type="checkbox"/> |
| Type | <input checked="" type="radio"/> Website <input type="radio"/> Application |
| Protocol | HTTP |
| Domain/Path | http:// |
| Source | ftp Username: Password: |
| Period | Everyday From 00 : 00 to 01 : 00 |
| Bandwidth Limit | 0 Gbps (0: Unlimited) |

Save & Apply Now
Cancel

Schedule

| | |
|------------------------|---|
| Active | Checking the box toggles the activation of the content. |
| Type | Select the type of content: Website or Application. |
| Protocol | Configure the protocol to be used: HTTP, HTTPS or both. |
| Domain/Path | Enter the URL for the ContentHub to use as the domain name for client access (such as http://mytest.com). |
| Method | Only applicable for Application type content. Choose between sync or file upload. |
| Source | Enter the details of the server that the content will be downloaded from. Enter credentials under Username and Password . |
| Period | This field determines how often the router will search for updates to the source content. |
| Bandwidth Limit | Set a bandwidth limit for clients. |


Click “**Save & Apply Now**” to activate the changes. A screenshot of the display after configuration is shown below:

Schedule

| Websites | Source | Next Update | Last Updated | Elapsed Time | Status | Actions |
|-------------------|--------------------------|-------------|--------------|--------------|--------|---------|
| http://mytest.com | | | | | | + |
| /(root) | ftp://10.8.76.254/web... | - | - | - | | + - |

New Website

The content will be synced regularly according to the time set in the **Period** that was configured earlier.

If you want to activate the sync manually, you can click the “” icon. The “Status” column will display the sync progress. When the sync is completed, a summary will be displayed, as shown in the screenshot below:

| Schedule | | | | | | | |
|---------------------|--------------------------|-------------|--------------|--------------|--------|--|--|
| Websites | Source | Next Update | Last Updated | Elapsed Time | Status | Actions | |
| ▼ http://mytest.com | | | | | | | |
| /(root) | ftp://10.8.76.254/web... | - | 05-23 03:41 | 00:00:11 | ✓ | <div><div><div><div></div></div><div><div></div></div><div><div></div></div></div><div><div></div><div></div><div></div></div></div> | |
| New Website | | | | | | Status details Close | |
| | | | | | | Completed +1 / 0 / -0 files | |

To access the content, open a browser in the MFA's client and enter the domain details that were configured earlier (such as http://mytest.com (http://mytest.com)).

Configure an application for ContentHub

MediaFast routers allow you to configure and publish any application from the router itself by using one of the supported frameworks below:

- Python (version 2.7.12)
- Ruby (version 2.3.3)
- Node.js (version 6.9.2)

Install the desired framework under “Package Manager” as shown below:

PEPWAVE
Dashboard
SpeedFusion Cloud
Network
Advanced
AP
System
Status
Apply Changes

System
Admin Security
Firmware
Time
Schedule
Email Notification
Event Log
SNMP
InControl
Configuration
Feature Add-ons
Reboot

Tools
Ping
Traceroute
Wake-on-LAN
WAN Analysis
Storage Manager
Package Manager

(Last Update: Tue May 23 04:02:36 UTC 2017)

Package List
Update All

| | |
|--|--|
| Node.js Version: 6.9.2 (17178) Size: 8.99 MB Date: Fri Feb 24 07:45:28 UTC 2017 | |
| Python Version: 2.7.12 (17178) Size: 20.29 MB Date: Fri Feb 24 07:45:28 UTC 2017 | |
| Ruby Version: 2.3.3 (17178) Size: 31.44 MB Date: Fri Feb 24 07:45:30 UTC 2017 | |

After installing the framework, change the “Type” to “Application” and configure the website.

Schedule

| | |
|-----------------|--|
| Active | <input checked="" type="checkbox"/> |
| Type | <input type="radio"/> Website <input checked="" type="radio"/> Application |
| Protocol | HTTP |
| Domain | http:// |
| Method | <input checked="" type="radio"/> Sync <input type="radio"/> File Upload |
| Source | <div>ftp ://</div> <div>Username:</div> <div>Password:</div> |
| Period | <div>Everyday</div> <div>From 00:00 to 01:00</div> |
| Bandwidth Limit | 0 Gbps (0: Unlimited) |

Save & Apply Now

Cancel

The setting is the same as the Website type (refer to the description in the section above).

Application type content need to be packed as explained below:

1. Implement two bash script files, start.sh and stop.sh in the root folder, to start and stop your application. The MediaFast router will only execute start.sh and stop.sh when the corresponding website is enabled and disabled respectively.
2. Compress the application files and the bash script to .tar.gz format.
3. Upload this tar file to the router.

Ch18. Docker

MediaFast enabled routers can host Docker containers when running Firmware 7.1 or later.

Docker is an open platform for developing, shipping, and running applications.

From Firmware version 7.1.0 and upwards, it is possible to install and run Docker Containers on your Pepwave routers with MediaFast, such as the MAX HD2 and the MAX HD4.

Due to the nature of Docker and its unlimited variables, this feature is supported by Pepwave up to the point of creating a running Docker Container.

Information about Docker can be found on the Docker Documentation site:

<https://docs.docker.com/> 2

This will allow you to run a file sharing platform (ownCloud), a web server (WordPress, Joomla!) , a learning platform (Moodle), or a visualisation tool for viewing large scale data (Kibana).

When creating a new Docker Container, the Pepwave router will search through the Docker Hub repository. <https://hub.docker.com/explore/> 7

For detailed configuration instructions, refer to our knowledge base:

Ch19. KVM

MediaFast enabled routers now support KVM. Users will have to download and install Virtual Machine Manager to manage the KVM virtual machines. Through this, users are able to virtualise a Linux environment.



For detailed configuration instructions, refer to our knowledge base articles:

1. **How to install a Virtual Machine on Peplink/Pepwave – MediaFast/ContentHub Routers** (<https://forum.peplink.com/t/how-to-install-a-virtual-machine-on-peplinkpepwave-mediafastcontenthub-routers/615d563606128ac0b42e68b7>)
2. **How to Install Virtual Machine with USB storage on Peplink/Pepwave – MediaFast/ContentHub Routers** (<https://forum.peplink.com/t/how-to-install-virtual-machine-with-usb-storage-on-peplinkpepwave-mediafastcontenthub-routers/615d4a7e76a4d461fde5cc4c>)

Ch20. QoS

User Groups (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/user-groups/>)

Bandwidth Control (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/bandwidth-control/>)

Application Queue (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/application-queue/>)

Application (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/application/>)

User Groups

Other than the three default user groups, you can add more user groups by entering the group name into the column and clicking the '+' button. The user group limit is up to 10.

User Group

User Group

| | |
|----------|---|
| Name | |
| Manager | × |
| Staff | × |
| Guest | × |
| Group#4 | × |
| Group#5 | × |
| Group#6 | × |
| Group#7 | × |
| Group#8 | × |
| Group#9 | × |
| Group#10 | × |
| | + |

Save

Bandwidth Control

This section is to define how much minimum bandwidth will be reserved to each user group when a WAN connection is **in full load**. When this feature is enabled, a slider with two indicators will be shown. You can move the indicators to adjust each group's weighting. The lower part of the table shows the corresponding reserved download and uploads bandwidth value of each connection.

By default, **50%** of bandwidth has been reserved for Manager, **30%** for Staff, and **20%** for Guest.

Group Bandwidth Reservation

Enable

☒

| | Manager | Staff | Guest |
|-------------|---------------|---------------|---------------|
| Bandwidth % | 50% | 30% | 20% |
| WAN 1 | 500.0M/500.0M | 300.0M/300.0M | 200.0M/200.0M |
| WAN 2 | 500.0M/500.0M | 300.0M/300.0M | 200.0M/200.0M |

You can define a maximum download speed (over all WAN connections) and upload speed (for each WAN connection) that each individual Staff and Guest member can consume. No limit can be imposed on individual Managers. By default, download and upload bandwidth limits are set to unlimited (set as **0**).

Individual Bandwidth Limit

Enable

☒

| User Bandwidth Limit | Download | Upload |
|----------------------|-----------|-----------------------|
| Manager | Unlimited | Unlimited |
| Staff | 0 Mbps | 0 Mbps (0: Unlimited) |
| Guest | 0 Mbps | 0 Mbps (0: Unlimited) |

Application Queue

This section is to define the QoS Application Queue. You can set guaranteed bandwidth for a queue and assign it to applications.

QoS Application Queue

No Application Queue Defined

Add

Click the Add button to create the QoS Application Queue.

A dialog box titled "Add Queue" with a close button in the top right corner. It contains three rows of settings. The first row is "Name" with a text input field. The second row is "Bandwidth" with a help icon, two checkboxes for "Upload" and "Download", and two "Mbps" dropdown menus. The third row is "Borrow Spare Bandwidth" with a help icon and a checkbox. At the bottom right are "Save" and "Cancel" buttons.

| Add Queue | |
|------------------------|---|
| Name | <input type="text"/> |
| Bandwidth | <input type="checkbox"/> Upload <input type="text"/> Mbps <input type="checkbox"/> Download <input type="text"/> Mbps |
| Borrow Spare Bandwidth | <input type="checkbox"/> |

Save Cancel

Add Queue

| | |
|------------------------|---|
| Name | This setting specifies a name for the QoS Application Queue. |
| Bandwidth | Bandwidth to be reserved (for each WAN connection) for this queue. When WAN is congested, this bandwidth will remain available for applications assigned to this queue. |
| Borrow Spare Bandwidth | Enable this option if you want this queue to utilize WAN's unused bandwidth. |

Application

Application Prioritization (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/application/application-prioritization/>)

Prioritization for Custom Applications (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/application/prioritization-for-custom-applications/>)

DSL/Cable Optimization (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch20-qos/application/dsl-cable-optimization/>)

Application Prioritization

On many Pepwave routers, you can choose whether to apply the same prioritization settings to all user groups or customize the settings for each group.


A dialog box titled "Application Prioritization" with a help icon in the top right corner. It contains two radio button options: "Apply same settings to all users" (which is selected) and "Customize".

| Application Prioritization | |
|---|--|
| <input checked="" type="radio"/> Apply same settings to all users | |
| <input type="radio"/> Customize | |

Three application priority levels can be set: **↑High**, **— Normal**, and **↓Low**. Pepwave routers can detect various application traffic types by inspecting the packet content. Select an application by choosing a supported application, or by defining a custom application manually. The priority preference of supported applications is placed at the top of the table. Custom applications are at the bottom.

| Application | Manager | Staff | Guest | |
|--------------------------------------|----------|----------|----------|---|
| All Supported Streaming Applications | ↑ High ✓ | ↑ High ✓ | ↑ High ✓ | ✗ |
| All Database Applications | ↑ High ✓ | ↑ High ✓ | ↑ High ✓ | ✗ |
| Add | | | | |

Prioritization for Custom Applications

Click the **Add** button to define a custom application. Click the button  in the **Action** column to delete the custom application in the corresponding row.

When **Supported Applications** is selected, the Pepwave router will inspect network traffic and prioritize the selected applications. Alternatively, you can select **Custom Applications** and define the application by providing the protocol, scope, port number, and DSCP value.

Add / Edit Application

| | |
|-------------|---|
| Type | <input checked="" type="radio"/> Supported Applications <input type="radio"/> Custom Applications |
| Category | Email |
| Application | All Email Protocols |

OK
 Cancel

DSL/Cable Optimization

DSL/cable-based WAN connections have lower upload bandwidth and higher download bandwidth. When a DSL/cable circuit's uplink is congested, the download bandwidth will be affected. Users will not be able to download data at full speed until the uplink becomes less congested. **DSL/Cable Optimization** can relieve such an issue. When it is enabled, the download speed will become less affected by the upload traffic. By default, this feature is disabled.

DSL/Cable Optimization

| | |
|--------|--------------------------|
| Enable | <input type="checkbox"/> |
|--------|--------------------------|

SpeedFusion VPN Traffic Optimization

To enable this option to allow SpeedFusion VPN traffic has highest priority when WAN is congested.

SpeedFusion VPN Traffic Optimization

| | |
|--------|--------------------------|
| Enable | <input type="checkbox"/> |
|--------|--------------------------|

Ch21. Firewall

A firewall is a mechanism that selectively filters data traffic between the WAN side (the Internet) and the LAN side of the network. It can protect the local network from potential hacker attacks, access to offensive websites, and/or other inappropriate uses.

The firewall functionality of Pepwave routers supports the selective filtering of data traffic in both directions:

- Outbound (LAN to WAN)
- Inbound (WAN to LAN)
- Internal Network (VLAN to VLAN)
- Local Service

The firewall also supports the following functionality:

- Intrusion detection and DoS prevention
- Web blocking

With SpeedFusion™ enabled, the firewall rules also apply to VPN tunneled traffic.

Outbound Firewall Rules (🖱️ Drag and drop rows by the left to change rule order) ?

| Rule | Protocol | Source | Destination | Action | |
|---------------------|----------|--------|-------------|--------|--|
| Default | Any | Any | Any | ✓ | |
| <div>Add Rule</div> | | | | | |

Inbound Firewall Rules (🖱️ Drag and drop rows by the left to change rule order) ?

| Rule | Protocol | WAN | Source | Destination | Action | |
|---------------------|----------|-----|--------|-------------|--------|--|
| Default | Any | Any | Any | Any | ✓ | |
| <div>Add Rule</div> | | | | | | |

Internal Network Firewall Rules (🖱️ Drag and drop rows by the left to change rule order) ?

| Rule | Protocol | Source | Destination | Action | |
|---------------------|----------|--------|-------------|--------|--|
| Default | Any | Any | Any | ✓ | |
| <div>Add Rule</div> | | | | | |

Intrusion Detection and DoS Prevention ?

Disabled

Local Service Firewall Rules (🖱️ Drag and drop rows by the left to change rule order)

| Rule | Service | WAN | Source | Action | |
|---------------------|---------|-----|--------|--------|--|
| Default | Any | Any | Any | ✓ | |
| <div>Add Rule</div> | | | | | |

Access Rules

Outbound Firewall Rules

The outbound firewall settings are located at **Advanced > Firewall > Access Rules**.

| Outbound Firewall Rules (Drag and drop rows by the left to change rule order) | | | | | | ? |
|--|----------|--------|-------------|--------|--|---|
| Rule | Protocol | Source | Destination | Action | | |
| test | Any | Any | Any | | | |
| Default | Any | Any | Any | | | |
| Add Rule | | | | | | |

To enable or disable the Outbound Firewall to manage device local network traffic, click on the help icon and click here, the screen will show below.

| Outbound Firewall Rules (Drag and drop rows by the left to change rule order) | | | | | | ? |
|--|----------|--------|-------------|--------|--|---|
| Rule | Protocol | Source | Destination | Action | | |
| ⚠ Device local network traffic is now managed by Outbound Firewall Rules | | | | | | |
| test | Any | | | | | |
| test1 | Any | | | | | |
| Default | Any | Any | Any | | | |
| Add Rule | | | | | | |

Note

To utilize the Outbound Firewall Rule to block the Peplink device from contacting InControl 2. may refer to the link below:

<https://forum.peplink.com/t/faq-prevent-device-reaching-incontrol-2./63f48fd466df34ab475f55/> (<https://forum.peplink.com/t/faq-prevent-device-reaching-incontrol-2./63f48fd466df34ab475f55/>)

Click **Add Rule** to display the following screen:

Add a New Internal Network Firewall Rule

| | |
|---------------|---|
| Rule Name | |
| Enable | <input checked="" type="checkbox"/> Always on |
| Protocol | Any Protocol Selection :: |
| Source | Any Address |
| Destination | Any Address |
| Action | <input checked="" type="radio"/> Allow <input type="radio"/> Deny |
| Event Logging | <input type="checkbox"/> Enable |

Save
Cancel

Inbound Firewall Rules

Inbound firewall settings are located at **Advanced > Firewall > Access Rules**.

| Inbound Firewall Rules (Drag and drop rows by the left to change rule order) | | | | | | ? |
|---|----------|-----|--------|-------------|--------|---|
| Rule | Protocol | WAN | Source | Destination | Action | |
| test | Any | Any | Any | Any | | |
| Default | Any | Any | Any | Any | | |
| Add Rule | | | | | | |

Click **Add Rule** to display the following screen:

Add a New Inbound Firewall Rule

New Firewall Rule

| | |
|-----------------------|---|
| Rule Name | <input type="text"/> |
| Enable | <input checked="" type="checkbox"/> |
| WAN Connection | <input type="text" value="Any"/> |
| Protocol | <input type="text" value="Any"/> <input type="button" value="Protocol Selection Tool"/> |
| Source IP & Port | <input type="text" value="Any Address"/> |
| Destination IP & Port | <input type="text" value="Any Address"/> |
| Action | <input checked="" type="radio"/> Allow <input type="radio"/> Deny |
| Event Logging | <input type="checkbox"/> Enable |

Save
Cancel

Internal Network Firewall Rules

Internal Network firewall settings are located at **Advanced > Firewall > Access Rules**.

| Rule | Protocol | Source | Destination | Action | |
|---------|----------|--------|-------------|-------------------------------------|--------------------------|
| test | Any | Any | Any | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Default | Any | Any | Any | <input checked="" type="checkbox"/> | |

Add Rule

Click **Add Rule** to display the following window:

Add a New Internal Network Firewall Rule

New Firewall Rule

| | |
|---------------|--|
| Rule Name | <input type="text"/> |
| Enable | <input checked="" type="checkbox"/> Always on |
| Protocol | <input type="text" value="Any"/> <input type="button" value="Protocol Selection"/> |
| Source | <input type="text" value="Any Address"/> |
| Destination | <input type="text" value="Any Address"/> |
| Action | <input checked="" type="radio"/> Allow <input type="radio"/> Deny |
| Event Logging | <input type="checkbox"/> Enable |

Save
Cancel

Inbound / Outbound / Internal Network Firewall Settings

Rule Name This setting specifies a name for the firewall rule.

Enable This setting specifies whether the firewall rule should take effect. If the box is checked, the firewall rule takes effect. If the traffic matches the specified protocol/IP/port, actions will be taken by the Pepwave router based on the other parameters of the rule. If the box is not checked, the firewall rule does not take effect. The Pepwave router will disregard the other parameters of the rule.

Click the dropdown menu next to the checkbox to place this firewall rule on a time schedule.

WAN Connection (Inbound) Select the WAN connection that this firewall rule should apply to.

| | |
|-----------------|---|
| Protocol | <p>This setting specifies the protocol to be matched. Via a drop-down menu, the following protocols can be specified:</p> <ul style="list-style-type: none">◦ Any◦ TCP◦ UDP◦ ICMP◦ DSCP◦ IP <p>Alternatively, the Protocol Selection Tool drop-down menu can be used to automatically fill in the protocol and port number of common Internet services (e.g., HTTP, HTTPS, etc.)</p> <p>After selecting an item from the Protocol Selection Tool drop-down menu, the protocol and port number remains manually modifiable.</p> |
|-----------------|---|

| | |
|-----------------------------|--|
| Source IP & Port | <p>This specifies the source IP address(es) and port number(s) to be matched for the firewall rule. A single address, or a network, can be specified as the Source IP & Port setting, as indicated by the following screenshot:</p>  <p>In addition, a single port, or a range of ports, can be specified for the Source IP & Port settings.</p> |
|-----------------------------|--|

| | |
|----------------------------------|---|
| Destination IP & Port | <p>This specifies the destination IP address(es) and port number(s) to be matched for the firewall rule. A single address, or a network, can be specified as the Destination IP & Port setting, as indicated by the following screenshot:</p>  <p>In addition, a single port, or a range of ports, can be specified for the Destination IP & Port settings.</p> |
|----------------------------------|---|

| | |
|---------------|---|
| Action | <p>This setting specifies the action to be taken by the router upon encountering traffic that matches the both of the following:</p> <ul style="list-style-type: none">◦ Source IP & port◦ Destination IP & port <p>With the value of Allow for the Action setting, the matching traffic passes through the router (to be routed to the destination). If the value of the Action setting is set to Deny, the matching traffic does not pass through the router (and is discarded).</p> |
|---------------|---|

Event Logging

This setting specifies whether or not to log matched firewall events. The logged messages are shown on the page **Status>Event Log**. A sample message is as follows:

Aug 13 23:47:44 Denied CONN=Ethernet WAN SRC=20.3.2.1
DST=192.168.1.20 LEN=48 PROTO=TCP SPT=2260 DPT=80


- **CONN:** The connection where the log entry refers to
- **SRC:** Source IP address
- **DST:** Destination IP address
- **LEN:** Packet length
- **PROTO:** Protocol
- **SPT:** Source port
- **DPT:** Destination port

Click **Save** to store your changes. To create an additional firewall rule, click **Add Rule** and repeat the above steps.

To change a rule's priority, simply drag and drop the rule:

- Hold the left mouse button on the rule.
- Move it to the desired position.
- Drop it by releasing the mouse button.




To remove a rule, click the  button.


Rules are matched from top to bottom. If a connection matches any one of the upper rules, the matching process will stop. If none of the rules match, the **Default** rule will be applied. By default, the **Default** rule is set as **Allow** for Outbound, Inbound and Internal Network access.

Tip

If the default inbound rule is set to **Allow** for NAT-enabled WANs, no inbound Allow firewall rules will be required for inbound port forwarding and inbound NAT mapping rules. However, if the default inbound rule is set as **Deny**, a corresponding Allow firewall rule will be required.

Intrusion Detection and DoS Prevention



Pepwave routers can detect and prevent intrusions and denial-of-service (DoS) attacks from the Internet. To turn on this feature, click , check the **Enable** check box, and press the **Save**

button.

When this feature is enabled, the Pepwave router will detect and prevent the following kinds of intrusions and denial-of-service attacks.

- Port scan
 - NMAP FIN/URG/PSH
 - Xmas tree
 - Another Xmas tree
 - Null scan
 - SYN/RST
 - SYN/FIN
- SYN flood prevention
- Ping flood attack prevention

Local Service Firewall Rules

For every WAN inbound traffic to local service, rules will be matched to take the defined action. The Local Service firewall settings are located at **Advanced > Firewall > Access Rules**.

| Local Service Firewall Rules (⚡ Drag and drop rows by the left to change rule order) ? | | | | | |
|--|---------|-----|--------|--------|--|
| Rule | Service | WAN | Source | Action | |
| Default | Any | Any | Any | ✓ | |
| Add Rule | | | | | |

Click **Add Rule** to display the following window:

Local Service Firewall Rule

| | |
|----------------|---|
| Rule Name | <input type="text"/> |
| Enable | <input checked="" type="checkbox"/> |
| Service ? | Any |
| WAN Connection | Any |
| Source | Any |
| Action | <input checked="" type="radio"/> Allow <input type="radio"/> Deny |
| Event Logging | <input type="checkbox"/> |

SaveCancel

Local Service Firewall Settings

Rule Name This setting specifies a name for the firewall rule.

Enable This setting specifies whether the firewall rule should take effect.

If the box is checked, the firewall rule takes effect. If the traffic matches the specified protocol/IP/port, actions will be taken by Peplink Balance based on the other parameters of the rule.

If the box is not checked, the firewall rule does not take effect. The Peplink Balance will disregard the other parameters of the rule.

Click the dropdown menu next to the checkbox to place this firewall rule on a time schedule.

| | |
|----------------|---|
| Service | This option allows you to define the supported local service to be matched. |
|----------------|---|

If Any is chosen, the firewall rule will match to all supported local services from the list.

Via a drop-down menu, the following services can be specified:

- Any
- SpeedFusion / PepVPN Handshake
- SpeedFusion / PepVPN Data Port
- Web Admin Access
- DNS Server
- SNMP Server
- KVM Management Port
- KVM VNC Port
- FusionSIM Agent / Remote SIM Proxy

| | |
|-----------------------|--|
| WAN Connection | Select the WAN connection that this firewall rule should apply to. |
| Source | This specifies the source IP address and IP Network to be matched for the firewall rule. |
| Action | With the value of Allow for the Action setting, the matching traffic passes through the router (to be routed to the destination). If the value of the Action setting is set to Deny , the matching traffic does not pass through the router (and is discarded). |
| Event Logging | <p>This setting specifies whether or not to log matched firewall events. The logged messages are shown on the page Status>Event Log. A sample message is as follows:</p> <p>Aug 13 23:47:44 Denied CONN=Ethernet WAN SRC=20.3.2.1 DST=192.168.1.20 LEN=48 PROTO=TCP SPT=2260 DPT=80</p> <ul style="list-style-type: none">◦ CONN: The connection where the log entry refers to◦ SRC: Source IP address◦ DST: Destination IP address◦ LEN: Packet length◦ PROTO: Protocol◦ SPT: Source port◦ DPT: Destination port |

Content Blocking

Application Blocking

Please Select Application...

Web Blocking

Preset Category

☐ High
☐ Moderate
☐ Low
☒ Custom

☐ Adware
☐ P2P/File sharing
☐ Audio-Video
☐ Pornography
☐ File Hosting
☐ Update Sites

Content Filtering Database Auto Update ☐

Customized Domains

Exempted Domains from Web Blocking

Exempted User Groups

| | |
|---------|---------------------------------|
| Manager | <input type="checkbox"/> Exempt |
| Staff | <input type="checkbox"/> Exempt |
| Guest | <input type="checkbox"/> Exempt |

Exempted Subnets

| Network | Subnet Mask |
|---------|---------------------|
| | 255.255.255.0 (/24) |

Save

Application Blocking

Choose applications to be blocked from LAN/PPTP/SpeedFusion VPN peer clients' access, except for those on the Exempted User Groups or Exempted Subnets defined below.

Web Blocking

Defines website domain names to be blocked from LAN/PPTP/SpeedFusion VPN peer clients' access except for those on the Exempted User Groups or Exempted Subnets defined below.

If "foobar.com" is entered, any web site with a host name ending in foobar.com will be blocked, e.g. www.foobar.com, foobar.com, etc. However, "myfoobar.com" will not be blocked.

You may enter the wild card "." at the end of a domain name to block any web site with a host name having the domain name in the middle. If you enter "foobar.*", then "www.foobar.com", "www.foobar.co.jp", or "foobar.co.uk" will be blocked. Placing the wild card in any other position is not supported.

The device will inspect and look for blocked domain names on all HTTP and HTTPS traffic.

Customized Domains

Enter an appropriate website address, and the Pepwave MAX will block and disallow LAN/PPTP/SpeedFusionTM peer clients to access these websites. Exceptions can be added using the instructions in Sections 20.1.3.2 and 20.1.3.3.

You may enter the wild card "." at the end of a domain name to block any web site with a host name having the domain name in the middle. For example, If you enter "foobar.*", then "www.foobar.com", "www.foobar.co.jp", or "foobar.co.uk" will be blocked. Placing the wild card in any other position is not supported.

The Pepwave MAX will inspect and look for blocked domain names on all HTTP traffic. Secure web (HTTPS) traffic is not supported.

Exempted User Groups

Check and select pre-defined user group(s) who can be exempted from the access blocking rules. User groups can be defined at **QoS>User Groups** section. Please refer to **Section 17.1** (<https://docs.google.com/document/d/1Vp7p6EIA8pgmy5zbnpQKqcxCyEaT3QWyxMtVTpwUic/edit#bookmark=id.16x20ju>) for details.

Exempted Subnets

With the subnet defined in the field, clients on the particular subnet(s) can be exempted from the access blocking rules.

Ch22. Routing Protocols

OSPF & RIPv2 (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch22-routing-protocols/ospf-ripv2/>)

BGP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch22-routing-protocols/bgp/>)

OSPF & RIPv2

The Pepwave supports OSPF and RIPv2 dynamic routing protocols. Click the **Advanced** tab from the top bar, and then click the **Routing Protocols > OSPF & RIPv2** item on the sidebar to reach the following menu:

OSPF

Router ID

LAN IP Address

Area

Interfaces

No OSPF Area Defined.

Add

RIPv2

No RIPv2 Defined.

OSPF & RIPv2 Route Advertisement

SpeedFusion VPN Route Isolation

?

☐ Enable

Network Advertising

?

+

All LAN/VLAN networks will be advertised when no network advertising is chosen.

Static Route Advertising

?

☒ Enable

Excluded Networks

Subnet Mask

255.255.255.0 (/24)


+

Save

OSPF

- Router ID**

This field determines the ID of the router. By default, this is specified as the WAN IP address. If you want to specify your own ID, enter it into the **Custom** field.
- Area**

This is an overview of the OSPF areas that you have defined. Clicking on the name under Area allows you to configure the connection. To define a new area, click **Add**. To delete an existing area, click on the  .

OSPF settings

Area ID

0.0.0.0

Link Type

☒ Broadcast
 ☐ Point-to-Point

Authentication

None ▾

Interfaces

☐ Untagged LAN
☐ V167 (192.168.167.1/24)
☐ WAN 1
☐ WAN 2
☐ WAN 3
☐ WAN 4
☐ WAN 5
☒ PepVPN

Save

Cancel


OSPF Settings

Area ID Assign a name to be applied to this group. Machines linked to this group will send and receive related OSPF packets, while unlinked machines will ignore them.

Link Type Choose the type of network that this area will use.

Authentication If an authentication method is used, select one from this drop-down menu. Available options are **MD5** and **Text**. Authentication key(s) may be input next to the drop-down menu after selecting an authentication method.

Interfaces Select the interface(s) that this area will use to listen to and deliver OSPF packets.

To access RIPv2 settings, click on  .

RIPv2 settings

Authentication

None ▾

Interfaces

☐ Untagged LAN
☐ V167 (192.168.167.1/24)
☐ WAN 1
☐ WAN 2
☐ WAN 3
☐ WAN 4
☐ WAN 5

Save

Cancel

RIPv2 Settings

Authentication If an authentication method is used, select one from this drop-down menu. Available options are **MD5** and **Text**. Authentication key(s) may be input next to the drop-down menu after selecting an authentication method.

Interfaces Select the interface(s) that this area will use to listen to and deliver RIPv2 packets.

| OSPF & RIPv2 Route Advertisement | | | | | |
|----------------------------------|--|-------------------|-------------|--|---------------------|
| SpeedFusion VPN Route Isolation | <input type="checkbox"/> Enable | | | | |
| Network Advertising | <div> <div>---</div> <div>+</div> </div> <small>All LAN/VLAN networks will be advertised when no network advertising is chosen.</small> | | | | |
| Static Route Advertising | <input checked="" type="checkbox"/> Enable <table border="1"> <thead> <tr> <th>Excluded Networks</th> <th>Subnet Mask</th> </tr> </thead> <tbody> <tr> <td></td> <td>255.255.255.0 (/24)</td> </tr> </tbody> </table> <div>+</div> | Excluded Networks | Subnet Mask | | 255.255.255.0 (/24) |
| Excluded Networks | Subnet Mask | | | | |
| | 255.255.255.0 (/24) | | | | |
| <div>Save</div> | | | | | |

OSPF & RIPv2 Route Advertisement

SpeedFusion VPN Route Isolation Isolate SpeedFusion VPN peers from each other. Received SpeedFusion VPN routes will not be forwarded to other SpeedFusion VPN peers to reduce bandwidth consumption..

Network Advertising Networks to be advertised over OSPF & RIPv2. If no network is selected, all LAN / VLAN networks will be advertised by default.

Static Route Advertising Enabling OSPF & RIPv2 Route Advertising allows it to advertise LAN static routes over OSPF & RIPv2. Static routes on the Excluded Networks table will not be advertised.

BGP

Click the **Advanced** tab along the top bar, and then click the **BGP** item on the sidebar to configure BGP.

| BGP | AS | Neighbors | |
|----------------|-------|-------------|--|
| Uplink | 64520 | 172.16.51.1 | |
| <div>Add</div> | | | |

Click the “” to delete a BGP profile.

Click “**Add**” to create a new BGP profile.

| BGP Profile | | | | | | |
|-----------------------|---|-------------------|----------------|----------|--------------------|---|
| Profile Name | <input type="text"/> | | | | | |
| Enable | <input checked="" type="checkbox"/> | | | | | |
| Interface | Untagged LAN (192.: | | | | | |
| Router ID | <input checked="" type="radio"/> LAN IP Address <input type="radio"/> Custom: <input type="text"/> | | | | | |
| Autonomous System | <input type="text"/> | | | | | |
| Neighbor | IP Address | Autonomous System | Multihop / TTL | Password | AS-Path Prepending | |
| | | | disable | | | + |
| Hold Time | 240 | | | | | |
| Next Hop Self | <input type="checkbox"/> | | | | | |
| iBGP Local Preference | 100 | | | | | |
| BFD | <input type="checkbox"/> Enable | | | | | |

BGP Profile

Name This field specifies the name that represents this profile.

| | |
|------------------------------|---|
| Enable | When this box is checked, this BGP profile will be enabled. If it is left unchecked, it will be disabled. |
| Interface | The interface in which the BGP neighbor is located. |
| Router ID | This field specifies the unique IP as the identifier of the local device running BGP. |
| Autonomous System | The Autonomous System Number (ASN) assigned to this profile. |
| Neighbor | BGP Neighbors and their details. |
| IP address | The IP address of the Neighbor. |
| Autonomous System | The Neighbor's ASN. |
| Multihop/TTL | This field determines the Time-to-live (TTL) of BGP packets. Leave this field blank if the BGP neighbor is directly connected, otherwise you must specify a TTL value. This option should be used if the configured Neighbor's IP address does not match the selected Interface's network subnets. The TTL value must be between 2 to 255. |
| Password | (Optional) Assign a password for MD5 authentication of BGP sessions. |
| AS-Path Prepending: | AS path to be prepended to the routes received from this Neighbor. Values must be ASN and separated by commas. For example: inputting "64530,64531" will prepend "64530, 64531" to received routes. |
| Hold Time | Wait time in seconds for a keepalive message from a Neighbor before considering the BGP connection as stalled. The value must be either 0 (infinite hold time) or between 3 and 65535 inclusively. Default: 240 |
| Next Hop Self | Enable this option to advertise your own source address as the next hop when propagating routes. |
| iBGP Local Preference | This is the metric advertised to iBGP Neighbors to indicate the preference for external routes. The value must be between 0 to 4294967295 inclusively. Default: 100 |
| BFD | Enable this option to add Bidirectional Forwarding Detection for path failure. All directly connected Neighbors that use the same physical interface share the same BFD settings. All multihop Neighbors share the same multihop BFD settings. You can configure BFD settings in the BGP profile listing page after this option is enabled. |

| | |
|--|---|
| Filter Mode | <p>This field allows for the selection of the filter mode for route import.</p> <p>None: All BGP routes will be accepted.</p> <p>Accept: Routes in “Restricted Networks” will be accepted, routes not in the list will be rejected.</p> <p>Reject: Routes in “Blocked Networks” will be rejected, routes not in the list will be accepted.</p> |
| Restricted Networks / Blocked Networks | <p>This field specifies the network(s) in the “route import” entry.</p> <p>Exact Match: When this box is checked, only routes with the same Network and Subnet Mask will be filtered. Otherwise, routes within the Networks and Subnets will be filtered.</p> |
|  | |
| Filter Mode | <p>This field allows for the selection of the filter mode for route export.</p> <p>None: All BGP routes will be accepted.</p> <p>Accept: Routes in “Restricted Networks” will be accepted, routes not in the list will be rejected.</p> <p>Reject: Routes in “Blocked Networks” will be rejected, routes not in the list will be accepted.</p> |
| Restricted Networks / Blocked Networks | <p>This field specifies the network(s) in the “route export” entry.</p> <p>Exact Match: When this box is checked, only routes with the same Network and Subnet Mask will be filtered. Otherwise, routes within the Networks and Subnets will be filtered.</p> |
| Export to other BGP Profile | <p>When this box is checked, routes learnt from this BGP profile will be exported to other BGP profiles.</p> |
| Export to OSPF | <p>When this box is checked, routes learnt from this BGP profile will be exported to the OSPF routing protocol.</p> |

Ch23. Remote User Access

A remote-access VPN connection allows an individual user to connect to a private business network from a remote location using a laptop or desktop computer connected to the Internet. Networks routed by a Pepwave router can be remotely accessed via OpenVPN, L2TP with IPsec or

PPTP. To configure this feature, navigate to **Advanced > Remote User Access** and choose the required VPN type.

Remote User Access Settings

Enable

☒

VPN Type

☒ L2TP with IPsec

☐ PPTP

☐ OpenVPN

Preshared Key

?

☒ Hide Characters

Listen On

?

Connection / IP Address(es)

☐ WAN 1

☐ WAN 2

☐ Wi-Fi WAN

☐ Cellular 1

☐ Cellular 2

☐ USB

Authentication

Local User Accounts

User Accounts

?

Username

Password

+

Save

Remote User Access Settings

Enable


When this box is checked, this Remote User Access profile will be enabled.

If it is left unchecked, it will be disabled.

VPN Type

This field allows you to select the VPN type for the remote user access connection. The available options are:


- L2TP with IPsec



The screenshot shows a configuration form with two sections. The top section, labeled 'VPN Type', contains three radio buttons: 'L2TP with IPsec' (which is selected), 'PPTP', and 'OpenVPN'. The bottom section, labeled 'Preshared Key', contains a text input field and a checkbox labeled 'Hide Characters' which is checked.

If L2TP with IPsec is selected, it may need to enter the pre-shared key for the remote user access.


- PPTP



The screenshot shows the 'VPN Type' section of the configuration form. The 'PPTP' radio button is selected, while 'L2TP with IPsec' and 'OpenVPN' are unselected.


If PPTP selected, there is no additional configuration required. The Point-to-Point Tunneling Protocol (PPTP) is an obsolete method for implementing virtual private networks. PPTP has many well known security issues

- OpenVPN



The screenshot shows the 'VPN Type' section with the 'OpenVPN' radio button selected. Below the radio buttons, there is a text link: 'You can obtain the OpenVPN client profile from the [status page](#)'. Below this, there is a section labeled 'Connection Security Refresh' with a text input field containing '60' and the label 'minute(s)'.

If the OpenVPN is selected, the OpenVPN Client profile can be downloaded from the **Status > Device** page after the configuration has been saved.



The screenshot shows a configuration bar for the 'OpenVPN Client Profile'. It includes a help icon (?) and two links: 'Route all traffic' and 'Split tunnel'.


You have a choice between 2 different OpenVPN Client profiles:

- **“Route all traffic” profile**
Using this profile, VPN clients will send all the traffic through the OpenVPN tunnel
- **“Split tunnel” profile**
Using this profile, VPN clients will ONLY send those traffic designated to the untagged LAN and VLAN segment through the OpenVPN tunnel.

Pre-shared Key

If **L2TP with IPsec** is selected in the VPN Type, enter the pre shared key in the text field. Please note that remote devices will need this preshared key to access the Balance.

Disabled Weak Ciphers

You may click the  button to show in the Pre-shared key and enable this option.

When checked, weak ciphers such as 3DES will be disabled.

Please note: Legacy and Android devices may not able to connect.

Connection Security Refresh

If **OpenVPN** is selected in the VPN Type, this settings is for specifying the interval for refreshing the connection.

Listen On

This setting is for specifying the WAN IP addresses that allow remote user access.

Port

If **OpenVPN** is selected in the VPN Type, the **Port** setting specifies the port(s) that correspond to the service.

Authentication

Determine the method of authenticating remote users:

Local User Accounts

| | | | |
|----------------|-----------------------|----------|----------|
| Authentication | Local User Accounts ▼ | | |
| User Accounts | ? | Username | Password |
| | | | ***** |
| | | | ***** |

This setting allows you to define the Remote User Accounts. Click **Add**  to input username and password to create an account. After adding the user accounts, you can click on a username to edit the account password.

Note:

The username must contain lowercase letters, numerics, underscore(_), dash(-), at sign(@), and period(.) only.

The password must be between 8 and 12 characters long

LDAP Server

| | | |
|-------------------------|---|----------|
| Authentication | LDAP Server ▼ | |
| Authentication Protocol | MS-CHAP v2 ▼ | |
| LDAP Server | | Port 389 |
| | <input type="checkbox"/> Use DN/Password to bind to LDAP Server | |
| Base DN | | |
| Base Filter | | |

Enter the matching LDAP server details to allow for LDAP server authentication.

Radius Server

| | | |
|-------------------------|--|--|
| Authentication Protocol | MS-CHAP v2 ▼ | |
| | You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles | |
| Authentication Host | | |
| Authentication Port | 1812 | |
| Authentication Secret | | |
| | <input checked="" type="checkbox"/> Hide Characters | |
| | You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles | |
| Accounting Host | | |
| Accounting Port | 1813 | |
| Accounting Secret | | |
| | <input checked="" type="checkbox"/> Hide Characters | |
| Source Network Address | Untagged LAN ▼ | |

Enter the matching Radius server details to allow for Radius server authentication.

Active Directory

| | | |
|-------------------|---|--|
| Authentication | Active Directory ▼ | |
| Server IP Address | | |
| Server Hostname | | |
| Domain | | |
| Custom Workgroup | {Optional} | |
| Admin Username | | |
| Admin Password | | |
| | <input checked="" type="checkbox"/> Hide Characters | |


Enter the matching Active Directory details to allow for Active Directory server authentication.

Ch24. Miscellaneous Settings

The miscellaneous settings include configuration for High Availability, Certificate Manager, service forwarding, service passthrough, GPS forwarding, GPIO, Groupe Networks and SIM Toolkit (depending the feature is supported on the model of Peplink router that is being used).

High Availability

Many Pepwave routers support high availability (HA) configurations via an open standard virtual router redundancy protocol (VRRP, RFC 3768). In an HA configuration, two Pepwave routers provide redundancy and failover in a master-slave arrangement. In the event that the master unit is down, the slave unit becomes active. High availability will be disabled automatically where there is a drop-in connection configured on a LAN bypass port.

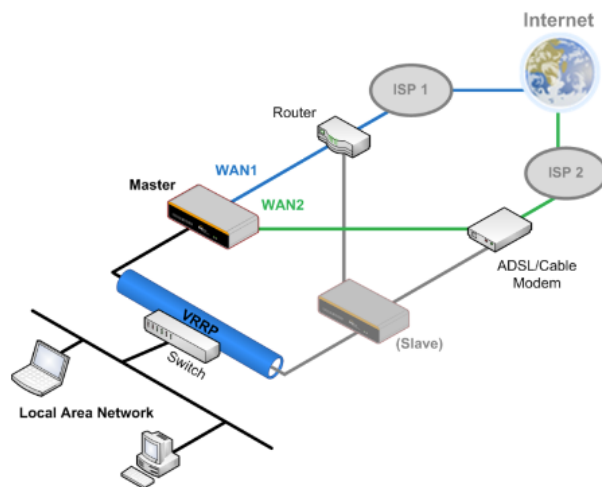

In the diagram, the WAN ports of each Pepwave router connect to the router and to the modem. Both Pepwave routers connect to the same LAN switch via a LAN port.

An elaboration on the technical details of the implementation of the virtual router redundancy protocol (VRRP, RFC 3768) by Pepwave routers follows:

- In an HA configuration, the two Pepwave routers communicate with each other using VRRP over the LAN.
- The two Pepwave routers broadcast heartbeat signals to the LAN at a frequency of one heartbeat signal per second.
- In the event that no heartbeat signal from the master Pepwave router is received in 3 seconds (or longer) since the last heartbeat signal, the slave Pepwave router becomes active.
- The slave Pepwave router initiates the WAN connections and binds to a previously configured LAN IP address.
- At a subsequent point when the master Pepwave router recovers, it will once again become active.

You can configure high availability at **Advanced > Misc. Settings > High Availability**.

Interface for Master Router

| High Availability | |
|----------------------------------|---|
| Enable | <input checked="" type="checkbox"/> |
| Group Number | <input type="text"/> |
| Preferred Role | <input checked="" type="radio"/> Master <input type="radio"/> Slave |
| Resume Master Role Upon Recovery | <input checked="" type="checkbox"/> |
| Virtual IP Address | <input type="text"/> |
| LAN Administration IP Address | 192.168.86.1 |
| Subnet Mask | 255.255.255.0 |

Interface for Slave Router

| High Availability | |
|-------------------------------------|---|
| Enable | <input checked="" type="checkbox"/> |
| Group Number | <input type="text"/> |
| Preferred Role | <input type="radio"/> Master <input checked="" type="radio"/> Slave |
| Configuration Sync. | <input type="checkbox"/> Master Serial Number: <input type="text"/> |
| Establish Connections In Slave Role | <input type="checkbox"/> |
| Virtual IP Address | <input type="text"/> |
| LAN Administration IP Address | 192.168.86.1 |
| Subnet Mask | 255.255.255.0 |

High Availability

Enable

Checking this box specifies that the Pepwave router is part of a high availability configuration.

Group Number

This number identifies a pair of Pepwave routers operating in a high availability configuration. The two Pepwave routers in the pair must have the same **Group Number** value.

Preferred Role

This setting specifies whether the Pepwave router operates in master or slave mode. Click the corresponding radio button to set the role of the unit. One of the units in the pair must be configured as the master, and the other unit must be configured as the slave.

Resume Master Role Upon Recovery

This option is displayed when **Master** mode is selected in **Preferred Role**. If this option is enabled, once the device has recovered from an outage, it will take over and resume its **Master** role from the slave unit.

Configuration Sync.

This option is displayed when **Slave** mode is selected in **Preferred Role**. If this option is enabled and the **Master Serial Number** entered matches with the actual master unit's, the master unit will automatically transfer the configuration to this unit. Please make sure the **LAN IP Address** and the **Subnet Mask** fields are set correctly in the LAN settings page. You can refer to the **Event Log** for the configuration synchronization status.

Master Serial Number

If **Configuration Sync.** is checked, the serial number of the master unit is required here for the feature to work properly.

Virtual IP

The HA pair must share the same **Virtual IP**. The **Virtual IP** and the **LAN Administration IP** must be under the same network.

LAN Administration IP


This setting specifies a LAN IP address to be used for accessing administration functionality. This address should be unique within the LAN.

Subnet Mask


This setting specifies the subnet mask of the LAN.

Important Note

For Pepwave routers in NAT mode, the virtual IP (VIP) should be set as the default gateway for all hosts on the LAN segment. For example, a firewall sitting behind the Pepwave router should set its default gateway as the virtual IP instead of the IP of the master router.

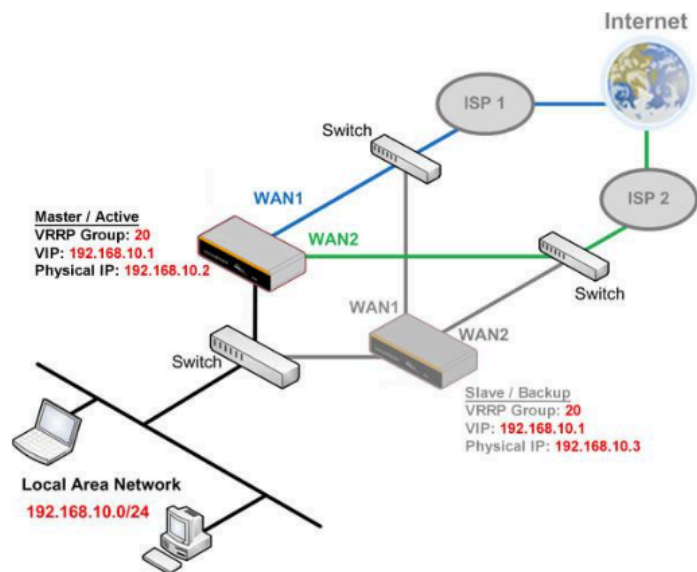

In drop-in mode, no other configuration needs to be set.

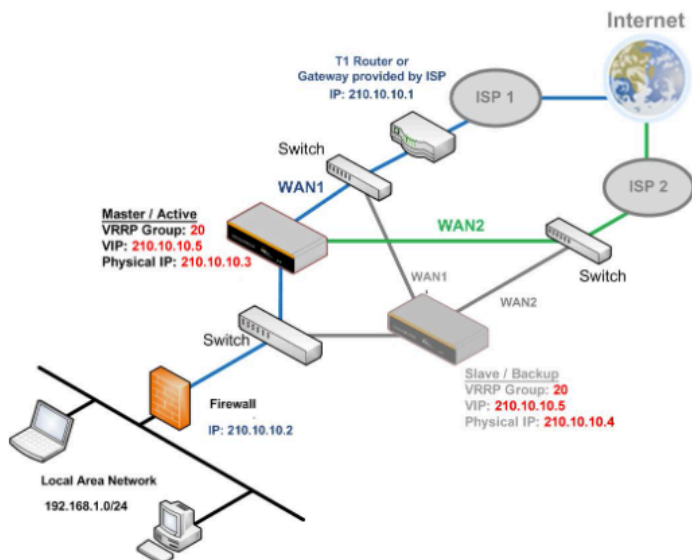

Please note that the drop-in WAN cannot be configured as a LAN bypass port while it is configured for high availability.

RADIUS Server

RADIUS Server settings are located at **Advanced > Misc. Settings > RADIUS Server**.

| Authentication Server | Host | Port |
|-----------------------------|------|------|
| No server profiles defined | | |
| New Profile | | |

| Accounting Server | Host | Port |
|-----------------------------|------|------|
| No server profiles defined | | |
| New Profile | | |

To configure the Authentication Server and Accounting Server, click **New Profile** to display the following screen:

Authentication Server ✕

| | |
|--------|---|
| Name | <input type="text"/> |
| Host | <input type="text"/> |
| Port | <input type="text" value="1812"/> |
| Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |

[Save](#) [Cancel](#)

Authentication Server

Name This field is for specifying a name to represent this profile.

Host Specifies the IP address or hostname of the RADIUS server host.

Port This setting specifies the UDP destination port for authentication requests. By default, the port number is 1812.

Secret This field is for entering the secret key for communicating to the RADIUS server.

Accounting Server ✕

| | |
|--------|---|
| Name | <input type="text"/> |
| Host | <input type="text"/> |
| Port | <input type="text" value="1813"/> |
| Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |

[Save](#) [Cancel](#)

Accounting Server

Name This field is for specifying a name to represent this profile.

Host Specifies the IP address or hostname of the RADIUS server host.

Port This setting specifies the UDP destination port for accounting requests. By default, the port number is 1813.

Secret This field is for entering the secret key for communicating to the RADIUS server.

Certificate Manager

| Certificate | | |
|-----------------------|-------------------------------|--|
| SpeedFusion/IPsec VPN | No Certificate | |
| Web Admin SSL | Default Certificate is in use | |
| Captive Portal SSL | Default Certificate is in use | |
| OpenVPN CA | Default Certificate is in use | |

Wi-Fi WAN Client Certificate

No Certificates defined

Add Certificate

Wi-Fi WAN CA Certificate

No Certificates defined

Add Certificate

This section allows for certificates to be assigned to the local VPN, Web Admin SSL, Captive Portal SSL, OpenVPN CA, Wi-Fi WAN Client certificate and Wi-Fi WAN CA Certificate.

The following knowledge base article describes how to create self-signed certificates and import it to a Peplink Product.

<https://forum.peplink.com/t/how-to-create-a-self-signed-certificate-and-import-it-to-a-peplink-product/> (<https://forum.peplink.com/t/how-to-create-a-self-signed-certificate-and-import-it-to-a-peplink-product/>)

Service Forwarding

Service forwarding settings are located at **Advanced > Misc. Settings > Service Forwarding**.

SMTP Forwarding Setup

SMTP Forwarding ☐ Enable

Web Proxy Forwarding Setup

Web Proxy Forwarding ☐ Enable

DNS Forwarding Setup

Forward Outgoing DNS Requests to Local DNS Proxy ☐ Enable

Custom Service Forwarding Setup

Custom Service Forwarding ☐ Enable

Service Forwarding

SMTP Forwarding When this option is enabled, all outgoing SMTP connections destined for any host at TCP port 25 will be intercepted. These connections will be redirected to a specified SMTP server and port number. SMTP server settings for each WAN can be specified after selecting **Enable**.

Web Proxy Forwarding When this option is enabled, all outgoing connections destined for the proxy server specified in **Web Proxy Interception Settings** will be intercepted. These connections will be redirected to a specified web proxy server and port number. Web proxy interception settings and proxy server settings for each WAN can be specified after selecting **Enable**.

| | |
|----------------------------------|---|
| DNS Forwarding | When this option is enabled, all outgoing DNS lookups will be intercepted and redirected to the built-in DNS name server. If any LAN device is using the DNS name servers of a WAN connection, you may want to enable this option to enhance the DNS availability without modifying the DNS server setting of the clients. The built-in DNS name server will distribute DNS lookups to corresponding DNS servers of all available WAN connections. In this case, DNS service will not be interrupted, even if any WAN connection is down. |
| Custom Service Forwarding | When custom service forwarding is enabled, outgoing traffic with the specified TCP port will be forwarded to a local or remote server by defining its IP address and port number. |

SMTP Forwarding

Some ISPs require their users to send e-mails via the ISP's SMTP server. All outgoing SMTP connections are blocked except those connecting to the ISP's. Pepwave routers support intercepting and redirecting all outgoing SMTP connections (destined for TCP port 25) via a WAN connection to the WAN's corresponding SMTP server.

SMTP Forwarding Setup ?

SMTP Forwarding ☒ Enable

| Connection | Enable Forwarding? | SMTP Server | SMTP Port |
|------------|--------------------------|-------------|-----------|
| WAN 1 | <input type="checkbox"/> | | |
| WAN 2 | <input type="checkbox"/> | | |
| Wi-Fi WAN | <input type="checkbox"/> | | |
| Cellular 1 | <input type="checkbox"/> | | |
| Cellular 2 | <input type="checkbox"/> | | |
| USB | <input type="checkbox"/> | | |

To enable the feature, select **Enable** under **SMTP Forwarding Setup**. Check **Enable Forwarding** for the WAN connection(s) that needs forwarding. Under **SMTP Server**, enter the ISP's e-mail server host name or IP address. Under **SMTP Port**, enter the TCP port number for each WAN.

The Pepwave router will intercept SMTP connections. Choose a WAN port according to the outbound policy, and then forward the connection to the SMTP server if the chosen WAN has enabled forwarding. If the forwarding is disabled for a WAN connection, SMTP connections for the WAN will be simply be forwarded to the connection's original destination.

Note

If you want to route all SMTP connections only to particular WAN connection(s), you should create a custom rule in outbound policy (see **Section 14.2**).

Web Proxy Forwarding

Web Proxy Forwarding Setup

Web Proxy Forwarding

☒ Enable

Web Proxy Interception Settings

Proxy Server

IP Address

Port

(Current settings in users' browser)

| Connection | Enable Forwarding? | Proxy Server IP Address : Port |
|------------|--------------------------|--------------------------------|
| WAN 1 | <input type="checkbox"/> | <div></div> : <div></div> |
| WAN 2 | <input type="checkbox"/> | <div></div> : <div></div> |
| Wi-Fi WAN | <input type="checkbox"/> | <div></div> : <div></div> |
| Cellular 1 | <input type="checkbox"/> | <div></div> : <div></div> |
| Cellular 2 | <input type="checkbox"/> | <div></div> : <div></div> |
| USB | <input type="checkbox"/> | <div></div> : <div></div> |

When this feature is enabled, the Pepwave router will intercept all outgoing connections destined for the proxy server specified in **Web Proxy Interception Settings**, choose a WAN connection with reference to the outbound policy, and then forward them to the specified web proxy server and port number. Redirected server settings for each WAN can be set here. If forwarding is disabled for a WAN, web proxy connections for the WAN will be simply forwarded to the connection's original destination.

DNS Forwarding

DNS Forwarding Setup

Forward Outgoing DNS Requests to Local DNS Proxy

☐ Enable

When DNS forwarding is enabled, all clients' outgoing DNS requests will also be intercepted and forwarded to the built-in DNS proxy server.

Custom Service Forwarding

Custom Service Forwarding Setup

Custom Service Forwarding

☒ Enable

Settings

| | | | |
|-------------|-------------------|-------------|--------------|
| TCP Port | Server IP Address | Server Port | |
| <div></div> | <div></div> | <div></div> | <div>+</div> |

After clicking the **enable** checkbox, enter your TCP port for traffic heading to the router, and then specify the IP Address and Port of the server you wish to forward to the service to.

Service Passthrough

Service passthrough settings can be found at **Advanced>Misc. Settings>Service Passthrough**.

| Service Passthrough Support | |
|-----------------------------|--|
| SIP | <input checked="" type="radio"/> Standard Mode <input type="radio"/> Compatibility Mode <input checked="" type="checkbox"/> Define custom signal ports 1. <input type="text"/> 2. <input type="text"/> 3. <input type="text"/> |
| H.323 | <input checked="" type="checkbox"/> Enable |
| FTP | <input checked="" type="checkbox"/> Enable <input type="checkbox"/> Define custom control ports |
| TFTP | <input checked="" type="checkbox"/> Enable |
| IPsec NAT-T | <input checked="" type="checkbox"/> Enable <input checked="" type="checkbox"/> Define custom ports 1. <input type="text"/> 2. <input type="text"/> 3. <input type="text"/> <input checked="" type="checkbox"/> Route IPsec Site-to-Site VPN via <input type="text" value="WAN 1"/> |

Some Internet services need to be specially handled in a multi-WAN environment. Pepwave routers can handle these services such that Internet applications do not notice being behind a multi-WAN router. Settings for service passthrough support are available here.

Service Passthrough Support

SIP Session initiation protocol, aka SIP, is a voice-over-IP protocol. The Pepwave router can act as a SIP application layer gateway (ALG) which binds connections for the same SIP session to the same WAN connection and translate IP address in the SIP packets correctly in NAT mode. Such passthrough support is always enabled, and there are two modes for selection: **Standard Mode** and **Compatibility Mode**. If your SIP server's signal port number is non-standard, you can check the box **Define custom signal ports** and input the port numbers to the text boxes.

H.323 With this option enabled, protocols that provide audio-visual communication sessions will be defined on any packet network and pass through the Pepwave router.

FTP FTP sessions consist of two TCP connections; one for control and one for data. In a multi-WAN situation, they must be routed to the same WAN connection. Otherwise, problems will arise in transferring files. By default, the Pepwave router monitors TCP control connections on port 21 for any FTP connections and binds TCP connections of the same FTP session to the same WAN. If you have an FTP server listening on a port number other than 21, you can check **Define custom control ports** and enter the port numbers in the text boxes.

TFTP The Pepwave router monitors outgoing TFTP connections and routes any incoming TFTP data packets back to the client. Select **Enable** if you want to enable TFTP passthrough support.

IPsec NAT-T This field is for enabling the support of IPsec NAT-T passthrough. UDP ports 500, 4500, and 10000 are monitored by default. You may add more custom data ports that your IPsec system uses by checking **Define custom ports**. If the VPN contains IPsec site-to-site VPN traffic, check **Route IPsec Site-to-Site VPN** and choose the WAN connection to route the traffic to.

UART

Selected Pepwave MAX routers feature a RS-232 serial interface on the built-in terminal block. The RS-232 serial interface can be used to connect to a serial device and make it accessible over an TCP/IP network.

The serial interface can be enabled and parameters can be set on the web admin page under **Advanced > UART**. Make sure they match the serial device you are connecting to.

| Serial to Network | |
|---------------------------|---|
| Enable | <input checked="" type="checkbox"/> |
| Allowed Source IP Subnets | <input checked="" type="radio"/> Any <input type="radio"/> Allows access from the following IP subnets only |
| Web Console | <input type="checkbox"/> |

| Serial Parameters | |
|-------------------|---------|
| Baud Rate | 9600 ▼ |
| Data Bits | 8 ▼ |
| Stop Bits | 1 ▼ |
| Parity | None ▼ |
| Flow Control | None ▼ |
| Interface | RS232 ▼ |

| Operating Settings | |
|----------------------|-------------------|
| Operation Mode | TCP Server Mode ▼ |
| Local TCP Port | 4001 |
| Max Connection | 1 |
| TCP Alive Check Time | 7 min(s) |
| Inactivity Time | 0 ms |

| Data Packing | |
|-------------------|--------------------------|
| Packing Length | 0 byte(s) |
| Delimiter | <input type="checkbox"/> |
| Delimiter process | Do Nothing ▼ |
| Force Transmit | 0 ms |

There are 4 pins i.e. TX, RX, RTS, CTS on the terminal block for serial connection and they correspond to the pins in a DB-9 connector as follows:

| DB-9 | Pepwave MAX Terminal Block |
|-------|----------------------------|
| Pin 1 | – |
| Pin 2 | Rx (rated +25V) |
| Pin 3 | Tx (rated +12V) |
| Pin 4 | – |
| Pin 5 | – |
| Pin 6 | – |
| Pin 7 | RTS |
| Pin 8 | CTS |
| Pin 9 | – |

The RS232 serial interface is not an isolated RS232. External galvanic isolation may be added if required.

Be sure to check whether your serial cable is a null modem cable, commonly known as crossover cable, or a straight through cable. If in doubt, swap Rx and Tx, and RTS and CTS, at the other end and give it another go.

Once connected, your serial device should be accessible on your Pepwave MAX router LAN IP address at the specified TCP port.

GPS Forwarding

Using the GPS forwarding feature, some Pepwave routers can automatically send GPS reports to a specified server. To set up GPS forwarding, navigate to **Advanced>GPS Forwarding**.

| GPS Forwarding | | | | |
|--------------------|---|----------------------|----------|--|
| Enable | <input checked="" type="checkbox"/> | | | |
| Server | Server IP Address / Host Name | Port | Protocol | Report Interval (s) |
| | <input type="text"/> | <input type="text"/> | UDP ▾ | 1 <input data-bbox="1242 399 1274 430" type="button" value="+"/> |
| GPS Report Format | <input checked="" type="radio"/> NMEA <input type="radio"/> TAIP | | | |
| NMEA Sentence Type | <input checked="" type="checkbox"/> GPRMC <input type="checkbox"/> GPGGA <input type="checkbox"/> GPVTG <input type="checkbox"/> GPGSA <input type="checkbox"/> GPGSV | | | |
| Vehicle ID | <input type="text"/> <input data-bbox="609 577 641 609" type="button" value="?"/> | | | |

GPS Forwarding

Enable

Check this box to turn on GPS forwarding.

Server

Enter the name/IP address of the server that will receive GPS data. Also specify a port number, protocol (**UDP** or **TCP**), and a report interval of between 1 and 10 seconds. Click to save these settings.

GPS Report Format

Choose from NMEA or TAIP format for sending GPS reports.

NMEA Sentence Type

If you've chosen to send GPS reports in NMEA format, select one or more sentence types for sending the data (**GPRMC**, **GPGGA**, **GPVTG**, **GPGSA**, and **GPGSV**).

Vehicle ID

The vehicle ID will be appended in the last field of the NMEA sentence. Note that the NMEA sentence will become customized and non-standard.

TAIP Sentence Type/TAIP ID (optional)

If you've chosen to send GPS reports in TAIP format, select one or more sentence types for sending the data (**PV—Position / Velocity Solution** and **CP—Compact Velocity Solution**). You can also optionally include an ID number in the **TAIP ID** field.

Ignition Sensing

Ignition Sensing detects the ignition signal status of a vehicle it is installed in.


This feature allows the cellular router to start up or shut down when the engine of that vehicle is started or turned off.

The time delay setting between ignition off and power down of the router is a configurable setting, which allows the router to stay on for a period of time after the engine of a vehicle is turned off.


Ignition Sensing installation

| | Function | Colour Wire |
|--|----------|---|
| | I/O | Digital Input / Digital Output / Analog Input |
| | IGN I/P | Digital Input / Ignition Sensing |
| | DC IN - | connected to permanent negative feed (ground) |
| | DC IN + | connected to permanent positive feed (power) |

Connectivity diagram for devices with 4-pin connector

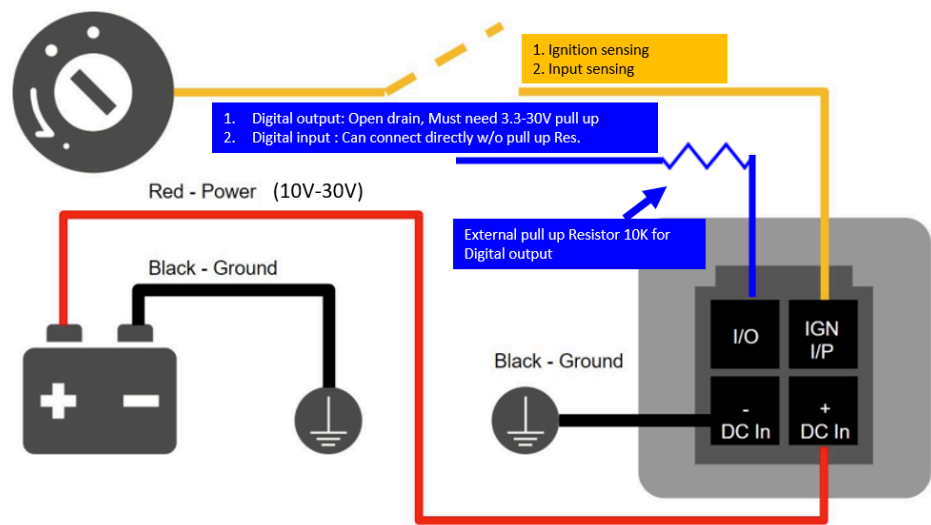

Connectivity diagram for devices with terminal block connection

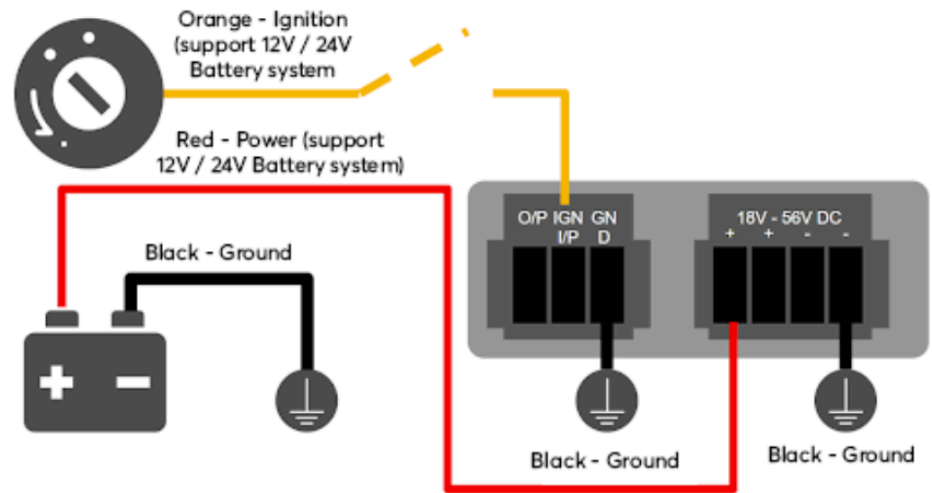

GPIO Menu

Note: This feature is applicable for certain models that come with a GPIO interface.

Ignition Sensing options can be found in **Advanced > GPIO**.

The configurable option for Ignition Input is **Delay**; the time in seconds that the router stays powered on after the ignition is turned off.

- a.) Ignition sensing: 9-30V active high for IGN purpose
- b.) Input Sensing: I/O input

| IGN I/P | |
|---------|-------------------------------------|
| Enable | <input checked="" type="checkbox"/> |
| Type | Digital Input ▾ |
| Mode | Input Sensing ▾ |
| Delay | <input type="text"/> seconds |

The O/P (connected to the I/O pin on a 4 pin connector) can be configured as a digital input, a digital output, or an analog input.

Digital Input – the connection supports input sensing; it reads the external input and determines if the settings should be ‘High’ (on) or ‘Low’ (off).

Digital Output – when there is a healthy WAN connection, the output pin is marked as ‘High’ (on). Otherwise, it will be marked as ‘Low’ (off).

- a.) Digital output:

Open drain for IO output. It is required to add an external pull up resistor of 10K for 3.3-30V pull up voltage.

(DO NOT exceed 250mA)

3.3-30V active high, 0.05-0.5V active low(mapping to 3.3-30V pull up voltage)

- b.) Digital input: I/O input

| I/O | |
|--------|-------------------------------------|
| Enable | <input checked="" type="checkbox"/> |
| Type | Digital Output ▾ |
| Mode | Toggle Low ▾ |

Note: The Digital Output state (on/off) upon rebooting the device may vary depending on the model, eg. MAX BR1 MK2 = Persistent; MAX Transit Mini with ContentHub = Reset to default, etc.

Analog Input – to be confirmed. In most cases, it should read the external input and determine the voltage level.

NTP Server

Pepwave routers can now serve as a local NTP server. Upon start up, it is now able to provide connected devices with the accurate time, precise UTC from either an external NTP server or via GPS and ensuring that connected devices always receive the correct time.

Compatible with: BR1 ENT, BR1 Pro CAT-20/5G, 700 HW3, HD2/4, Transit

NTP Server setting can be found via: **Advanced>Misc. Settings>NTP Server**



| NTP Server | |
|------------|--------------------------|
| Enable | <input type="checkbox"/> |

Save

Time Settings can be found at **System>Time>Time Settings**



| Time Settings | |
|---------------|--|
| Time Zone | (GMT) Casablanca Show all |
| Time Sync | Time Server |
| Time Server | 0.peplink.pool.ntp.org |

Save

Grouped Networks

Advanced > Grouped Networks allows to configure destination networks in grouped format.



| Name | Networks | |
|---------|-----------------|---|
| Example | 192.168.1.71/28 | X |

Add Group

Select Add group to create a new group with single IPaddresses or subnets from different VLANs.



| Grouped Networks | | | |
|------------------|--------------|-----------------------|---|
| Name | Example | | |
| Networks | Network | Subnet Mask | |
| | 192.168.1.71 | 255.255.255.240 (/28) | X |
| | | 255.255.255.255 (/32) | + |

Save Cancel

The created network groups can be used in outbound policies, firewall rules.

Remote SIM Management

The Remote SIM management is accessible via **Advanced > Misc Settings > Remote SIM Management**. By default, this feature is disabled.

Please note that a limited number of Pepwave routers support the SIM Injector, may refer to the link: <https://www.peplink.com/products/sim-injector/> (<https://www.peplink.com/products/sim-injector/>) or Appendix B for more details on FusionSIM Manual.

| | | |
|------------------------|--|--|
| Remote SIM Host | | |
| Remote SIM is disabled | | |

Remote SIM Host Settings

| | | |
|--------------------------|--------------------------|--|
| Remote SIM Host Settings | | |
| Auto LAN Discovery | <input type="checkbox"/> | |
| Remote SIM Host | <input type="text"/> | |

Save

Remote SIM Host Settings

Active LAN Discovery Check this box to enable Auto LAN discovery of the remote SIM server..

Remote SIM Host Enter the public IP address of the SIM Injector. If you enter IP addresses here, it is not necessary to tick the “**Auto LAN Discovery**” box above.

| | | | |
|-----------------|--|--|--|
| Remote SIM Host | | | |
| 192.168.1.10 | | | |

| | | | |
|---|--|--------|------|
| Remote SIM Management | | Server | Slot |
| No Remote SIM Defined. | | | |
| <input type="button" value="Add Remote SIM"/> | | | |

You may define the Remote SIM information by clicking the “**Add Remote SIM**”. Here, you can enable **Data Roaming** and **custom APN** for your SIM cards.

| | | |
|---|---|--|
| Add Remote SIM | | |
| Remote SIM | | |
| SIM Server | <input type="text" value="New SIM Server..."/> | |
| SIM Server - Serial Number | <input type="text"/> | |
| SIM Server - Name | <input type="text" value="Optional"/> | |
| SIM Slot | <input type="text" value="1"/> | |
| SIM Slot - Name | <input type="text" value="Optional"/> | |
| Data Roaming | <input type="checkbox"/> | |
| Operator Settings (for LTE/HSPA/EDGE/GPRS only) | <input checked="" type="radio"/> Auto <input type="radio"/> Custom Mobile Operator Settings | |
| SIM PIN (Optional) | <input type="text"/> | |
| | <input type="text"/> (Confirm) | |

Save

Add Remote SIM Settings

SIM Server Add a new SIM Server

SIM Server - Serial Number Enter the serial number of SIM Server

SIM Server - Name This optional field allows you define a name for the SIM Server

SIM Slot Click the drop-down menu and choose which SIM slot you want to connect.

| | |
|---|---|
| SIM Slot – Name | This optional field allows you to define a name for the SIM slot. |
| Data Roaming | Enables data roaming on this particular SIM card. |
| Operator Settings (for LTE//HSPA/EDGE/GPRS Only) | This setting allows you to configure the APN settings of your connection. If Auto is selected, the mobile operator should be detected automatically. The connected device will be configured and connection will be made automatically. If there is any difficulty in making a connection, you may select Custom to enter your carrier's APN, Username and Password settings manually. The correct values can be obtained from your carrier. The default and recommended setting is Auto. |

SIM Toolkit

The SIM Toolkit, accessible via **Advanced > Misc Settings > SIM Toolkit**, supports two functionalities, USSD and SMS.

USSD

Unstructured Supplementary Service Data (USSD) is a protocol used by mobile phones to communicate with their service provider's computers. One of the most common uses is to query the available balance.

| SIM Status | |
|----------------|----------|
| WAN Connection | Cellular |
| SIM Card | 1 |
| IMSI | |
| Tool | USSD |

| USSD | |
|-----------|--|
| USSD Code | <input type="text"/> <input type="button" value="Submit"/> |

Enter your USSD code under the **USSD Code** text field and click **Submit**.

| SIM Status | |
|----------------|---|
| WAN Connection | Cellular |
| SIM Card | 1 |
| IMSI | 856195002108538 |
| USSD Code | *138# <input type="button" value="Submit"/> |
| Receive SMS | <input type="button" value="Get"/> |

You will receive a confirmation. To check the SMS response, click **Get**.

| SIM Status | |
|----------------|---|
| WAN Connection | Cellular |
| SIM Card | 1 |
| IMSI | 856195002108538 |
| USSD Code | *138# <input type="button" value="Submit"/> |
| USSD Status | Request is sent successfully |
| Receive SMS | <input type="button" value="Get"/> |

After a few minutes you will receive a response to your USSD code

| Received SMS | |
|--------------------|--|
| May 27 20:02 | PCX As of May 27th Account Balance: \$ 0.00 Amount Unbilled Voice Calls: 0 minutes Video Calls: 0 minutes SMS (Roaming): 0 SMS (Within Network): 0 MMS (Roaming): 0 MMS (Within Network): 0 Data Usage: 7384KB (For reference only, please refer to bill) |
| Aug 8 , 2013 14:51 | PCX iPhone & Android users need to make sure "PCX" is entered as the APN under "Settings" > "Mobile network setting" for web browsing and mobile data service. Other handset models will receive handset settings via SMS shortly (PIN: 1234) (Consumer Service Hotline: 1000 / Business Customer Hotline 10088) |


SMS


The SMS option allows you to read SMS (text) messages that have been sent to the SIM in your Pepwave router.

| SIM Status | |
|----------------|-----------------------------|
| WAN Connection | Cellular |
| SIM Card | 1 |
| IMSI | 7 34 30 1 9 0 2 5 6 2 9 8 0 |
| Tool | SMS |

| SMS | | Refresh |
|--------------------|---|---------|
| Jun 21, 2017 18:00 | To: [Redacted] Thank you, your web portal is available - you can change this when you first login at fiber.asia | ✖ |
| May 06, 2017 12:23 | To: [Redacted] To: [Redacted] Your phone still is ready to use. Go to your PG&N account on your desktop or on a mobile phone click here: http://mobile.fiber.asia/portal/ | ✖ |
| Mar 15, 2017 10:03 | From: [Redacted] Hello, There is planned maintenance at the Internet City HQ over the week. If your services affected, you can get updates here: http://fiber.asia/ | ✖ |
| Mar 06, 2017 14:50 | To: [Redacted] To: [Redacted] Your phone still is ready to use. Go to your PG&N account on your desktop or on a mobile phone click here: http://mobile.fiber.asia/portal/ | ✖ |
| Dec 28, 2016 09:53 | From: [Redacted] Hi, we have your request for a monthly bill price offer but we cannot find this offer applied to your line in fact, your monthly recurring charge will remain as follows: 100000 VND (10,000 VND) | ✖ |
| Dec 06, 2016 13:09 | To: [Redacted] To: [Redacted] Your phone still is ready to use. Go to your PG&N account on your desktop or on a mobile phone click here: http://mobile.fiber.asia/portal/ | ✖ |
| Nov 08, 2016 11:29 | From: [Redacted] Hello, There is planned maintenance at the Internet City HQ over the week. If your services affected, you can get updates here: http://fiber.asia/ | ✖ |
| Sep 07, 2016 17:05 | From: [Redacted] Good news, definitely upgrading your status on providing background how you use in 2016 will be to meet your needs more easily. Contact: support@fiber.asia | ✖ |

UDP Relay

You may define the UDP relay by clicking the **Advanced > Misc Settings > UDP Relay**. You can click  to enable the UDP relay to relay UDP Broadcast or Multicast traffic for LAN/VLAN/SpeedFusion VPN.

| UDP Relay |
|--|
| Disabled  |

Click "New UDP Relay Rule" to define the relay rule.

| Name | Port / Multicast Address | Source Network | Destination Network | |
|----------------------------|--------------------------|----------------|---------------------|--|
| No UDP relay rules defined | | | | |
| New UDP Relay Rule | | | | |

UDP Relay

Name

Port

Multicast

☒ Address:

Source Network

LAN: Untagged LAN

Destination Network

Any

Save

Cancel

| UDP Relay | |
|----------------------------|--|
| Name | This field is for specifying a name to represent this profile. |
| Port | This feid is to enter the specific port number for the UDP relay |
| Multicast | If Multicast is not selected, it will broadcast relay rule. If Multicast is selected, you may need to enter a valid multicast address. |
| Secure Network | Select the specific connection as a source network to where the device is to relay UDP Broadcast packets. |
| Destination Network | You may select the specific connection from the drop-down list or may custom combination network as a destination network that receives the UDP packet relays. |

Ch25. AP

AP Controller (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch25-ap/ap-controller/>)

Wireless SSID (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch25-ap/wireless-ssid/>)

Wireless Mesh (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch25-ap/wireless-mesh/>)

Settings (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch25-ap/settings/>)

AP Controller

The AP controller acts as a centralized controller of Pepwave Access Points.

With this feature, users can customize and manage up to 1500 Access Points from a single Pepwave router interface.

To configure, navigate to the **AP** tab. and the following screen appears.

| AP Controller | | |
|---------------|---|---|
| AP Management |  | <input checked="" type="checkbox"/> Integrated AP <input checked="" type="checkbox"/> External AP |
| Sync. Method |  | As soon as possible ▾ |
| Permitted AP |  | <input checked="" type="radio"/> Any <input type="radio"/> Approved List |

AP Controller

AP Management The AP controller for managing Pepwave APs can be enabled by checking this box. When this option is enabled, the AP controller will wait for management connections originating from APs over the LAN on TCP and UDP port 11753. It will also wait for captive portal connections on TCP port 443. An extended DHCP option, **CAPWAP Access Controller addresses** (field 138), will be added to the DHCP server. A local DNS record, **AP Controller**, will be added to the local DNS proxy.

Sync Method

- As soon as possible
- Progressively
- One at a time

Permitted AP Access points to manage can be specified here. If **Any** is selected, the AP controller will manage any AP that reports to it. If **Approved List** is selected, only APs with serial numbers listed in the provided text box will be managed.

Wireless SSID

| SSID | Security Policy |
|------------------------------------|-----------------|
| No SSID Defined | |
| <input type="button" value="Add"/> | |

Current SSID information appears in the **SSID** section. To edit an existing SSID, click its name in the list. To add a new SSID, click **Add**. Note that the following settings vary by model. The below settings is shows a new SSID window with Advanced Settings enabled (these are available by selecting the question mark in the top right corner).




| SSID | |
|---------------------------|---|
| SSID Settings | |
| SSID | <input type="text"/> |
| Schedule | Always on |
| VLAN | Untagged LAN |
| Broadcast SSID | <input checked="" type="checkbox"/> |
| Data Rate | <input checked="" type="radio"/> Auto <input type="radio"/> Fixed <input type="radio"/> Minimum |
| Multicast Filter | <input type="checkbox"/> |
| Multicast Rate | MCS24/MCS16/MCS8/MCS0/6M |
| IGMP Snooping | <input type="checkbox"/> |
| Layer 2 Isolation | <input type="checkbox"/> |
| Maximum number of clients | 2.4 GHz: Unlimited 5 GHz: Unlimited |
| Band Steering | <input type="checkbox"/> Disable |

SSID Settings

| | |
|---------------------|---|
| SSID | This setting specifies the SSID of the virtual AP to be scanned by Wi-Fi clients. |
| Enable | Click the drop-down menu to apply a time schedule to this interface |
| VLAN | This setting specifies the VLAN ID to be tagged on all outgoing packets generated from this wireless network (i.e., packets that travel from the Wi-Fi segment through the Pepwave AP One unit to the Ethernet segment via the LAN port). The default value of this setting is 0 , which means VLAN tagging is disabled (instead of tagged with zero). |
| Broadcast SSID | This setting specifies whether or not Wi-Fi clients can scan the SSID of this wireless network. Broadcast SSID is enabled by default. |
| Data Rate A | Select Auto to allow the Pepwave router to set the data rate automatically, or select Fixed and choose a rate from the displayed drop-down menu. |
| Multicast FilterA | This setting enables the filtering of multicast network traffic to the wireless SSID. |
| Multicast RateA | This setting specifies the transmit rate to be used for sending multicast network traffic. The selected Protocol and Channel Bonding settings will affect the rate options and values available here. |
| IGMP Snooping A | To allow the Pepwave router to listen to internet group management protocol (IGMP) network traffic, select this option. |
| DHCP Option 82 A | If you use a distributed DHCP server/relay environment, you can enable this option to provide additional information on the manner in which clients are physically connected to the network. |
| Layer 2 Isolation A | <p>Layer 2 refers to the second layer in the ISO Open System Interconnect model.</p> <p>When this option is enabled, clients on the same VLAN, SSID, or subnet are isolated to that VLAN, SSID, or subnet, which can enhance security. Traffic is passed to the upper communication layer(s). By default, the setting is disabled.</p> |

| | |
|----------------------------------|--|
| Maximum Number of Clients | Indicate the maximum number of clients that should be able to connect to each frequency. |
|----------------------------------|--|

A – Advanced feature. Click the  button on the top right-hand corner to activate.

Security Settings

| | |
|-----------------|--|
| Security Policy | WPA2 - Personal |
| Encryption | AES:CCMP |
| Shared Key | <div> <div>?</div> <div> <div>.....</div> <div> <input checked="" type="checkbox"/> Hide Characters </div> </div> </div> |

Security Settings

Security Policy This setting configures the wireless authentication and encryption methods. Available options :

- **Open** (No Encryption)
- **Enhanced Open** (OWE)
- **WPA3 -Personal** (AES:CCMP)
- **WPA2/WPA3 -Personal** (AES:CCMP)
- **WPA2 -Personal** (AES:CCMP)
- **WPA2 – Enterprise**
- **WPA/WPA2 – Personal** (TKIP/AES: CCMP)
- **WPA/WPA2 – Enterprise**

When **WPA/WPA2 – Enterprise** is configured, RADIUS-based 802.1 x authentication is enabled. Under this configuration, the **Shared Key** option should be disabled. When using this method, select the appropriate version using the **V1/V2** controls. The security level of this method is known to be very high.

When **WPA/WPA2- Personal** is configured, a shared key is used for data encryption and authentication. When using this configuration, the **Shared Key** option should be enabled. Key length must be between eight and 63 characters (inclusive). The security level of this method is known to be high.

NOTE:

When **WPA2/WPA3- Personal** is configured, if a managed AP which is NOT WPA3 PSK capable, the AP Controller will not push those WPA3 and WPA2/WPA3 SSID to that AP.

Access Control Settings

| | |
|------------------|---------------------------------------|
| Restricted Mode | Deny all except listed |
| MAC Address List | <div> <div>?</div> <div></div> </div> |

Access Control

Restricted Mode The settings allow the administrator to control access using MAC address filtering. Available options are **None**, **Deny all except listed**, **Accept all except listed** and **Radius MAC Authentication**.

MAC Address List Connection coming from the MAC addresses in this list will be either denied or accepted based on the option selected in the previous field.

If more than one MAC address needs to be entered, you can use a carriage return to separate them.

| RADIUS Settings | | |
|-----------------------|--|---|
| | Primary | Secondary |
| | You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles | |
| Authentication Host | <input type="text"/> | <input type="text"/> |
| Authentication Port | <input type="text" value="1812"/> | <input type="text" value="1812"/> |
| Authentication Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |
| | You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles | |
| Accounting Host | <input type="text"/> | <input type="text"/> |
| Accounting Port | <input type="text" value="1813"/> | <input type="text" value="1813"/> |
| Accounting Secret | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters | <input type="text"/> <input checked="" type="checkbox"/> Hide Characters |
| NAS-Identifier | <input type="text" value="Device Name"/> | |

RADIUS Settings

Authentication Host This field is for specifying the IP address of the primary RADIUS server for Authentication and, if applicable, the secondary RADIUS server.

Authentication Port In the field, the UDP authentication port(s) used by your RADIUS server(s) or click the **Default** is **1812**.

Authentication Secret This settings is enter the RADIUS shared secret for the primary server and, if applicable, the secondary RADIUS server.

Accounting Host This field is for specifying the IP address of the primary RADIUS server for Accounting and, if applicable, the secondary RADIUS server.

Accounting Port In the field, enter the UDP accounting port(s) used by your RADIUS server(s) or click the **Default** is **1813**.

Accounting Secret This settings is enter the RADIUS shared secret for the primary server and, if applicable, the secondary RADIUS server.

NAS-Identifier Choose between **Device Name**, **LAN MAC address**, **Device Serial Number** and **Custom Value**

| Guest Protect | | | |
|----------------------|---------------------------------|---|----------------------------------|
| Block All Private IP | <input type="checkbox"/> | | |
| Custom Subnet | Network <input type="text"/> | Subnet Mask <input type="text" value="255.255.255.0 (/24)"/> | <input type="button" value="+"/> |
| Block Exception | Network <input type="text"/> | Subnet Mask <input type="text" value="255.255.255.0 (/24)"/> | <input type="button" value="+"/> |

Guest Protect

Block All Private IP Check this box to deny all connection attempts by private IP addresses.

| | |
|------------------------|--|
| Custom Subnet | To create a custom subnet for guest access, enter the IP address and choose a subnet mask from the drop-down menu. |
| Block Exception | To block access from a particular subnet, enter the IP address and choose a subnet mask from the drop-down menu. |

Firewall Settings

Firewall Mode

Disable

Disable

Flexible - Allow all except...

Lockdown - Block all except...

Firewall Settings

| | |
|----------------------------|---|
| Firewall Mode | <p>The settings allow administrators to control access to the SSID based on Firewall Rules.</p> <p>Available options are Disable, Lockdown - Block all except... and Flexible -Allow all except...</p> |
| Firewall Exceptions | Create Firewall Rules based on Port , IP Network , MAC address or Domain Name |

Wireless Mesh

Wireless Mesh

Frequency Band

No Wireless Mesh Defined

Add

Wireless Mesh Support is available on devices running 802.11ac (Wi-Fi 5) and above. Along with the AP Controller, mesh network extensions can be established, which can expand network coverage. Note that the Wireless Mesh settings need to match the Mesh ID and Shared Key of the other devices on the same selected frequency band.

To create a new Wireless Mesh profile, go to **AP > Wireless Mesh**, and click **Add**.

Wireless Mesh Settings

Mesh ID

Frequency

2.4 GHz

5 GHz

Shared Key

Hide Characters

Save

Cancel

Wireless Mesh Settings

| | |
|------------------|---|
| Mesh ID | Enter a name to represent the Mesh profile. |
| Frequency | Select the 2.4GHz or 5GHz frequency to be used. |

Shared Key

Enter the shared key in the text field. Please note that it needs to match the shared keys of the other APs in the Wireless Mesh settings.

Click **Hide / Show Characters** to toggle visibility.

Settings

To configure the AP settings, navigating to **AP > Settings** :

AP Settings

SSID

2.4 GHz 5 GHz

☒ ☒ PEPWAVE_A712

Operating Country

United States

2.4 GHz

5 GHz

Protocol

802.11n

802.11n/ac

Integrated AP supports 802.11n/ac only

Channel Width

Auto

Auto

Channel

Auto

Edit

Channels: 1 6 11

Auto

Edit

Channels: 36 40 44 48 149 153 157 161 165

Auto Channel Update

Daily at

Clear

All

☐ 00:00 ☐ 01:00 ☐ 02:00 ☒ 03:00 ☐ 04:00 ☐ 05:00 ☐ 06:00 ☐ 07:00 ☐ 08:00 ☐ 09:00 ☐ 10:00 ☐ 11:00 ☐ 12:00 ☐ 13:00 ☐ 14:00 ☐ 15:00 ☐ 16:00 ☐ 17:00 ☐ 18:00 ☐ 19:00 ☐ 20:00 ☐ 21:00 ☐ 22:00 ☐ 23:00 ☒ Wait until no active client associated

Daily at

Clear

All

☐ 00:00 ☐ 01:00 ☐ 02:00 ☒ 03:00 ☐ 04:00 ☐ 05:00 ☐ 06:00 ☐ 07:00 ☐ 08:00 ☐ 09:00 ☐ 10:00 ☐ 11:00 ☐ 12:00 ☐ 13:00 ☐ 14:00 ☐ 15:00 ☐ 16:00 ☐ 17:00 ☐ 18:00 ☐ 19:00 ☐ 20:00 ☐ 21:00 ☐ 22:00 ☐ 23:00 ☒ Wait until no active client associated

Output Power

Max

Boost

Max

Boost

Client Signal Strength Threshold

Disabled

Disabled

Maximum number of clients

Unlimited

Unlimited

Discover Nearby Networks

☒

Note: Feature will be automatically turned on with Auto Channel / Dynamic Output Power

Beacon Rate

1 Mbps

Beacon Interval

100 ms

DTIM

1

RTS Threshold

0

Fragmentation Threshold

0

(0: Disable)

Distance / Time Converter

4050 m

Note: Input distance for recommended values

Slot Time

Auto Custom

9

μs

ACK Timeout

48

μs

AP Settings

SSID

These buttons specify which wireless networks will use this AP profile. You can also select the frequencies at which each network will transmit. Please note that the Pepwave MAX does not detect whether the AP is capable of transmitting at both frequencies. Instructions to transmit at unsupported frequencies will be ignored by the AP.

| | |
|---|---|
| Operating Country | <p>This drop-down menu specifies the national / regional regulations which the AP should follow.</p> <ul style="list-style-type: none"> ◦ If a North American region is selected, RF channels 1 to 11 will be available and the maximum transmission power will be 26 dBm (400 mW). ◦ If European region is selected, RF channels 1 to 13 will be available. The maximum transmission power will be 20 dBm (100 mW). <p>Note: Users are required to choose an option suitable to local laws and regulations.</p> <p>Per FCC regulation, the country selection is not available on all models marketed in the US. All US models are fixed to US channels only.</p> |
| Preferred Frequency | These buttons determine the frequency at which access points will attempt to broadcast. This feature will only work for APs that can transmit at both 5.4GHz and 5GHz frequencies. |
| Protocol | This option allows you to specify whether 802.11b and/or 802.11g client association requests will be accepted. Available options are 802.11ng and 802.11na . By default, 802.11ng is selected. |
| Channel Width | There are three options: 20 MHz, 20/40 MHz, and 40 MHz. With this feature enabled, the Wi-Fi system can use two channels at once. Using two channels improves the performance of the Wi-Fi connection. |
| Channel | This drop-down menu selects the 802.11 channel to be utilized. Available options are from 1 to 11 and from 1 to 13 for the North America region and Europe region, respectively. (Channel 14 is only available when the country is selected as Japan with protocol 802.11b.) If Auto is set, the system will perform channel scanning based on the scheduled time set and choose the most suitable channel automatically. |
| Auto Channel Update | Indicate the time of day at which update automatic channel selection. |
| Output Power | <p>This drop-down menu determines the power at which the AP under this profile will broadcast. When fixed settings are selected, the AP will broadcast at the specified power level, regardless of context. When Dynamic settings are selected, the AP will adjust its power level based on its surrounding APs in order to maximize performance.</p> <p>The Dynamic: Auto setting will set the AP to do this automatically. Otherwise, the Dynamic: Manual setting will set the AP to dynamically adjust only if instructed to do so. If you have set Dynamic:Manual, you can go to AP>Toolbox>Auto Power Adj. to give your AP further instructions.</p> <p>If you click the Boost checkbox, the AP under this profile will transmit using additional power. Please note that using this option with several APs in close proximity will lead to increased interference.</p> |
| Client Signal Strength Threshold | This field determines that maximum signal strength each individual client will receive. The measurement unit is megawatts. |
| Max number of Clients | This field determines the maximum clients that can be connected to APs under this profile. |

| | |
|---|--|
| Management VLAN ID | <p>This field specifies the VLAN ID to tag to management traffic, such as AP to AP controller communication traffic. The value is 0 by default, meaning that no VLAN tagging will be applied.</p> <p>Note: change this value with caution as alterations may result in loss of connection to the AP controller.</p> |
| Discover Nearby Networks^A | <p>This option is to turn on and off to scan the nearby the AP.</p> <p>Note: Feature will be automatically turned on with Auto Channel / Dynamic Output Power</p> |
| Beacon Rate^A | <p>This drop-down menu provides the option to send beacons in different transmit bit rates. The bit rates are 1Mbps, 2Mbps, 5.5Mbps, 6Mbps, and 11Mbps.</p> |
| Beacon Interval^A | <p>This drop-down menu provides the option to set the time between each beacon send. Available options are 100ms, 250ms, and 500ms.</p> |
| DTIMA | <p>This field provides the option to set the frequency for beacon to include delivery traffic indication message (DTIM). The interval unit is measured in milliseconds.</p> |
| RTS Threshold^A | <p>This field provides the option to set the minimum packet size for the unit to send an RTS using the RTS/CTS handshake. Setting 0 disables this feature.</p> |
| Fragmentation Threshold^A | <p>Determines the maximum size (in bytes) that each packet fragment will be broken down into. Set 0 to disable fragmentation.</p> |
| Distance/Time Converter^A | <p>Select the distance you want your Wi-Fi to cover in order to adjust the below parameters. Default values are recommended.</p> |
| Slot Time^A | <p>This field provides the option to modify the unit wait time before it transmits. The default value is 9μs.</p> |
| ACK Timeout^A | <p>This field provides the option to set the wait time to receive acknowledgement packet before doing retransmission. The default value is 48μs.</p> |

A – Advanced feature. Click the  button on the top right-hand corner to activate.

Important Note

Per FCC regulation, the country selection is not available on all models marketed in the US. All US models are fixed to US channels only.



The device with integrated AP can operate under the Wi-Fi Operating Mode, and the default setting is **WAN + AP** mode:

Note: This option is available for selected devices only (HD2/HD4 and HD2/HD4 MBX).

Integrated AP

WAN In this mode, all Wi-Fi will operate as Wi-Fi WAN and no integrated Wi-Fi AP will be operated on this device.

If Wi-Fi Operating mode is choosing **WAN**, The status indicated by the front panel LED is as follows:

- Wi-Fi 1 is Green if Wi-Fi WAN 1 is enabled.
- Wi-Fi 2 is Green if Wi-Fi WAN 2 is enabled.

WAN + AP In this mode, some Wi-Fi will operate as Wi-Fi WAN. Some other Wi-Fi WANs will be forced offline and their Wi-Fi resources will be reserved for integrated Wi-Fi AP operations.

If Wi-Fi Operating mode is choosing **WAN + AP**, The status indicated by the front panel LED is as follows:

- Wi-Fi 1 is Green if WI-FI WAN is enabled.
- Wi-Fi 2 is Green if Wi-Fi AP is ON.

AP In this mode, all Wi-Fi functions as integrated Wi-Fi AP. All Wi-Fi WANs will be forced to go offline.

If Wi-Fi Operating mode is choosing **AP**, The status indicated by the front panel LED is as follows:

- W-Fi 1 is Green, if there is any Wireless SSID is selected 2.4GHz.
- W-Fi 2 is Green, if there is any Wireless SSID is selected 5GHz.

| Web Administration Settings (on External AP) | |
|--|--|
| Enable | <input checked="" type="checkbox"/> |
| Web Access Protocol | <input type="radio"/> HTTP <input checked="" type="radio"/> HTTPS |
| Management Port | <input type="text" value="443"/> |
| HTTP to HTTPS Redirection | <input checked="" type="checkbox"/> |
| Admin Username | <input type="text" value="admin"/> |
| Admin Password | <input type="password" value="*****"/> <input type="button" value="Generate"/> |
| | <input checked="" type="checkbox"/> Hide Characters |

Web Administration Settings (on External AP)

| | |
|---------------------------|---|
| Enable | Check the box to allow the Pepwave router to manage the web admin access information of the AP. |
| Web Access Protocol | These buttons specify the web access protocol used for accessing the web admin of the AP. The two available options are HTTP and HTTPS . |
| Management Port | This field specifies the management port used for accessing the device. |
| HTTP to HTTPS Redirection | This option will be available if you have chosen HTTPS as the Web Access Protocol . With this enabled, any HTTP access to the web admin will redirect to HTTPS automatically. |
| Admin User Name | This field specifies the administrator username of the web admin. It is set as <i>admin</i> by default. |
| Admin Password | This field allows you to specify a new administrator password. You may also click the Generate button and let the system generate a random password automatically. |

| AP Time Settings | |
|------------------|---|
| Time Zone | <input checked="" type="radio"/> Follow controller time zone selection <input type="radio"/> (GMT-11:00) Midway Island |
| Time Server | <input checked="" type="radio"/> Follow controller NTP server selection <input type="radio"/> |

This allows users to configure AP Time Settings (both Timezone and NTP) in AP Controller.

AP Time Settings

Time Zone This field is to select the time zone for the AP controller.

Time Server This field is to select the time server for the AP controller.

| Controller Management Settings | |
|--------------------------------|--------------------------|
| Manage Unreachable Action | <input type="checkbox"/> |

This settings is to allow user to manage external AP's controller unreachable action. When **Manage Unreachable Action** is checked, there will have 2 options which are **"None"** and **"Radio Off"**.

| AP Controller Settings | |
|------------------------|--------------------------|
| Client Load Balancing | <input type="checkbox"/> |

This is an option to enable client load balancing for AP Controller. When the option is enabled, it is trying to balance the station count on APs within the same profile.

Some Pepwave models displays a screen similar to the one shown below, navigating to **AP > Settings**:

| Wi-Fi Radio Settings | |
|----------------------|--|
| Operating Country | United States |
| Wi-Fi Antenna | <input type="radio"/> Internal <input checked="" type="radio"/> External |

Wi-Fi Radio Settings

Operating Country This option sets the country whose regulations the Pepwave router follows.

Wi-Fi Antenna Wi-Fi Antenna Choose from the router's internal or optional external antennas, if so equipped.

| Wi-Fi AP Settings | |
|-------------------|--|
| Protocol | 802.11ng |
| Channel | 1 (2.412 GHz) |
| Channel Width | Auto |
| Output Power | Max <input type="checkbox"/> Boost |
| Beacon Rate | 1Mbps |
| Beacon Interval | 100ms |
| DTIM | 1 |
| Slot Time | 9 μ s |
| ACK Timeout | 48 μ s |
| Frame Aggregation | <input checked="" type="checkbox"/> Enable |
| Guard Interval | <input type="radio"/> Short <input type="radio"/> Long |

Wi-Fi AP Settings

Protocol This option allows you to specify whether 802.11b and/or 802.11g client association requests will be accepted. Available options are **802.11ng** and **802.11na**. By default, 802.11ng is selected.

| | |
|--------------------------------------|--|
| Channel | This option allows you to select which 802.11 RF channel will be used. Channel 1 (2.412 GHz) is selected by default. |
| Channel Width | Auto (20/40 MHz) and 20 MHz are available. The default setting is Auto (20/40 MHz) , which allows both widths to be used simultaneously. |
| Output Power | This option is for specifying the transmission output power for the Wi-Fi AP. There are 4 relative power levels available – Max , High , Mid , and Low . The actual output power will be bound by the regulatory limits of the selected country. |
| Beacon Rate^A | This option is for setting the transmit bit rate for sending a beacon. By default, 1Mbps is selected. |
| Beacon Interval^A | This option is for setting the time interval between each beacon. By default, 100ms is selected. |
| DITMA | This field allows you to set the frequency for the beacon to include a delivery traffic indication message. The interval is measured in milliseconds. The default value is set to 1 ms . |
| Slot Time^A | This field is for specifying the wait time before the Router transmits a packet. By default, this field is set to 9 µs . |
| ACK Time^A | This field is for setting the wait time to receive an acknowledgement packet before performing a retransmission. By default, this field is set to 48 µs . |
| Frame Aggreaction^A | This option allows you to enable frame aggregation to increase transmission throughput. |
| Guard Interval^A | This setting allows choosing a short or long guard period interval for your transmissions. |

Ch26. AP Controller Status

Info (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/info/>)

Access Point (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/access-point-usage/>)

Wireless SSID (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/wireless-ssid/>)

Wireless Client (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/wireless-client/>)

Mesh / WDS (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/mesh-wds/>)

Nearby Device (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/nearby-device/>)

Event Log (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ap-controller-status/event-log/>)

Info

A comprehensive overview of your AP can be accessed by navigating to **AP > Controller Status > Info**.



AP Controller

License Limit This field displays the maximum number of AP your Balance router can control. You can purchase licenses to increase the number of AP you can manage.

Frequency Underneath, there are two check boxes labeled **2.4 Ghz** and **5 Ghz**. Clicking either box will toggle the display of information for that frequency. By default, the graphs display the number of clients and data usage for both 2.4GHz and 5 GHz frequencies.

SSID The colored boxes indicate the SSID to display information for. Clicking any colored box will toggle the display of information for that SSID. By default, all the graphs show information for all SSIDs.

No. of APs This pie chart and table indicates how many APs are online and how many are offline.

No.of Clients This graph displays the number of clients connected to each network at any given time. Mouse over any line on the graph to see how many clients connected to a specific SSID for that point in time.

Data Usage This graph enables you to see the data usage of any SSID for any given time period. Mouse over any line on the graph to see the data usage by each SSID for that point in time. Use the buttons next to **Zoom** to select the time scale you wish to view. In addition, you could use the sliders at the bottom to further refine your timescale.

| Events | | View Alerts |
|----------------|--|-------------|
| Jan 2 11:01:11 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 11:00:42 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 11:00:38 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 11:00:36 | AP One 300M: Client 00:21:6A:35:59:A4 associated with Balance_11a | |
| Jan 2 11:00:20 | AP One 300M: Client 60:67:20:24:B6:4C disassociated from Marketing_11a | |
| Jan 2 11:00:09 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:59:09 | AP One 300M: Client 00:21:6A:35:59:A4 disassociated from Balance_11a | |
| Jan 2 10:59:08 | Office Fiber AP: Client 18:00:2D:3D:4E:7F associated with Balance | |
| Jan 2 10:58:53 | Michael's Desk: Client 18:00:2D:3D:4E:7F disassociated from Wireless | |
| Jan 2 10:58:18 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:58:03 | Office InWall: Client 10:BF:48:E9:76:C7 associated with Wireless | |
| Jan 2 10:57:47 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:57:19 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:57:09 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:56:48 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:56:39 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:56:19 | AP One 300M: Client 00:26:BB:05:84:A4 associated with Marketing_11a | |
| Jan 2 10:56:09 | AP One 300M: Client 9C:04:EB:10:39:4C associated with Marketing_11a | |
| Jan 2 10:55:42 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:55:29 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| | | More... |

0

Events

This event log displays all activity on your AP network, down to the client level. Click **View Alerts** to see only alerts, and click the **More...** link for additional records.

| AP Time Settings | |
|------------------|---|
| Time Zone | <input checked="" type="radio"/> Follow controller time zone selection <input type="radio"/> (GMT-11:00) Midway Island |
| Time Server | <input checked="" type="radio"/> Follow controller NTP server selection <input type="radio"/> |

This allow user to configure AP Time Settings (both Timezone and NTP) in AP Controller.

AP Time Settings

Time Zone This field is to select the time zone for the AP controller.

Time Server This field is to select the time server for the AP controller.

| Controller Management Settings | |
|--------------------------------|--------------------------|
| Manage Unreachable Action | <input type="checkbox"/> |

This settings is to allow user to manage external AP's controller unreachable action. When **Manage Unreachable Action** is checked, there will have 2 options which are "None" and "Radio Off".

| AP Controller Settings | |
|------------------------|--------------------------|
| Client Load Balancing | <input type="checkbox"/> |

This is an option to enable client load balancing for AP Controller. When the option is enabled, it is trying to balance the station count on APs within the same profile.

Access Point

A detailed breakdown of data usage for each AP is available at **AP > Controller Status > Access Point**.




Managed APs


| <input type="checkbox"/> | Name | IP Address | MAC | Location | Firmware | Radio Config. | Config. Sync. |   |
|--------------------------|--------------------|------------|-----|----------|----------|---------------|---------------|---|
| | MAX-BR1-85F4/29... | (Local) | - | - | - | | |   |
| Remove Offline Units | | | | | | Reboot | Set Firmware | |

Managed APs


**Managed
APs**

This table shows the detailed information on each AP, including channel, number of clients, upload traffic, and download traffic. Click the blue arrows at the left of the table to expand and collapse information on each device group.

On the right of the table, you will see the following icons:   .


Click the  icon to see a usage table for each client:

| Client List | | | | | | |
|-------------------|-------------|----------|----------------|-----------|-----------|-----------|
| MAC Address | IP Address | Type | Signal | SSID | Upload | Download |
| 80:56:f2:98:75:ff | 10.9.2.7 | 802.11ng | Excellent (37) | Balance | 66.26 MB | 36.26 MB |
| c4:6a:b7:bf:d7:15 | 10.9.2.123 | 802.11ng | Excellent (42) | Balance | 6.65 MB | 2.26 MB |
| 70:56:81:1d:87:f3 | 10.9.2.102 | 802.11ng | Good (23) | Balance | 1.86 MB | 606.63 KB |
| e0:63:e5:83:45:c8 | 10.9.2.101 | 802.11ng | Excellent (39) | Balance | 3.42 MB | 474.52 KB |
| 18:00:2d:3d:4e:7f | 10.9.2.66 | 802.11ng | Excellent (25) | Balance | 640.29 KB | 443.57 KB |
| 14:5a:05:80:4f:40 | 10.9.2.76 | 802.11ng | Excellent (29) | Balance | 2.24 KB | 3.67 KB |
| 00:1a:dd:c5:4e:24 | 10.8.9.84 | 802.11ng | Excellent (29) | Wireless | 9.86 MB | 9.76 MB |
| 00:1a:dd:bb:29:ec | 10.8.9.73 | 802.11ng | Excellent (25) | Wireless | 9.36 MB | 11.14 MB |
| 40:b0:fa:c3:26:2c | 10.8.9.18 | 802.11ng | Good (23) | Wireless | 118.05 MB | 7.92 MB |
| e4:25:e7:8a:d3:12 | 10.10.11.23 | 802.11ng | Excellent (35) | Marketing | 74.78 MB | 4.58 MB |
| 04:f7:e4:ef:68:05 | 10.10.11.71 | 802.11ng | Poor (12) | Marketing | 84.84 KB | 119.32 KB |
| Close | | | | | | |

Click the  icon to configure each client

| AP Details | |
|-----------------------------------|---|
| Serial Number | 1111-2222-3333 |
| MAC Address | 00:1A:DD:BD:73:E0 |
| Product Name | Pepwave AP Pro Duo |
| Name | |
| Location | |
| Firmware Version | 3.5.2 |
| Firmware Pack | Default (None) ▾ |
| AP Client Limit | <input checked="" type="radio"/> Follow AP Profile <input type="radio"/> Custom |
| 2.4 GHz SSID List | T4Open |
| 5 GHz SSID List | T4Open |
| Last config applied by controller | Mon Nov 23 11:25:03 HKT 2015 |
| Uptime | Wed Nov 11 15:00:27 HKT 2015 |
| Current Channel | 1 (2.4 GHz) 153 (5 GHz) |
| Channel | 2.4 GHz: Follow AP Profile ▾ 5 GHz: Follow AP Profile ▾ |
| Output Power | 2.4 GHz: Follow AP Profile ▾ 5 GHz: Follow AP Profile ▾ |
| Close | |

For easier network management, you can give each client a name and designate its location. You can also designate which firmware pack (if any) this client will follow, as well as the channels on which the client will broadcast.

Click the  icon to see a graph displaying usage:



Click any point in the graphs to display detailed usage and client information for that device, using that SSID, at that point in time. On the **Data Usage by** menu, you can display the information by SSID or by AP send/receive rate.

Click the **Event** tab next to **Wireless Usage** to view a detailed event log for that particular device:

| Event Information | |
|-------------------|--|
| Events | |
| Jan 2 11:53:39 | Client 00:26:BB:08:AC:FD associated with Wireless_11a |
| Jan 2 11:39:31 | Client 60:67:20:24:B6:4C disassociated from Marketing_11a |
| Jan 2 11:16:55 | Client A8:BB:CF:E1:0F:1E disassociated from Balance_11a |
| Jan 2 11:11:54 | Client A8:BB:CF:E1:0F:1E associated with Balance_11a |
| Jan 2 11:10:45 | Client 60:67:20:24:B6:4C associated with Marketing_11a |
| Jan 2 11:00:36 | Client 00:21:6A:35:59:A4 associated with Balance_11a |
| Jan 2 11:00:20 | Client 60:67:20:24:B6:4C disassociated from Marketing_11a |
| Jan 2 10:59:09 | Client 00:21:6A:35:59:A4 disassociated from Balance_11a |
| Jan 2 10:42:28 | Client F4:B7:E2:16:35:E9 associated with Balance_11a |
| Jan 2 10:29:12 | Client 84:7A:88:78:1E:4B associated with Balance_11a |
| Jan 2 10:24:27 | Client 90:B9:31:0D:11:EC disassociated from Marketing_11a |
| Jan 2 10:24:27 | Client 90:B9:31:0D:11:EC roamed to Marketing_11a at 2830-BFC8-D230 |
| Jan 2 10:13:22 | Client E8:8D:28:A8:43:93 associated with Balance_11a |
| Jan 2 10:13:22 | Client E8:8D:28:A8:43:93 roamed to Balance_11a from 2830-BF7F-694C |
| Jan 2 10:07:52 | Client CC:3A:61:89:07:F3 associated with Wireless_11a |
| Jan 2 10:04:35 | Client 60:67:20:24:B6:4C associated with Marketing_11a |
| Jan 2 10:03:38 | Client 60:67:20:24:B6:4C disassociated from Marketing_11a |
| Jan 2 09:58:27 | Client 00:26:BB:08:AC:FD disassociated from Wireless_11a |
| Jan 2 09:52:46 | Client 00:26:BB:08:AC:FD associated with Wireless_11a |
| Jan 2 09:20:26 | Client 8C:3A:E3:3F:17:62 associated with Balance_11a |
| More... | |
| Close | |

Wireless SSID

In-depth SSID reports are available under **AP > Controller Status > Wireless SSID**.



Click the blue arrow on any SSID to obtain more detailed usage information on each SSID.

Wireless Client

You can search for specific Wi-Fi users by navigating to **AP > Controller Status > Wireless Client**.

Search Filter

| | |
|------------------------------|--|
| Search Key | Client MAC Address / SSID / AP Serial Number |
| Maximum Result (1-256) | 50 |
| Show Associated Clients Only | <input type="checkbox"/> |
| Search Result | |

Search

Wireless Clients

| Name / MAC Address | IP Address | Type | Mode | RSSI (dBm) | SSID | AP | Duration |
|---------------------|------------|----------|------|------------|------|----|----------|
| HUAWEI_Mate_40_P... | - | 802.11ng | - | - | - | - | - |

Top 10 Clients of last hour (Updated at 16:00)

| Client | Upload | Download |
|----------------|--------|----------|
| No information | | |

Here, you will be able to see your network's heaviest users as well as search for specific users.

Click the ☆ icon to bookmark specific users, and click the 📊 icon for additional details about each user:



Mesh / WDS

Mesh / WDS allows you to monitor the status of your wireless distribution system (WDS) or Mesh, and track activity by MAC address by navigating to **AP > Controller Status > Mesh / WDS**. This table shows the detailed information of each AP, including protocol, transmit rate (sent / received), signal strength, and duration.


| Mesh / WDS | | | | | | |
|-----------------|----------|----------|-------------|----------------|--------------|----------|
| Type ^ | Peer MAC | Protocol | Rate (Send) | Rate (Receive) | Signal (dBm) | Duration |
| ▼ APOACH-HW1/ | | | | | | |
| Mesh () | | 802.11ac | 325M | 650M | -56 | 19:13:35 |
| ▼ APOACH-HW2/ | | | | | | |
| Mesh () | | 802.11ac | 650M | 351M | -63 | 00:49:20 |
| Mesh () | | 802.11ac | 390M | 325M | -67 | 01:35:09 |
| ▼ APOE-HW1/ | | | | | | |
| Mesh () | | 802.11ac | 58.5M | 130M | -69 | 00:45:22 |
| ▼ APOR-HW1/ | | | | | | |
| Mesh () | | 802.11ac | 325M | 866.7M | -53 | 19:14:44 |
| ▼ B20X-MESH-GW/ | | | | | | |
| Mesh () | | 802.11ac | 433M | 650M | -69 | 19:14:44 |
| Mesh () | | 802.11ac | 325M | 390M | -66 | 01:35:42 |
| Mesh () | | 802.11ac | 351M | 650M | -70 | 19:13:45 |
| Mesh () | | 802.11ac | 130M | 117M | -88 | 00:45:52 |

Network Graph





Nearby Device

A listing of near devices can be accessed by navigating to **AP > Controller Status > Nearby Device**.

| Suspected Rogue APs | | | | | |
|---------------------|-------------------------|---------|------------|----------------|---|
| BSSID | SSID | Channel | Encryption | Last Seen | Mark as |
| 00:1A:DD:EC:25:22 | Wireless | 11 | WPA2 | 10 hours ago |   |
| 00:1A:DD:EC:25:23 | Accounting | 11 | WPA2 | 10 hours ago |   |
| 00:1A:DD:EC:25:24 | Marketing | 11 | WPA2 | 11 hours ago |   |
| 00:03:7F:00:00:00 | MYB1PUSH | 1 | WPA & WPA2 | 11 minutes ago |   |
| 00:03:7F:00:00:01 | MYB1 | 1 | WPA2 | 15 minutes ago |   |
| 00:1A:DD:B9:60:88 | PEPWAVE_CB7E | 1 | WPA & WPA2 | 5 minutes ago |   |
| 00:1A:DD:BB:09:C1 | Micro_S1_1 | 6 | WPA & WPA2 | 1 hour ago |   |
| 00:1A:DD:BB:52:A8 | MAX HD2 Gobi | 11 | WPA & WPA2 | 2 minutes ago |   |
| 00:1A:DD:BF:75:81 | PEPLINK_05B5 | 4 | WPA & WPA2 | 1 minute ago |   |
| 00:1A:DD:BF:75:82 | LK_05B5 | 4 | WPA2 | 1 minute ago |   |
| 00:1A:DD:BF:75:83 | LK_05B5_VLAN22 | 4 | WPA2 | 1 minute ago |   |
| 00:1A:DD:C1:ED:E4 | dev_captive_portal_test | 1 | WPA & WPA2 | 3 minutes ago |   |
| 00:1A:DD:C2:E4:C5 | PEPWAVE_7052 | 11 | WPA & WPA2 | 2 hours ago |   |
| 00:1A:DD:C3:F1:64 | dev_captive_portal_test | 6 | WPA & WPA2 | 6 minutes ago |   |
| 00:1A:DD:C4:DC:24 | ssid_test | 8 | WPA & WPA2 | 2 minutes ago |   |
| 00:1A:DD:C4:DC:25 | SSID New | 8 | WPA & WPA2 | 2 minutes ago |   |
| 00:1A:DD:C5:46:04 | Guest SSID | 9 | WPA2 | 2 minutes ago |   |
| 00:1A:DD:C5:47:04 | PEPWAVE_67B8 | 1 | WPA & WPA2 | 5 minutes ago |   |
| 00:1A:DD:C5:4E:24 | G BR1 Portal | 2 | WPA2 | 2 minutes ago |   |
| 00:1A:DD:C6:9A:48 | ssid_test | 8 | WPA & WPA2 | 2 hours ago |   |

Suspected Rogue Devices

Hovering over the device MAC address will result in a popup with information on how this device was detected. Click the   icons and the device will be moved to the bottom table of identified devices.

Event Log

You can access the AP Controller Event log by navigating to **AP > Controller Status > Event Log**.

| Filter | |
|---------------------------------------|--|
| Search key | <input type="text" value="Client MAC Address / Wireless SSID / AP Serial Number / AP Profile Name"/> |
| Time | From <input type="text" value=""/> hh:mm to <input type="text" value=""/> hh:mm |
| Alerts only | <input type="checkbox"/> |
| <input type="button" value="Search"/> | |

| Events | | View Alerts |
|----------------|--|-------------------------|
| Jan 2 11:01:11 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 11:00:42 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 11:00:38 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 11:00:36 | AP One 300M: Client 00:21:6A:35:59:A4 associated with Balance_11a | |
| Jan 2 11:00:20 | AP One 300M: Client 60:67:20:24:B6:4C disassociated from Marketing_11a | |
| Jan 2 11:00:09 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:59:09 | AP One 300M: Client 00:21:6A:35:59:A4 disassociated from Balance_11a | |
| Jan 2 10:59:08 | Office Fiber AP: Client 18:00:2D:3D:4E:7F associated with Balance | |
| Jan 2 10:58:53 | Michael's Desk: Client 18:00:2D:3D:4E:7F disassociated from Wireless | |
| Jan 2 10:58:18 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:58:03 | Office InWall: Client 10:BF:48:E9:76:C7 associated with Wireless | |
| Jan 2 10:57:47 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:57:19 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:57:09 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:56:48 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:56:39 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| Jan 2 10:56:19 | AP One 300M: Client 00:26:BB:05:84:A4 associated with Marketing_11a | |
| Jan 2 10:56:09 | AP One 300M: Client 9C:04:EB:10:39:4C associated with Marketing_11a | |
| Jan 2 10:55:42 | AP One 300M: Client 54:EA:A8:2D:A0:D5 disassociated from Marketing_11a | |
| Jan 2 10:55:29 | AP One 300M: Client 54:EA:A8:2D:A0:D5 associated with Marketing_11a | |
| | | More... |

Events


This event log displays all activity on your AP network, down to the client level. Use to filter box to search by MAC address, SSID, AP Serial Number, or AP Profile name. Click **View Alerts** to see only alerts, and click the **More...** link for additional records.

Ch27. Toolbox

Tools for managing firmware packs can be found at **AP>Toolbox**.



Firmware Packs

Here, you can manage the firmware of your AP. Clicking on  will result in information regarding each firmware pack. To receive new firmware packs, you can click **Check for Updates** to download new packs, or you can click **Manual Upload** to manually upload a firmware pack. Click **Default** to define which firmware pack is default.

Ch28. System Settings

Admin Security (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/admin-security/>)

Firmware (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/firmware/>)

Time (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/time/>)

Schedule (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/schedule/>)

Email Notification (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/email-notification/>)

Event Log (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/event-log/>)

SNMP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/snmp/>)

SMS Control (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/sms-control/>)

InControl (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/incontrol/>)

Configuration (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/configuration/>)

Feature Add-ons (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch28-system-settings/feature-add-ons/>)

Admin Security

There are two types of user accounts available for accessing the web admin: *admin* and *user*. They represent two user levels: the admin level has full administrative access, while the user level is read-only. The user level can access only the device's status information; users cannot make any changes on the device.

A web login session will be logged out automatically when it has been idle longer than the **Web Session Timeout**. Before the session expires, you may click the **Logout** button in the web admin to exit the session.

0 hours 0 minutes signifies an unlimited session time. This setting should be used only in special situations, as it will lower the system security level if users do not log out before closing the browser. The **default** is 4 hours, 0 minutes.

For security reasons, after logging in to the web admin Interface for the first time, it is recommended to change the administrator password. Configuring the administration interface to be accessible only from the LAN can further improve system security. Administrative settings configuration is located at **System>Admin Security**.

Admin Settings

Device Name

MAX-BR1- hostname: max-br1

This configuration is being managed by InControl.

Admin User Name

admin

Admin Password

Confirm Admin Password

Read-only User Name

user

Read-only Password

Confirm Read-only Password

Web Session Timeout

4 Hours 0 Minutes

Authentication Method

☒ Local Account ☐ RADIUS ☐ TACACS+

CLI SSH & Console

☒ Enable

CLI SSH Access

LAN Only

CLI SSH Port

8822

CLI SSH Access Public Key

Admin Users: (Disabled) [configure](#)
Read-only Users: (Disabled) [configure](#)

Security

HTTP / HTTPS ☒ Redirect HTTP to HTTPS

Web Admin Access

HTTP: LAN / WAN HTTPS: LAN / WAN

Web Admin Port

HTTP: 80 HTTPS: 443

LAN Connection Access Settings

Allowed LAN Networks

☒ Any ☐ Allow this network only

WAN Connection Access Settings

Allowed Source IP Subnets

☒ Any ☐ Allow access from the following IP subnets only

Allowed WAN IP Address(es)

Connection / IP Address(es)

All Clear

☐ WAN

☐ Cellular

☐ Wi-Fi WAN on 2.4 GHz

☐ Wi-Fi WAN on 5 GHz

☐ VLAN WAN 1

☐ OpenVPN WAN 1

Save

Admin Settings

Device Name This field allows you to define a name for this Pepwave router. By default, **Device Name** is set as **MAX_XXXX**, refers to the last 4 digits of the unit's serial number.

Admin User Name **Admin User Name** is set as *admin* by default, but can be changed, if desired.

| | |
|-----------------------------------|--|
| Admin Password | This field allows you to specify a new administrator password. |
| Confirm Admin Password | This field allows you to verify and confirm the new administrator password. |
| Read-only User Name | Read-only User Name is set as <i>user</i> by default, but can be changed, if desired. |
| Read-only Password | This field allows you to specify a new user password. Once the user password is set, the read-only user feature is enabled. |
| Confirm Read-only Password | This field allows you to verify and confirm the new user password. |
| Web Session Timeout | This field specifies the number of hours and minutes that a web session can remain idle before the Pepwave terminates its access to the web admin interface. By default, it is set to 4 hours . |

Authentication Method

With this box is checked, the web admin will authenticate using an external RADIUS server. Authenticated use as either “admin” with full read-write permission or “user” with read-only access. Local admin and user account disabled. When the device is not able to communicate with the external RADIUS server, local accounts will be for emergency access. Additional authentication options will be available once this box is checked.

Available options:

- Local Account
- RADIUS

| | |
|-------------------------|--|
| Authentication Method | <input type="radio"/> Local Account <input checked="" type="radio"/> RADIUS <input type="radio"/> TACACS+ |
| Authentication Protocol | MS-CHAP v2 |
| | You may click here to define RADIUS Server Authentication profile, or you may go to RADIUS Server page to define multiple profiles |
| Authentication Host | |
| Authentication Port | 1812 |
| Authentication Secret | <input type="password"/> <input checked="" type="checkbox"/> Hide Characters |
| | You may click here to define RADIUS Server Accounting profile, or you may go to RADIUS Server page to define multiple profiles |
| Accounting Host | |
| Accounting Port | 1813 |
| Accounting Secret | <input type="password"/> <input checked="" type="checkbox"/> Hide Characters |
| Authentication Timeout | 3 seconds |

| | |
|-------------------------|---|
| Authentication Protocol | This specifies the authentication protocol used. Available options are MS-CHAP |
| Authentication Host | This specifies the IP address or hostname of the RADIUS server host. |
| Authentication Port | This setting specifies the UDP destination port for authentication requests. |
| Authentication Secret | This field is for entering the secret key for accessing the RADIUS server. |
| Accounting Host | This specifies the IP address or hostname of the RADIUS server host. |
| Accounting Port | This setting specifies the UDP destination port for accounting requests. |
| Accounting Secret | This field is for entering the secret key for accessing the accounting server. |
| Authentication Timeout | This option specifies the time value for authentication timeout |

- TACACS+

| | |
|------------------------|---|
| Authentication Method | <input type="radio"/> Local Account <input type="radio"/> RADIUS <input checked="" type="radio"/> TACACS+ |
| TACACS+ Server | |
| TACACS+ Server Secret | <input type="password"/> <input checked="" type="checkbox"/> Hide Characters |
| TACACS+ Server Timeout | 3 seconds |

| | |
|------------------------|--|
| TACACS+ Server | This specifies the access address of the external TACACS+ server. |
| TACACS+ Server Secret | This field is for entering the secret key for accessing the RADIUS server. |
| TACACS+ Server Timeout | This option specifies the time value for TACACS+ timeout |

CLI SSH & Console

The CLI (command line interface) can be accessed via SSH. This field enables CLI support. For additional information regarding CLI, please refer to **Section** (https://docs.google.com/document/d/1Vp7p6ElA8pgmy5zbnxpQKqcxCyEaT3QWyxMtVTpwUic/edit#heading=

| | |
|----------------------------------|--|
| CLI SSH Access | This menu allows you to choose between granting access to LAN and WAN clients, or to LAN clients only. |
| CLI SSH Port | This field determines the port on which clients can access CLI SSH. |
| CLI SSH Access Public Key | This field is for entering the Public Key for Admin Users and Read-only Users to access CLI SSH. |
| Security | <p>This option is for specifying the protocol(s) through which the web admin interface can be accessed:</p> <ul style="list-style-type: none"> ◦ HTTP ◦ HTTPS ◦ HTTP/HTTPS <p>HTTP to HTTPS redirection is enabled by default to force HTTPS access to the web admin interface.</p> |
| Web Admin Access | <p>This option is for specifying the network interfaces through which the web admin interface can be accessed:</p> <ul style="list-style-type: none"> ◦ LAN only ◦ LAN/WAN <p>If LAN/WAN is chosen, the WAN Connection Access Settings form will be displayed.</p> |
| Web Admin Port | This field is for specifying the port number on which the web admin interface can be accessed. |

WAN Connection Access Settings

Allowed Source IP Subnets
?

☐ Any
☒ Allow access from the following IP subnets only

Allowed WAN IP Address(es)

Connection / IP Address(es)

AllClear

☒ WAN 1

☒ 10.88.3.158 (Interface IP)

☐ WAN 2

☐ Wi-Fi WAN

☐ Cellular 1

☐ Cellular 2

☐ USB

WAN Connection Access Settings

Allowed Source IP Subnets

This field allows you to restrict web admin access only from defined IP subnets.

- **Any** – Allow web admin accesses to be from anywhere, without IP address restriction.
- **Allow access from the following IP subnets only** – Restrict web admin access only from the defined IP subnets. When this is chosen, a text input area will be displayed beneath:

The allowed IP subnet addresses should be entered into this text area. Each IP subnet must be in form of *w.x.y.z/m*, where *w.x.y.z* is an IP address (e.g., *192.168.0.0*), and *m* is the subnet mask in CIDR format, which is between 0 and 32 inclusively (For example, *192.168.0.0/24*).

To define multiple subnets, separate each IP subnet one in a line. For example:

- 192.168.0.0/24
- 10.8.0.0/16

Allowed WAN IP Address(es)

This is to choose which WAN IP address(es) the web server should listen on.

Firmware

Web admin interface : automatically check for updates

Upgrading firmware can be done in one of three ways.

Using the router's interface to automatically check for an update, using the router's interface to manually upgrade the firmware, or using InControl2 to push an upgrade to a router.

The automatic upgrade can be done from **System > Firmware**.



If an update is found the buttons will change to allow you to **Download and Update** the firmware.



Click on the **Download and Upgrade** button. A prompt will be displayed advising to download the Current Active Configuration. Please click on the underlined download text. After downloading the current config click the **Ok** button to start the upgrade process.

The router will download and then apply the firmware. The time that this process takes will depend on your internet connection's speed.



The firmware will now be applied to the router*. The amount of time it takes for the firmware to upgrade will also depend on the router that's being upgraded.

Firmware Upgrade
It may take up to 8 minutes.



**Upgrading the firmware will cause the router to reboot.*

Web admin interface : install updates manually

In some cases, a special build may be provided via a ticket or it may be found in the forum. Upgrading to the special build can be done using this method, or using IC2 if you are using that to manage your firmware upgrades. A manual upgrade using the GA firmware posted on the site may also be recommended or required for a couple of reasons.

All of the Peplink/Pepwave GA firmware can be found here (<https://www.peplink.com/support/downloads/>) Navigate to the relevant product line (ie. Balance, Max, FusionHub, SOHO, etc). Some product lines may have a dropdown that lists all of the products in that product line. Here is a screenshot from the Balance line.

| Balance | | | | | |
|------------------------------|-------------------|------------------|--------------------------|---------------------|---------------------|
| Product ▼ | | | | | |
| Search: <input type="text"/> | | | | | |
| Product | Hardware Revision | Firmware Version | Download Link | Release Notes | User Manual |
| Balance 1350 | HW2 | 7.1.2 | Download | PDF | PDF |
| Balance 1350 | HW1 | 6.3.4 | Download | PDF | PDF |
| Balance 20 | HW1-6 | 7.1.2 | Download | PDF | PDF |
| Balance 210 | HW4 | 7.1.2 | Download | PDF | PDF |

If the device has more than one firmware version the current hardware revision will be required to know what firmware to download.


Navigate to System > Firmware and click the Choose File button under the Manual Firmware Upgrade section. Navigate to the location that the firmware was downloaded to select the ".img" file and click the Open button.

Click on the Manual Upgrade button to start the upgrade process.



A prompt will be displayed advising to download the Current Active Configuration. Please click on the underlined download text. After downloading the current config click the Ok button to start the upgrade process. The firmware will now be applied to the router*. The amount of time it takes for the firmware to upgrade will depend on the router that's being upgraded.

Firmware Upgrade
It may take up to 8 minutes.




**Upgrading the firmware will cause the router to reboot.*

The InControl method

Described in this knowledgebase article on our forum. (<https://forum.peplink.com/t/upgrading-firmware-the-incontrol2-method/>)

Time

Time Settings enables the system clock of the Pepwave router to be synchronized with a specified time server. Time settings are located at **System>Time**.

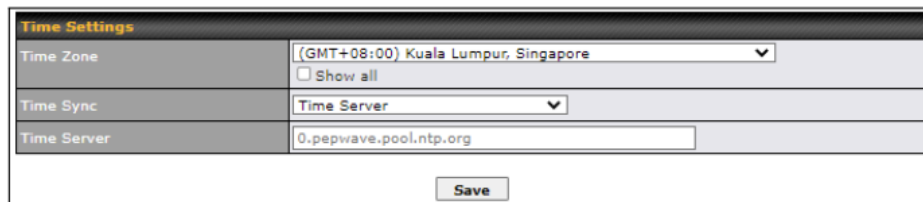

| Time Settings | |
|-------------------------------------|---|
| Time Zone | (GMT+08:00) Kuala Lumpur, Singapore <input type="button" value="Show all"/> |
| Time Sync | Time Server |
| Time Server | 0.pepwave.pool.ntp.org |
| <input type="button" value="Save"/> | |

Time Settings

Time Zone This specifies the time zone (along with the corresponding Daylight Savings Time scheme). The **Time Zone** value affects the time stamps in the Pepwave router's event log and e-mail notifications. Check **Show all** to show all time zone options.

Time Sync This field allows to select your time sync mode, the available options are:

- Time Server
- GPS
- GPS with Time Server as fallback

Time Server This setting specifies the NTP network time server to be utilized by the Pepwave router.

Schedule

Enable and disable different functions (such as WAN connections, outbound policy, and firewalls) at different times, based on a user-scheduled configuration profile. The settings for this are located at **System > Schedule**



| Name | Time | Used by |
|---|------|---------|
| No schedule profiles defined | | |
| <input type="button" value="New Schedule"/> | | |

Enable scheduling, and then click on your schedule name or on the **New Schedule** button to begin.

Edit schedule profile

Schedule Settings

| | |
|----------|--|
| Enable | <input checked="" type="checkbox"/> <div>The schedule function of those associated features will be lost if profile is disabled.</div> |
| Name | Weekdays Only |
| Schedule | Weekdays only |
| Used by | You may go to supported feature settings page and set this profile as scheduler. |

Schedule Map

| | Midnight | 4am | 8am | Noon | 4pm | 8pm |
|-----------|----------|-----|-----|------|-----|-----|
| Sunday | x | x | x | x | x | x |
| Monday | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Tuesday | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Wednesday | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Thursday | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Friday | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Saturday | x | x | x | x | x | x |

Save

Cancel

Edit Schedule Profile

- Enabling

Click this checkbox to enable this schedule profile. Note that if this is disabled, then any associated features will also have their scheduling disabled.
- Name

Enter your desired name for this particular schedule profile.
- Schedule

Click the drop-down menu to choose pre-defined schedules as your starting point. Please note that upon selection, previous changes on the schedule map will be deleted.
- Schedule Map

Click on the desired times to enable features at that time period. You can hold your mouse for faster entry.

Email Notification

Email notification functionality provides a system administrator with up-to-date information on network status. The settings for configuring email notifications are found at **System>Email Notification**.

Email Notification Setup

Email Notification

☒ Enable

SMTP Server

smtp.mycompany.com

☒ Require authentication

Connection Security

SSL/TLS (Note: any server certificate will be accepted)

SMTP Port

465

SMTP User Name

smtpuser

SMTP Password

Confirm SMTP Password

Sender's Email Address

admin@mycompany.com

Recipient's Email Address

system@mycompany.com
staff@mycompany.com

Test Email Notification

Save

Email Notification Settings

| | |
|----------------------------------|--|
| Email Notification | This setting specifies whether or not to enable email notification. If Enable is checked, the Pepwave router will send email messages to system administrators when the WAN status changes or when new firmware is available. If Enable is not checked, email notification is disabled and the Pepwave router will not send email messages. |
| SMTP Server | This setting specifies the SMTP server to be used for sending email. If the server requires authentication, check Require authentication . |
| Connection Security | <p>This setting specifies via a drop-down menu one of the following valid Connection Security:</p> <ul style="list-style-type: none">◦ None◦ STARTTLS◦ SSL/TLS |
| SMTP Port | <p>This field is for specifying the SMTP port number. By default, this is set to 25. If Connection Security is selected "STARTTLS", the default port number will be set to 587. If Connection Security is selected "SSL/TLS", the default port number will be set to 465.</p> <p>You may customize the port number by editing this field.</p> |
| SMTP User Name / Password | This setting specifies the SMTP username and password while sending email. These options are shown only if Require authentication is checked in the SMTP Server setting. |
| Confirm SMTP Password | This field allows you to verify and confirm the new administrator password. |
| Sender's Email Address | This setting specifies the email address the Pepwave router will use to send reports. |
| Recipient's Email Address | This setting specifies the email address(es) to which the Pepwave router will send email notifications. For multiple recipients, separate each email addresses using the enter key. |

After you have finished setting up email notifications, you can click the **Test Email Notification** button to test the settings before saving. After **Test Email Notification** is clicked, you will see this screen to confirm the settings:

| Test Email Notification | |
|---------------------------|---|
| SMTP Server | smtp.mycompany.com |
| SMTP Port | 465 |
| SMTP UserName | smtpuser |
| Sender's Email Address | admin@mycompany.com |
| Recipient's Email Address | system@mycompany.com staff@mycompany.com |

Click **Send Test Notification** to confirm. In a few seconds, you will see a message with detailed test results.

Test email sent.
(NOTE: Settings are not saved. To confirm the update, click 'Save' button.)

Email Notification Setup

| | |
|---------------------------|--|
| Email Notification | <input checked="" type="checkbox"/> Enable |
| SMTP Server | <input type="text"/> <input checked="" type="checkbox"/> Require authentication |
| Connection Security | SSL/TLS (Note: any server certificate will be accepted) |
| SMTP Port | 465 |
| SMTP User Name | <input type="text"/> |
| SMTP Password | <input type="password"/> |
| Confirm SMTP Password | <input type="password"/> |
| Sender's Email Address | <input type="text"/> |
| Recipient's Email Address | <input type="text"/> |

Test Email Notification

Save

Test Result

```
[INFO] Try email through auto detected connection
[INFO] SMTP through SSL connected
<- 220 smtp.gmail.com ESMTP h11sm3907691pjjg.46 - gsmt
-> EHLO balance.peplink.com
<- 250-smtp.gmail.com at your service, [14.192.209.255]
<- 250-SIZE 35882577
<- 250-8BITMIME
<- 250-AUTH LOGIN PLAIN XOAUTH2 PLAIN-CLIENTTOKEN OAUTHBEARER XOAUTH
<- 250-ENHANCEDSTATUSCODES
<- 250-PIPELINING
<- 250-CHUNKING
<- 250-SMTPUTF8
-> AUTH PLAIN AGdwc2dhbjk0QGdtVWlsLmNvbQBwdnJ6bWF6cGhtVXJpanpp
```

Event Log

Event log functionality enables event logging at a specified remote syslog server. The settings for configuring the remote system log can be found at **System > Event Log**.

Send Events to Remote Syslog Server

| | |
|------------------------|-----------------------------------|
| Remote Syslog | <input type="checkbox"/> |
| Remote Syslog Host | <input type="text"/> Port: 514 |
| Source Network Address | Untagged LAN |

Push Events to Mobile Devices

| | |
|-------------|--------------------------|
| Push Events | <input type="checkbox"/> |
|-------------|--------------------------|

URL Logging

| | |
|--------|--------------------------|
| Enable | <input type="checkbox"/> |
|--------|--------------------------|


Session Logging

| | |
|--------|--------------------------|
| Enable | <input type="checkbox"/> |
|--------|--------------------------|

Save

Event Log Settings

| | |
|---------------------------|--|
| Remote Syslog | This setting specifies whether or not to log events at the specified remote syslog server. |
| Remote Syslog Host | This setting specifies the IP address or hostname of the remote syslog server. |
| Push Events | The Pepwave router can also send push notifications to mobile devices that have our Mobile Router Utility installed. Check the box to activate this feature. |

| | |
|---|---|
| URL Logging | This setting is to enable event logging at the specified log server. |
| URL Logging Host | This setting specifies the IP address or hostname of the URL log server. |
| Session Logging | This setting is to enable event logging at the specified log server. |
| Session Logging Host | This setting specifies the IP address or hostname of the Session log server. |
|  | For more information on the Router Utility, go to: |
| | www.peplink.com/products/router-utility http://www.peplink.com/products/router-utility |

SNMP

SNMP or simple network management protocol is an open standard that can be used to collect information about the Pepwave router. SNMP configuration is located at **System>SNMP**.

| SNMP Settings | |
|-------------------------------------|---|
| SNMP Device Name | MAX_TST_3D8B |
| Location | <input type="text"/> |
| SNMP Port | <input type="text" value="161"/> <input type="button" value="Default"/> |
| SNMPv1 | <input type="checkbox"/> Enable |
| SNMPv2c | <input type="checkbox"/> Enable |
| SNMPv3 | <input type="checkbox"/> Enable |
| SNMP Trap | <input checked="" type="checkbox"/> Enable |
| SNMP Trap Community | <input type="text"/> |
| SNMP Trap Server | <input type="text"/> |
| SNMP Trap Port | <input type="text" value="162"/> |
| SNMP Trap Server Heartbeat | <input type="checkbox"/> |
| <input type="button" value="Save"/> | |

| Community Name | Allowed Source Network | Access Mode |
|---|------------------------|-------------|
| No SNMPv1 / SNMPv2c Communities Defined | | |
| <input type="button" value="Add SNMP Community"/> | | |

| SNMPv3 User Name | Authentication / Privacy | Access Mode |
|--|--------------------------|-------------|
| No SNMPv3 Users Defined | | |
| <input type="button" value="Add SNMP User"/> | | |

SNMP Settings

| | |
|-------------------------|--|
| SNMP Device Name | This field shows the router name defined at System>Admin Security . |
| SNMP Port | This option specifies the port which SNMP will use. The default port is 161 . |
| SNMPv1 | This option allows you to enable SNMP version 1. |
| SNMPv2 | This option allows you to enable SNMP version 2. |

| | |
|-----------------------------------|--|
| SNMPv3 | This option allows you to enable SNMP version 3. |
| SNMP Trap | This option allows you to enable SNMP Trap. If enabled, the following entry fields will appear. |
| SNMP Trap Community | This setting specifies the SNMP Trap community name. |
| SNMP Trap Server | Enter the IP address of the SNMP Trap server. |
| SNMP Trap Port | This option specifies the port which the SNMP Trap server will use. The default port is 162 . |
| SNMP Trap Server Heartbeat | This option allows you to enable and configure the heartbeat interval for the SNMP Trap server. |

To add a community for either SNMPv1 or SNMPv2, click the **Add SNMP Community** button in the **Community Name** table, upon which the following screen is displayed:




The dialog box titled "SNMP Community" contains two input fields. The first field, labeled "Community Name", has the text "My Company" entered. The second field, labeled "Allowed Network", contains "192.168.1.25" followed by a dropdown menu showing "/ 255.255.255.0 (/24)". At the bottom right of the dialog are "Save" and "Cancel" buttons.

SNMP Community Settings

| | |
|--------------------------------------|--|
| Community Name | This setting specifies the SNMP community name. |
| Allowed Source Subnet Address | This setting specifies a subnet from which access to the SNMP server is allowed. Enter subnet address here (e.g., <i>192.168.1.0</i>) and select the appropriate subnet mask. |

To define a user name for SNMPv3, click **Add SNMP User** in the **SNMPv3 User Name** table, upon which the following screen is displayed:

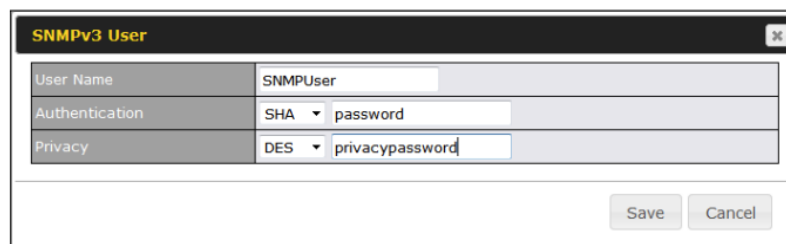

The dialog box titled "SNMPv3 User" contains three input fields. The first field, labeled "User Name", has the text "SNMPUser" entered. The second field, labeled "Authentication", has a dropdown menu set to "SHA" and a text box containing "password". The third field, labeled "Privacy", has a dropdown menu set to "DES" and a text box containing "privacypassword". At the bottom right of the dialog are "Save" and "Cancel" buttons.

SNMPv3 User Settings

| | |
|------------------|--|
| User Name | This setting specifies a user name to be used in SNMPv3. |
|------------------|--|

| | |
|--------------------------------|---|
| Authentication Protocol | <p>This setting specifies via a drop-down menu one of the following valid authentication protocols:</p> <ul style="list-style-type: none"> ◦ NONE ◦ MD5 ◦ SHA <p>When MD5 or SHA is selected, an entry field will appear for the password.</p> |
| Privacy Protocol | <p>This setting specifies via a drop-down menu one of the following valid privacy protocols:</p> <ul style="list-style-type: none"> ◦ NONE ◦ DES <p>When DES is selected, an entry field will appear for the password.</p> |

SMS Control

SMS Control allows the user to control the device using SMS even if the modem does not have a data connection. The settings for configuring the SMS Control can be found at **System>SMS Control**.

Supported Models

- **Balance/MAX:** *-LTE-E, *-LTEA-W, *-LTEA-P, *-LTE-MX
- **EPX:** *-LW*, *-LP*

| SMS Control | |
|-------------|--------------------------|
| Enable | <input type="checkbox"/> |

When this box is checked, the device will be allowed to take actions according to received commands via SMS.

Make sure your mobile plan supports SMS, and note that some plans may incur additional charges for this.

SMS Control can reboot devices and configure cellular settings over signalling channels, even if the modem does not have a data connection.

For details of supported SMS command sets, please refer to our knowledge base (https://download.peplink.com/resources/sms_control_command_reference.pdf).


| SMS Control | |
|-------------|---|
| Enable | <input checked="" type="checkbox"/> |
| Password | <input type="password"/> <input checked="" type="checkbox"/> Hide Characters |
| White List | <input type="text" value="Phone Number"/> <input type="button" value="+"/> |

Save

SMS Control Settings

| | |
|-------------------|---|
| Enable | Click the checkbox to enable the SMS Control. |
| Password | This setting sets the password for authentication – maximum of 32 characters, which cannot include semicolon (;). |
| White List | Optionally, you can add phone number(s) to the whitelist. Only matching phone numbers are allowed to issue SMS commands. Phone numbers must be in the E.164 International Phone Numbers format. |

InControl

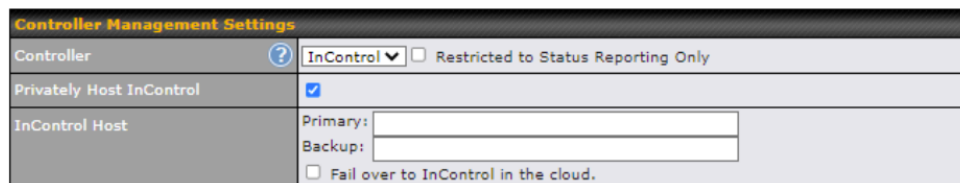

| Controller Management Settings | |
|--------------------------------|--|
| Controller ? | InControl <input type="checkbox"/> Restricted to Status Reporting Only |
| Privately Host InControl | <input checked="" type="checkbox"/> |
| InControl Host | Primary: <input type="text"/> Backup: <input type="text"/> <input type="checkbox"/> Fail over to InControl in the cloud. |

InControl is a cloud-based service which allows you to manage all of your Peplink and Pepwave devices with one unified system. With it, you can generate reports, gather statistics, and configure your devices automatically. All of this is now possible with InControl.

When this check box is checked, the device's status information will be sent to the Peplink InControl system. This device's usage data and configuration will be sent to the system if you enable the features in the system.

Alternatively, you can also privately host InControl. Simply check the “Privately Host InControl” box and enter the IP Address of your InControl Host. If you have multiple hosts, you may enter the primary and backup IP addresses for the InControl Host and tick the “Fail over to InControl in the cloud” box. The device will connect to either the primary InControl Host or the secondary/backup ICA/IC2.

You can sign up for an InControl account at <https://incontrol2.peplink.com/>. You can register your devices under the account, monitor their status, see their usage reports, and receive offline notifications.

Configuration

Backing up Pepwave router settings immediately after successful completion of initial setup is strongly recommended. The functionality to download and upload Pepwave router settings is found at **System>Configuration**. Note that available options vary by model.

Restore Configuration to Factory Settings?

Restore Factory Settings

Download Active Configurations?

Download

Upload Configurations?

Configuration File

Browse... No file selected.

Upload

Upload Configurations from High Availability Pair?

Configuration File

Browse... No file selected.

Upload

Configuration

Restore Configuration to Factory Settings

The **Restore Factory Settings** button is to reset the configuration to factory default settings. After clicking the button, you will need to click the **Apply Changes** button on the top right corner to make the settings effective.

Download Active Configurations

Click **Download** to backup the current active settings.

Upload Configurations

To restore or change settings based on a configuration file, click **Choose File** to locate the configuration file on the local computer, and then click **Upload**. The new settings can then be applied by clicking the **Apply Changes** button on the page header, or you can cancel the procedure by pressing **discard** on the main page of the web admin interface.

Upload Configurations from High Availability Pair

In a high availability (HA) configuration, a Pepwave router can quickly load the configuration of its HA counterpart. To do so, click the **Upload** button. After loading the settings, configure the LAN IP address of the Pepwave router so that it is different from the HA counterpart.

Feature Add-ons

Some Pepwave routers have features that can be activated upon purchase. Once the purchase is complete, you will receive an activation key. Enter the key in the **Activation Key** field, click **Activate**, and then click **Apply Changes**.


Feature Activation

Activation Key

Reboot

This page provides a reboot button for restarting the system. For maximum reliability, the Pepwave router can equip with two copies of firmware. Each copy can be a different version. You can select the firmware version you would like to reboot the device with. The firmware marked with **(Running)** is the current system boot up firmware.

Please note that a firmware upgrade will always replace the inactive firmware partition.

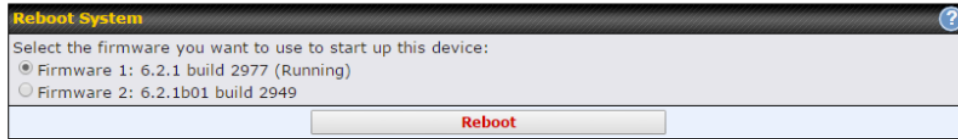

Ch29. Tools

Ping (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch29-tools/ping/>)

Traceroute Test (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch29-tools/traceroute-test/>)

SpeedFusion VPN Test (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch29-tools/speedfusion-vpn-test/>)

Wake-on-LAN (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch29-tools/wake-on-lan/>)

CLI (Command Line Interface Support) (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch29-tools/cli-command-line-interface-support/>)

Ping

The ping test tool sends pings through a specific Ethernet interface or a SpeedFusion™ VPN connection. You can specify the number of pings in the field **Number of times**, to a maximum number of 10 times. **Packet Size** can be set to a maximum of 1472 bytes. The ping utility is located at **System>Tools>Ping**, illustrated below:

```
Results Clear Log
PING 10.10.10.1 (10.10.10.1) from 10.88.3.158 56(84) bytes of data.
64 bytes from 10.10.10.1: icmp_req=1 ttl=62 time=27.6 ms
64 bytes from 10.10.10.1: icmp_req=2 ttl=62 time=26.5 ms
64 bytes from 10.10.10.1: icmp_req=3 ttl=62 time=28.9 ms
64 bytes from 10.10.10.1: icmp_req=4 ttl=62 time=28.3 ms
64 bytes from 10.10.10.1: icmp_req=5 ttl=62 time=27.7 ms

--- 10.10.10.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4005ms
rtt min/avg/max/mdev = 26.516/27.855/28.933/0.814 ms
```

A system administrator can use the ping utility to manually check the connectivity of a particular LAN/WAN connection.

The traceroute test tool traces the routing path to the destination through a particular Ethernet interface or a SpeedFusion™ connection. The traceroute test utility is located at **System>Tools>Traceroute**.

| Results | Clear Log |
|---|-----------|
| Unsubscribed to 994,2333,1289,999 (994,2333,1289,999), 992 (994,2333,1289,999), 992 (994,2333,1289,999) | |
| 1 125,961,1237,2334 (125,961,1237,2334) 9,7599 msg 9,4772 msg 9,2817 msg | |
| 2 125,999,999,2334 (125,999,999,2334) 9,9919 msg 9,1292 msg 9,4499 msg | |
| 3 125,999,999,1 (125,999,999,1) 9,1779 msg 9,1239 msg 9,9959 msg | |
| 4 125,999,99,2 (125,999,99,2) 9,1992 msg 9,1239 msg 9,1999 msg | |
| 5 125,1993,999,2334 (125,1993,999,2334) 9,1999 msg 1259,1779,2449,22 (1259,1779,2449,22) 9,7517 msg 1259,1993,999,2334 (1259,1993,999,2334) 9,4772 msg | |
| 6 1260,752,999,1239 (1260,752,999,1239) 9,9999 msg 1999,999,1239,99 (1999,999,1239,99) 9,2993 msg 9,2993 msg | |
| 7 1260,1239,9,1239 (1260,1239,9,1239) 9,9912 msg 7,4999 msg 7,4999 msg | |
| 8 1269,1779,999,1239 (1269,1779,999,1239) 9,9912 msg 1269,1239,99,1 (1269,1239,99,1) 9,4772 msg 1269,752,1239,1239 (1269,752,1239,1239) 9,2993 msg | |
| 9 1269,1239,99,1239 (1269,1239,99,1239) 9,1239 msg 752,124,1239,2449 (752,124,1239,2449) 9,4912 msg 1269,1239,99,1239 (1269,1239,99,1239) 9,4779 msg | |
| 10 752,124,1239,2449 (752,124,1239,2449) 9,9942 msg 754,1239,999,1239 (754,1239,999,1239) 9,9777 msg 752,124,1239,2449 (752,124,1239,2449) 9,9999 msg | |
| 11 752,124,1239,2449 (752,124,1239,2449) 9,9999 msg 1269,999,1239,1239 (1269,999,1239,1239) 7,1219 msg 1269,999,1249,2449 (1269,999,1249,2449) 9,4999 msg | |
| 12 1269,999,1239,1219 (1269,999,1239,1219) 9,9712 msg 1269,999,1249,1249 (1269,999,1249,1249) 9,9999 msg 9,9999 msg | |
| 13 1249,1239,1249,1219 (1249,1239,1249,1219) 9,9912 msg ** 7,1219 msg | |
| 14 994,2333,1289,999 (994,2333,1289,999) 9,1779 msg 9,1249 msg 9,9912 msg | |

A system administrator can use the traceroute utility to analyze the connection path of a LAN/WAN connection.

Wake-on-LAN

Peplink routers can send special “magic packets” to any client specified from the Web UI. To access this feature, navigate to **System > Tools > Wake-on-LAN**

| Wake-on-LAN | |
|--------------------|--|
| Wake-on-LAN Target | Surf_SOHO (00:90:0B:36:3C:8C) ▼ Send |

Select a client from the drop-down list and click **Send** to send a “magic packet”

WAN Analysis

The WAN Analysis feature allows you to run a WAN to WAN speed test between 2 Peplink devices .

You can set a device up as a **Server** or a **Client**. One device must be set up as a server to run the speed tests and the server must have a public IP address.

WAN Performance Analysis

Check your point-to-point WAN performance with another peer

**As a server**
For the peer who has public IP addresses to accept connection.

**As a client**
For the peer to initiate connection.

The default port is 6000 and can be changed if required. The IP address of the WAN interface will be shown in the **WAN Connection Status** section.

WAN Performance Analysis

Check your point-to-point WAN performance with another peer

Server Settings

| | |
|--------------|--|
| Status | <input checked="" type="checkbox"/> Listening (Control Port: 6000) |
| Control Port | 6000 |

Apply Stop

WAN Connection Status

| | |
|-------------------|---|
| 1 WAN 1 | <input checked="" type="checkbox"/> 10.22.1.182 |
| 2 WAN 2 | <input type="checkbox"/> Disabled |
| 3 WAN 3 | <input type="checkbox"/> Disabled |
| 4 WAN 4 | <input type="checkbox"/> Disabled |
| 5 WAN 5 | <input type="checkbox"/> Disabled |
| 6 Mobile Internet | <input type="checkbox"/> Disabled |

The client side has a few more settings that can be changed. Make sure that the **Control Port** matches what’s been entered on the server side. Select the WAN(s) that will be used for testing and enter the Servers WAN IP address. Once all of the options have been set, click the **Start Test** button.

WAN Performance Analysis

Check your point-to-point WAN performance with another peer

Client Settings


| | |
|--------------|--|
| Control Port | 6000 |
| Data Port | 57280 - 57287 |
| Type | <input checked="" type="radio"/> TCP <input type="radio"/> UDP |
| Direction | <input checked="" type="radio"/> Upload <input type="radio"/> Download |
| Duration | 20 seconds (5 - 600) |

Data Streams

| Local WAN Connection | Remote IP Address |
|----------------------|-------------------|
| 1. -- Not Used -- | |
| 2. -- Not Used -- | |
| 3. -- Not Used -- | |
| 4. -- Not Used -- | |
| 5. -- Not Used -- | |
| 6. -- Not Used -- | |
| 7. -- Not Used -- | |
| 8. -- Not Used -- | |

Start Test

The test output will show the **Data Streams Parameters**, the **Throughput** as a graph, and the **Results**.

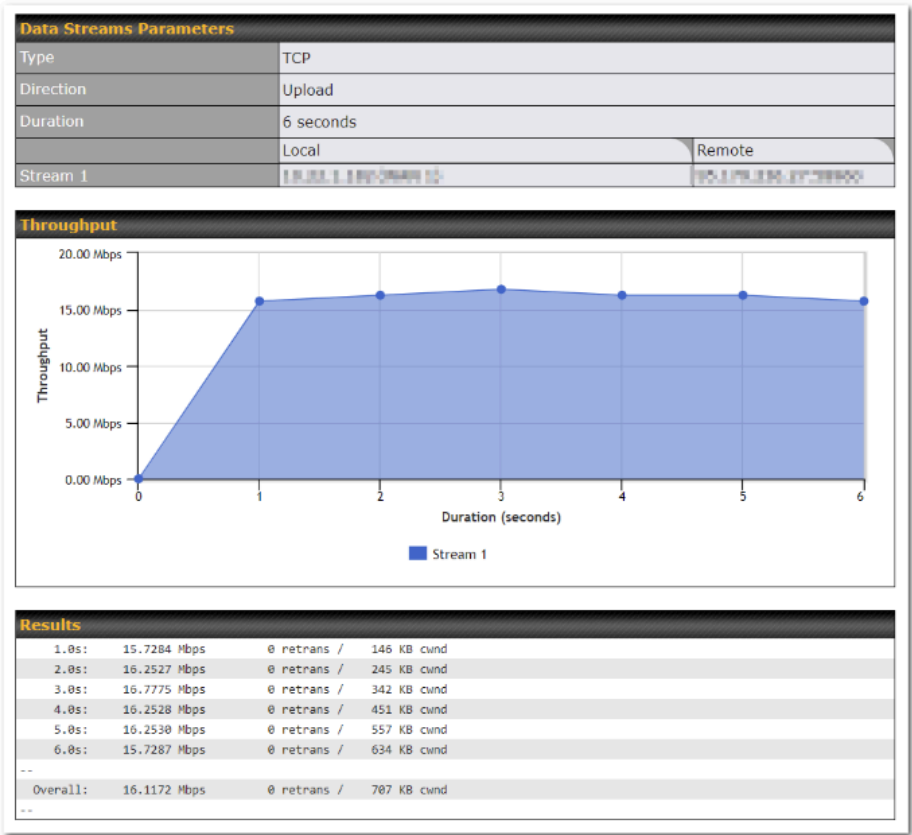

The test can be run again once it's complete by clicking the **Start** button or you can click **Close** and change the parameters for the test.

CLI (Command Line Interface Support)

The CLI (command line interface) can be accessed via SSH. This field enables CLI support. The below settings specify which TCP port and which interface(s) should accept remote SSH CLI access. The user name and password used for remote SSH CLI access are the same as those used for web admin access.



```
login as: admin
admin@192.168.1.1's password:
Last login: Mon Nov 7 19:03:59 2011 from 192.168.1.100
> get
bandwidth  clientlist  cpuload    eventlog   ha          s2svpn     session
system      uptime      wan
> system
debugmode  reboot
>
>
```

Ch30. Status

Device (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/device/>)

GPS Data (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/gps-data/>)

Active Sessions (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/active-sessions/>)

Client List (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/client-list/>)

WINS Client (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/wins-client/>)

UPnP / NAT-PMP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/upnp-nat-pmp/>)

OSPF & RIPv2 (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/ospf-ripv2/>)



BGP (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/bgp/>)

SpeedFusion Status (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/speedfusion-status/>)


Event Log (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch30-status/event-log/>)

Device

System information is located at **Status>Device**.

| System Information | |
|-------------------------|---|
| Device Name | |
| Model | Pepwave MAX BR1 Pro 5G |
| Product Code | |
| Hardware Revision | 1 |
| Serial Number | |
| Firmware | 8.3.0 build 5229 |
| SpeedFusion VPN Version | 9.2.0 |
| Host Name | |
| Uptime | 2 minutes |
| System Time | Mon Feb 20 11:25:42 +08 2023 |
| GPS File |  2023-02-03  Download |
| Diagnostic Report | Download |
| Remote Assistance | Turn On for <input type="text" value="7"/> days |

| MAC Address | |
|--------------------|--|
| LAN | |
| WAN | |
| Wi-Fi WAN on 5 GHz | |
| PepVPN NAT Mode | |


 [Legal](#)

System Information

| | |
|--|---|
| Device Name | This is the name specified in the Device Name field located at System > Admin Security . |
| Model | This shows the model name and number of this device. |
| Product Code | If your model uses a product code, it will appear here. |
| Hardware Revision | This shows the hardware version of this device. |
| Serial Number | This shows the serial number of this device. |
| Firmware | This shows the firmware version this device is currently running. |
| SpeedFusion VPN Version | This shows the current SpeedFusion VPN version. |
| Modem Support Version | This shows the modem support version. For a list of supported modems, click Modem Support List . |
| InControl Managed Configuration | InControl Managed Configurations (firmware, VLAN, Captive Portal, etcetera) |
| Host Name | The host name assigned to the Pepwave router appears here. |
| Uptime | This shows the length of time since the device has been rebooted. |
| System Time | This shows the current system time. |
| OpenVPN Client Profile | Link to download OpenVpn Client profile when this is enabled in Remote User Access |
| Diagnostic Report | The Download link is for exporting a diagnostic report file required for system investigation. |
| Remote Assistance | This option is to Turn on remote assistance with the time duration. |

The second table shows the MAC address of each LAN/WAN interface connected. To view your device's End User License Agreement (EULA), click  Legal.

GPS Data

| | | |
|--|----------------------|----------|
| GPX File  | 2019-03-22 (Today) ▾ | Download |
| Diagnostic Report | 2019-03-22 (Today) | |
| Remote Assistance | 2019-03-21 | |
| | 2019-03-20 | |
| | 2019-03-19 | |
| MAC Address | 2019-03-18 | |
| | 2019-03-17 | |
| LAN | 2019-03-16 | |

GPS enabled models automatically store up to seven days of GPS location data in GPS eXchange format (GPX). To review this data using third-party applications, click **Status > Device** and then download your GPX file.

The Pepwave GPS enabled devices export real-time location data in NMEA format through the LAN IP address at TCP port 60660. It is accessible from the LAN or over a SpeedFusion connection. To access the data via a virtual serial port, install a virtual serial port driver. Visit <http://www.peplink.com/index.php?view=faq&id=294> (<http://www.peplink.com/index.php?view=faq&id=294>) to download the driver.

Active Sessions

Information on active sessions can be found at **Status > Active Sessions > Overview**.

Overview

Search

Session data captured within one minute. [Refresh](#)

| Service | Inbound Sessions | Outbound Sessions |
|--------------------------------|------------------|-------------------|
| AIM/ICQ | 0 | 1 |
| Bittorrent | 0 | 32 |
| DNS | 0 | 51 |
| Flash | 0 | 1 |
| HTTPS | 0 | 76 |
| Jabber | 0 | 5 |
| MSN | 0 | 11 |
| NTP | 0 | 4 |
| QQ | 0 | 1 |
| Remote Desktop | 0 | 3 |
| SSH | 0 | 12 |
| SSL | 0 | 64 |
| XMPP | 0 | 4 |
| Yahoo | 0 | 1 |

| Interface | Inbound Sessions | Outbound Sessions |
|----------------------------|------------------|-------------------|
| WAN 1 | 0 | 176 |
| WAN 2 | 0 | 32 |
| Wi-Fi WAN | 0 | 51 |
| Cellular 1 | 0 | 64 |
| Cellular 2 | 0 | 0 |
| USB | 0 | 0 |

Top Clients

| Client IP Address | Total Sessions |
|-------------------|----------------|
| 10.9.66.66 | 1069 |
| 10.9.98.144 | 147 |
| 10.9.2.18 | 63 |
| 10.9.66.14 | 56 |
| 10.9.2.26 | 33 |

This screen displays the number of sessions initiated by each application. Click on each service listing for additional information. This screen also indicates the number of sessions initiated by each WAN port. In addition, you can see which clients are initiating the most sessions.

You can also perform a filtered search for specific sessions. You can filter by subnet, port, protocol, and interface. To perform a search, navigate to **Status > Active Sessions > Search**.

| Overview | Search |
|--|--|
| Session data captured within one minute. Refresh | |
| IP / Subnet | Source or Destination <input type="text"/> 255.255.255.255 (/32) ▼ |
| Port | Source or Destination <input type="text"/> |
| Protocol / Service | TCP ▼ |
| Interface | <input type="checkbox"/> WAN 1 <input type="checkbox"/> WAN 2 <input type="checkbox"/> Wi-Fi WAN <input type="checkbox"/> Cellular 1 <input type="checkbox"/> Cellular 2 <input type="checkbox"/> USB <input type="checkbox"/> VPN |
| Search | |
| Outbound | |
| Protocol | Source IP |
| Destination IP | Service |
| Interface | Idle Time |
| No sessions | |
| Total searched results: 0 | |
| Inbound | |
| Protocol | Source IP |
| Destination IP | Service |
| Interface | Idle Time |
| No sessions | |
| Total searched results: 0 | |
| Transit | |
| Protocol | Source IP |
| Destination IP | Service |
| Interface | Idle Time |
| No sessions | |
| Total searched results: 0 | |

This **Active Sessions** section displays the active inbound/outbound sessions of each WAN connection on the Pepwave router. A filter is available to sort active session information. Enter a keyword in the field or check one of the WAN connection boxes for filtering.

| Prohibited Client Access | | | |
|--------------------------|---------------------------|--------------|--|
| Service | Client | Blocked | |
| Wi-Fi | MAC address: B8:C3:85:41: | 1 minute ago |  |
| <div>Close</div> | | | |

UPnP / NAT-PMP

The table that shows the forwarded ports under UPnP and NAT-PMP protocols is located at **Status>UPnP/NAT-PMP**. This section appears only if you have enabled UPnP / NAT-PMP as mentioned in **Section 16.1.1**.

| Forwarded Ports | | | | | | |
|-----------------|----------|------------------|---------|----------|-----------------|---|
| External ▲ | Internal | Internal Address | Type | Protocol | Description | |
| 47453 | 3392 | 192.168.1.100 | UPnP | UDP | Application 031 |  |
| 35892 | 11265 | 192.168.1.50 | NAT-PMP | TCP | NAT-PMP 58 |  |
| 4500 | 3560 | 192.168.1.20 | UPnP | TCP | Application 013 |  |
| 5921 | 236 | 192.168.1.30 | UPnP | TCP | Application 047 |  |
| 22409 | 8943 | 192.168.1.70 | NAT-PMP | UDP | NAT-PMP 97 |  |
| 2388 | 27549 | 192.168.1.40 | UPnP | TCP | Application 004 |  |
| | | | | | | <div>Delete All</div> |

Click  to delete a single UPnP / NAT-PMP record in its corresponding row. To delete all records, click **Delete All** on the right-hand side below the table.

Important Note

UPnP / NAT-PMP records will be deleted immediately after clicking the  button or **Delete All**, without the need to click **Save** or **Confirm**.

OSPF & RIPv2

Shows status of OSPF and RIPv2

peplink Dashboard Setup Wizard Network AP System **Status** Apply Changes

Status

- Device
- Active Sessions
- Client List
- OSPF & RIPv2**
- BGP

OSPF & RIPv2

| Area | Remote Networks |
|---------|--|
| 0.0.0.0 | PepVPN 10.0.2.0/24 10.0.3.0/24 192.168.63.0/24 10.0.100.0/24 192.168.100.0/24 192.168.162.0/24 |

BGP

Shows status of BGP

peplink Dashboard Setup Wizard Network AP System **Status** Apply Changes

Status

- Device
- Active Sessions
- Client List
- OSPF & RIPv2
- BGP**

BGP

| Profile | Neighbor |
|---------|----------------|
| | No information |

SpeedFusion VPN

Current SpeedFusion VPN status information is located at **Status > SpeedFusion VPN**.

Details about SpeedFusion VPN connection peers appears as below:

SpeedFusion VPN - Remote Peer [Show all profiles](#)

Search

| Remote Peer | Profile | Information |
|-----------------------------|---------------------------|---------------------------------------|
| FSH-B987 (FusionHub_SG) | FusionHub_SG (1) | Client (FusionHub_SG) connected to... |
| FSH-B987 (FusionHub_SG) | FusionHub_SG (2 - Tunn... | ... |
| SFC-SIN-H018 (SFC-SIN-H018) | SFH-SHARE-SIN | ... |

Click on the corresponding peer name to explore the WAN connection(s) status and subnet information of each VPN peer.

SpeedFusion VPN - Remote Peer [Show all profiles](#)

Search

| Remote Peer | Profile | Information |
|-----------------------------|---|-------------|
| FSH-B987 (FusionHub_SG) | FusionHub_SG (1) | ... |
| WAN | Rx: < 1 kbps Tx: < 1 kbps Loss rate: 0.0 pkt/s Latency: 11 ms | |
| Cellular | Not available - WAN down | |
| Wi-Fi WAN | Not available - WAN disabled | |
| Total | Rx: < 1 kbps Tx: < 1 kbps Loss rate: 0.0 pkt/s | |
| FSH-B987 (FusionHub_SG) | FusionHub_SG (2 - Tunn... | ... |
| SFC-SIN-H018 (SFC-SIN-H018) | SFH-SHARE-SIN | ... |

Click the  button for a SpeedFusion chart displaying real-time throughput, latency, and drop-rate information for each WAN connection.



When pressing the  button, the following menu will appear:

SpeedFusion VPN Details

Connection Information

Profile

FusionHub_SG (1)

Remote ID

FusionHub_SG

Device Name

Serial Number

WAN Statistics

Remote Connections

☐ Show remote connections

WAN Label

☒ WAN Name
☐ IP Address and Port

WAN

Rx: < 1 kbps Tx: < 1 kbps Loss rate: 0.0 pkt/s Latency: 11 ms

Cellular

Not available - WAN down

Wi-Fi WAN

Not available - WAN disabled

Total

Rx: < 1 kbps Tx: < 1 kbps Loss rate: 0.0 pkt/s

SpeedFusion VPN Test Configuration

Type

☒ TCP
☐ UDP

Streams

4

Direction

☒ Upload
☐ Download

Duration

20 seconds (5 - 600)

Start

SpeedFusion VPN Test Results

No information

The **connection information** shows the details of the selected SpeedFusion VPN profile, consisting of the Profile name, **Router ID**, **Router Name** and **Serial Number** of the remote router

Advanced features for the SpeedFusion VPN profile will also be shown when the **More Information** checkbox is selected.

The **WAN statistics** show information about the local and remote WAN connections (when **show Remote connections**) is selected.

The available details are **WAN Name**, **IP address** and **port** used for the Speedfusion connection. **Rx and Tx rates**, **Loss rate** and **Latency**.

Connections can be temporarily disabled by sliding the switch button next to a WAN connection to the left.

The wan-to-wan connection disabled by the switch is temporary and will be re-enabled after 15 minutes without any action.

This can be used when testing the SpeedFusion VPN's speed between two locations to see if there is interference or network congestion between certain WAN connections.

WAN Statistics

Remote Connections

☒ Show remote connections

WAN Label

☒ WAN Name ☐ IP Address and Port

BT

☐

WAN

☒

Virgin Media

☐

Rx:

< 1 kbps

Tx:

< 1 kbps

Loss rate:

0.0 pkt/s

Latency:

17 ms

Not available - WAN disabled

The SpeedFusion VPN test configuration allows us to configure and perform thorough tests. This is usually done after the initial installation of the routers and in case there are problems with aggregation.

SpeedFusion VPN Test Configuration

Type

☒ TCP ☐ UDP

Streams

4

Direction

☒ Upload ☐ Download

Duration

20 seconds (5 - 600)

Start

Press the Start button to perform throughput test according to the configured options.

If TCP is selected, 4 parallel streams will be generated to get the optimal results by default. This can be customized by selecting a different value of streams.

Using more streams will typically get better results if the latency of the tunnel is high.

| SpeedFusion VPN Test Results | | | | |
|------------------------------|--------------|-------------|-------------|--|
| 1.0s: | 16.2527 Mbps | 0 retrans / | 306 KB cwnd | |
| 2.0s: | 20.4445 Mbps | 0 retrans / | 306 KB cwnd | |
| 3.0s: | 18.3526 Mbps | 0 retrans / | 306 KB cwnd | |
| 4.0s: | 17.8258 Mbps | 0 retrans / | 306 KB cwnd | |
| 5.0s: | 17.3014 Mbps | 0 retrans / | 306 KB cwnd | |
| 6.0s: | 14.1558 Mbps | 0 retrans / | 306 KB cwnd | |
| 7.0s: | 18.3500 Mbps | 0 retrans / | 306 KB cwnd | |
| 8.0s: | 15.7252 Mbps | 0 retrans / | 306 KB cwnd | |
| 9.0s: | 17.2932 Mbps | 0 retrans / | 306 KB cwnd | |
| 10.0s: | 20.4591 Mbps | 0 retrans / | 306 KB cwnd | |
| 11.0s: | 11.5347 Mbps | 0 retrans / | 306 KB cwnd | |
| 12.0s: | 15.2043 Mbps | 0 retrans / | 306 KB cwnd | |
| 13.0s: | 12.0584 Mbps | 0 retrans / | 306 KB cwnd | |
| 14.0s: | 13.1074 Mbps | 0 retrans / | 306 KB cwnd | |
| 15.0s: | 10.4849 Mbps | 0 retrans / | 306 KB cwnd | |
| 16.0s: | 12.5838 Mbps | 0 retrans / | 306 KB cwnd | |
| 17.0s: | 15.2043 Mbps | 0 retrans / | 306 KB cwnd | |
| 18.0s: | 16.2486 Mbps | 0 retrans / | 306 KB cwnd | |
| 19.0s: | 18.8789 Mbps | 0 retrans / | 306 KB cwnd | |
| 20.0s: | 18.3491 Mbps | 0 retrans / | 306 KB cwnd | |
| -- | | | | |
| Stream 1: | 3.9913 Mbps | 0 retrans / | 78 KB cwnd | |
| Stream 2: | 3.9728 Mbps | 0 retrans / | 74 KB cwnd | |
| Stream 3: | 3.9879 Mbps | 0 retrans / | 75 KB cwnd | |
| Stream 4: | 4.0044 Mbps | 0 retrans / | 79 KB cwnd | |
| | | | | |
| Overall: | 15.9564 Mbps | 0 retrans / | 306 KB cwnd | |
| -- | | | | |
| TEST DONE | | | | |

Peplink also published a whitepaper about Speedfusion which can be downloaded from the following url:
<http://download.peplink.com/resources/whitepaper-speedfusion-and-best-practices-2019.pdf>

Event Log

Event log information is located at **Status > Event Log**.

Device Event Log



The log section displays a list of events that has taken place on the Pepwave router. Click the



to refresh log entries automatically. Click the



button to clear the log.

Firewall Event log





The screenshot shows the 'SpeedFusion VPN Event Log' window. The log contains the following entries:

| Timestamp | Event Description |
|-----------------|--|
| Dec 29 16:57:17 | SpeedFusion: SFC-SIN-H018 [redacted] |
| Dec 29 16:56:43 | SpeedFusion: SFH-SHARE-SIN failed to establish connection |
| Dec 29 16:56:42 | SpeedFusion: [redacted] |
| Dec 29 16:56:38 | SpeedFusion: SFC-SIN-H018 [redacted] (link failure detected) |
| Jan 01 08:04:00 | SpeedFusion: FusionHub_SG [redacted] |
| Jan 01 08:03:53 | SpeedFusion: [redacted] suite TLS_AES_256_GCM_SHA384 |
| Jan 01 08:03:51 | SpeedFusion: [redacted] |
| Jan 01 08:03:48 | SpeedFusion: [redacted] |
| Jan 01 08:03:43 | SpeedFusion: [redacted] TLS_AES_256_GCM_SHA384 |



WAN Quality

Connection: WAN

Latency

— Latency (ms)

For cellular connections it shows signal strength, quality, throughput and latency for the past hour.

This section shows bandwidth usage statistics and is located at **Status > Usage Reports**. Bandwidth usage at the LAN while the device is switched off (e.g., LAN bypass) is neither recorded nor shown.

Real-Time (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch32-usage-reports/real-time/>)


Hourly (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch32-usage-reports/hourly/>)

Daily (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch32-usage-reports/daily/>)

Monthly (<https://manual.peplink.com/documentation/pepwave-max-user-manual/ch32-usage-reports/monthly/>)

Real-Time

The **Data transferred since installation** table indicates how much network traffic has been processed by the device since the first bootup. The **Data transferred since last reboot** table indicates how much network traffic has been processed by the device since the last bootup.

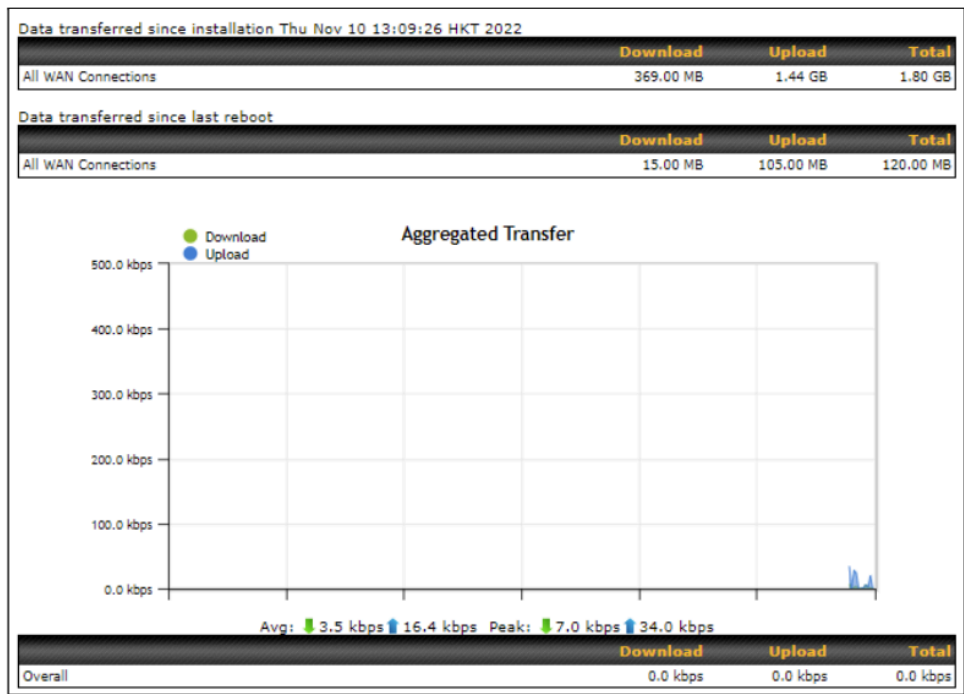



Daily

This page shows the daily bandwidth usage for all WAN connections, with the option of viewing each individual connection.

Select the connection to check from the drop-down menu. If you have enabled the **Bandwidth Monitoring** feature, the **Current Billing Cycle** table for that WAN connection will be displayed.

Click on a date to view the client bandwidth usage of that specific date. This feature is not available if you have selected to view the bandwidth usage of only a particular WAN connection. The scale of the graph can be set to display megabytes (**MB**) or gigabytes (**GB**).



All WAN Daily Bandwidth Usage


Monthly

This page shows the monthly bandwidth usage for each WAN connection. If you have enabled the **Bandwidth Monitoring** feature, you can check the usage of each particular connection and view the information by **Billing Cycle** or by **Calendar Month**.

Click the first two rows to view the client bandwidth usage in the last two months. This feature is not available if you have chosen to view the bandwidth of an individual WAN connection. The scale of the graph can be set to display megabytes (**MB**) or gigabytes (**GB**).



All WAN Monthly Bandwidth Usage

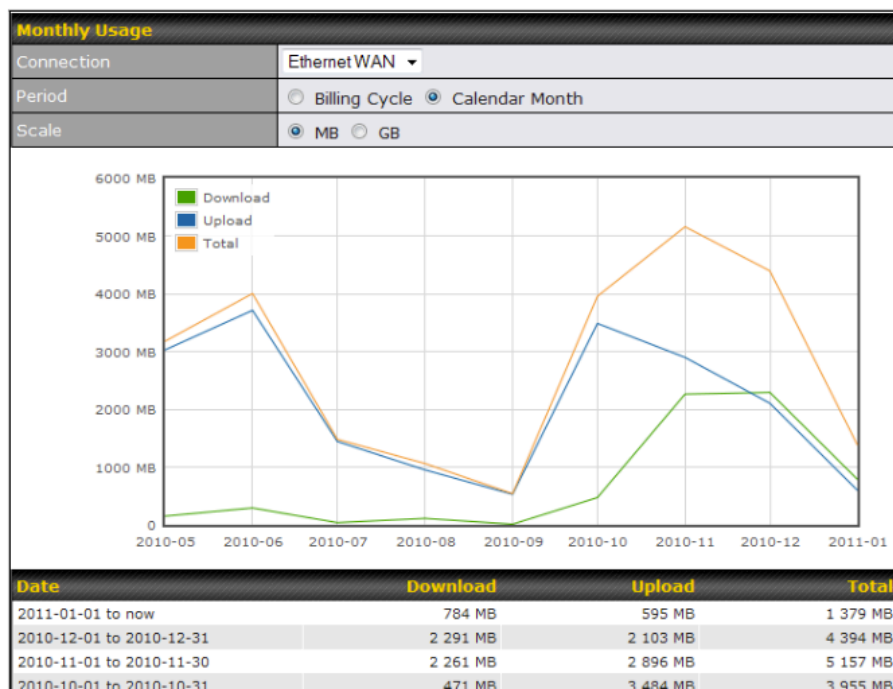

Ethernet WAN Monthly Bandwidth Usage

Tip

By default, the scale of data size is in **MB**. 1GB equals 1024MB.

Appendix A. Restoration of Factory Defaults

Restoration of Factory Defaults

To restore the factory default settings on a Pepwave router, follow the steps below:

1. Locate the reset button on the front or back panel of the Pepwave router.
2. With a paperclip, press and keep the reset button pressed.

Hold for approximately 10 seconds for factory reset (Note: The LED status light shows in RED, until the status light off and release the button).

After the Pepwave router finishes rebooting, the factory default settings will be restored.

Important Note

All previous configurations and bandwidth usage data will be lost after restoring factory default settings. Regular backup of configuration settings is strongly recommended.



Appendix B. FusionSIM Manual

FusionSIM Manual

Peplink has developed a unique technology called FusionSIM, which allows SIM cards to remotely link to a cellular router. This can be done via cloud or within the same physical network. There are a few key scenarios to fit certain applications.

The purpose of this manual is to provide an introduction on where to start and how to set up for the most common scenarios and uses.

Requirements

1. A Cellular router that supports FusionSIM technology
2. SIM Injector
3. SIM card

Notes:

- Always check for the latest Firmware version (<https://www.peplink.com/support/downloads/>) for both the cellular router and the SIM Injector. You can also check for the latest Firmware version on the device's WEB configuration page.
- A list of products that support FusionSIM can be found on the SIM Injector WEB page (<https://www.peplink.com/products/sim-injector/>). Please check under the section **Supported models**.

SIM Injector reset and login details

How to reset a SIM Injector:

- Hold the reset button for 5-10 seconds. Once the LED status light turns RED, the reset button can be released. SIM Injector will reboot and start with the factory default settings.

The default WEB login settings:

- **User:** admin
- **Password:** admin
- IP address: the device only has a DHCP client and no fallback IP address. Therefore, it is advised to check every time what IP address is assigned to the SIM Injector.


Notes:

- The SIM Injector can be monitored via InControl 2. Configuration is not supported.

Scenario 1

SIM Injector in LAN of Cellular Router

Setup topology

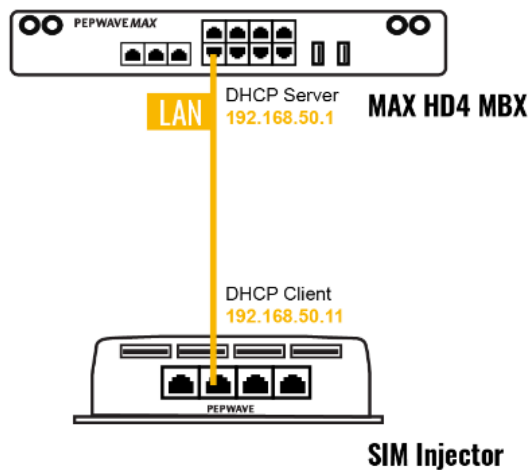

This is the most basic scenario in which the SIM Injector is connected directly to the cellular router's LAN port via an ethernet cable. This allows for the cellular router to be positioned for the best possible signal. Meanwhile, the SIM cards can be conveniently located in other locations such as the office, passenger area, or the bridge of a ship. The SIM Injector allows for easily swapping SIM cards without needing to access a cellular router.

IMPORTANT: Cellular WAN will not fallback to the local SIM if it is configured to use the SIM Injector.

Configuring the SIM Injector

1. Connect the SIM Injector to the LAN port of the cellular router.
2. Insert SIM cards into the SIM Injector. The SIM cards will be automatically detected.

IMPORTANT: SIM cards inserted into SIM Injector must not have a PIN code.

Note 1: The SIM Injector gets its IP address via DHCP and doesn't have a static IP address. To find it's address, please check the DHCP lease on the cellular router.

Configuring the Cellular Router

Step 1. Enable the SIM Injector communication protocol.

1a. If you are using a Balance cellular router, go to the **Network** tab (top navigation bar).

1b. If you are using a MAX cellular router, go to the **Advanced** tab (top navigation bar).

2. Under **Misc. settings** (left navigation bar) find **Remote SIM Management**.
3. In **Remote SIM Management**, click on the edit icon next to **Remote SIM is Disabled**.



4. Check the **Auto LAN discovery** checkbox and click **Save** and **Apply Changes**.




5. Click **Save** and then **Apply Changes**.

Step 2. Enable RemoteSIM for the selected Cellular interface.

1. Go to **Network** (top navigation bar), then **WAN** (left navigation bar) and click **Details** for a selected cellular WAN. This will open the WAN Connection Settings page.



2. Scroll down to **Cellular settings**.
3. In the **SIM Card** section, select **Use Remote SIM Only**.

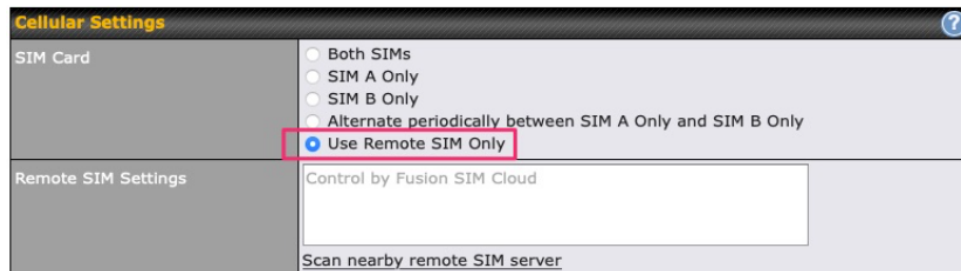


4. Enter configuration settings in **Remote SIM Settings** section. Click on **Scan nearby remote SIM server** to show the serial number(s) of the connected SIM Injector(s). Available configuration options for cellular interface are shown below:

A. Defining SIM Injector(s)

- Format: <S/N>
- Example 1: 1111-2222-3333
- Example 2: 1111-2222-3333 4444-5555-6666

B. Defining SIM Injector(s) SIM slot(s):

- Format: <S/N:slot number>
- Example 1: 1111-2222-3333:7,5 (the Cellular Interface will use SIM in slot 7, then 5)
- Example 2: 1111-2222-3333:1,2 1111-2222-3333:3,4 (the cellular Interface will use SIM in slot 1, then in 2 from the first SIM Injector, and then it will use 3 and 4 from the second SIM Injector).

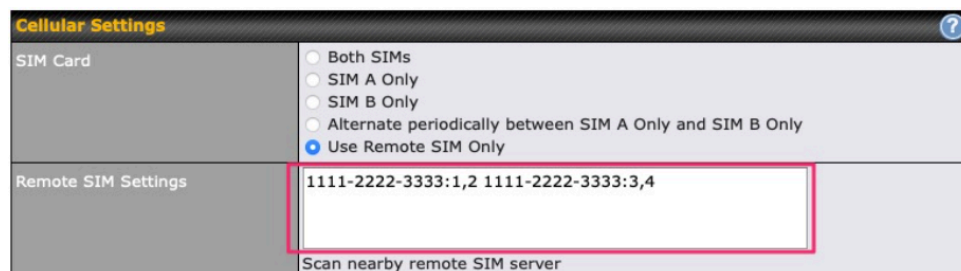

Note: It is recommended to use different SIM slots for each cellular interface.

5. Click **Save** and **Apply Changes**.

Step 3. (Optional) Custom SIM cards settings.

1a. For a Balance router, go to the **Network** (Top tab).

1b. For a MAX router, go to the **Advanced** (Top tab).

2. Under **Misc. settings** (Left-side tab) find **Remote SIM Management**.
3. Click on the **Add Remote SIM** button, fill in all the required info and click **Save**. This section allows defining custom requirements for a SIM card located in a certain SIM slot:
 - Enable/Disable roaming (by default roaming is disabled).
 - Add Custom mobile operator settings (APN, user name, password).
4. Repeat configuration for all SIM cards which need custom settings.
5. Click **Apply Changes** to take effect.

Scenario 2

SIM Injector in WAN of main Router and multiple Cellular Routers

Setup topology



In this scenario, each HD Dome creates a WAN connection to the main router. A single SIM Injector is used to provide SIM cards for each HD Dome. The HD Dome can be replaced with any Peplink cellular router supporting RemoteSIM technology.

This scenario requires the completion of the configuration steps shown in Scenario 1 in addition to the configuration steps explained below.

Additional configurations for Cellular Routers

Step 1. Disable the DHCP server.

- HD Dome 1 should act as a DHCP server.
- HD Dome 2 should be configured to have a static IP address with DHCP disabled.
- Both routers should be in the same subnet (e.g. 192.168.50.1 and 192.168.50.2).

1. Go to **Network** (Top tab), then **Network Settings** (Left-side tab), and click on **Untagged LAN**. This will open up the LAN settings page.
2. Change the IP address to 192.168.50.2.
3. In the **DHCP Server** section, uncheck the checkbox to disable DHCP Server.
4. Click **Save** and **Apply Changes**.

Step 2. Ethernet port configuration

The Ethernet port must be set to **ACCESS** mode for each HD Dome. To do this, dummy VLANs need to be created first.

1. Go to **Network** (Top tab), then **Network Settings** (Left-side tab), and click on **New LAN**. This will open the settings page to create a dummy VLAN.
2. The image below shows the values that need to be changed to create a new VLAN:

LAN

IP Settings

IP Address: 192.168.10.1 255.255.255.0 (/24)

Network Settings

Name: VLAN10

VLAN ID: 10

Inter-VLAN routing: ☒

Captive Portal: ☐

DHCP Server

DHCP Server: ☐ Enable

DHCP Server Logging: ☐

IP Range: - 255.255.255.0 (/24)

Note: set different IP addresses for each HD dome (e.g. 192.168.10.1 and 192.168.10.2).

3. Click Save and **Apply Changes**.
4. Go to **Network** (Top tab), then **Port Settings** (Left-side tab).
5. Set the Port Type to **Access** and set VLAN to **Untagged LAN** (see picture below).

PEPWAVE Dashboard SpeedFusion Cloud **Network** Advanced AP System Status Apply Changes

LAN

- Network Settings
- Port Settings**
- Captive Portal

WAN

Logout

Port Settings

| | Name | Enable | Speed | Advertise Speed | Port Type | VLAN |
|---|----------|-------------------------------------|-------|-------------------------------------|-----------|--------------|
| 1 | LAN Port | <input checked="" type="checkbox"/> | Auto | <input checked="" type="checkbox"/> | Access | Untagged LAN |

Save

Untagged LAN

6. Click **Save** and **Apply Changes**.

Configuration requirements for the main Router


Requirements for the main router are:

- Configure **WAN 1** as a DHCP client.
- **WAN 1** will automatically get the Gateway IP address from HD Dome 1.
- Configure **WAN 2** as a Static IP and set it to 192.168.50.12.
- Configure **WAN 2** Gateway to 192.168.50.2. Same as the HD Dome 2's IP address.

Scenario 3

SIM Injector in LAN of main Router and multiple Cellular Routers

Setup topology

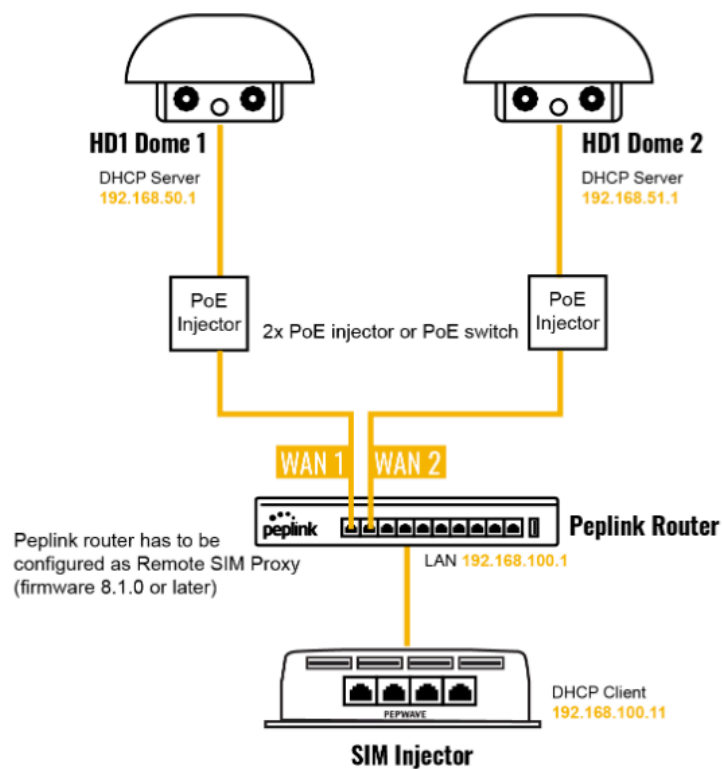

In this scenario, SIMs are provided to the HD Domes via the main router. In this example, the **Remote SIM Proxy** functionality needs to be enabled on the main router.

Notes:

- HD Dome can be replaced with any other cellular router that supports RemoteSIM.
- It is recommended to use Peplink Balance series (<https://www.peplink.com/products/balance-series/>) or X series (<https://www.peplink.com/products/x-series/>) routers as the main router.

This scenario requires the completion of the configuration steps for the cellular router and the SIM Injector as in Scenario 1. The configuration for the main router is explained below.

Main Router configuration

IMPORTANT: Main router LAN side and Cellular Routers must be configured using different subnets, e.g. 192.168.50.1/24 and 192.168.100.1/24.

Note: please make sure the Peplink router is running Firmware 8.1.0 or above.

1. Open the main router WEB interface and change:

From `<IP address>/cgi-bin/MANGA/index.cgi` to `<IP address>/cgi-bin/MANGA/support.cgi`.

This will open the support.cgi page.




2. Scroll down to find **Remote SIM Proxy** and click on **[click to configure]** that is located next to it.
3. Check the **Enable** checkbox.
4. Click on **Save**.
5. Go back to the index.cgi page and click on **Apply Changes**.

Scenario 4

SIM Injector in a remote location

Setup topology

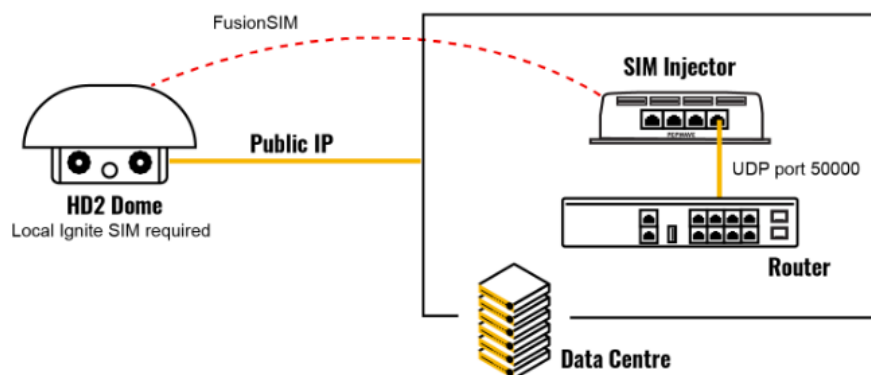

Requirements for installing a SIM Injector in a remote location:

- Cellular router communicates with the SIM Injector via UDP port 50000. Therefore this port must be reachable via public IP over the Internet.
- The one way latency between the cellular router and the SIM Injector should be **up to 250 ms**. A higher latency may lead to stability issues.
- The cellular router must have Internet connection to connect to the SIM Injector. It can be another Internet connection via Ethernet or Fiber if possible, or a secondary cellular interface with a local SIM (Ignite SIM).
- Due to its high latency, it is not recommended to use satellite WAN for connecting to a SIM Injector in remote locations.

SIM Injector configuration is the same as in Scenario 1.

Cellular Router configuration

Step 1. Enable the SIM Injector communication protocol.


1a. For a Balance cellular router, go to the **Network** (Top tab).

1b. For a MAX cellular router, go to the **Advanced** (Top tab).

2. Under **Misc. settings** (Left-side tab), find **Remote SIM Management**.

3. In **Remote SIM Management**, click on the edit icon next to **Remote SIM is Disabled**.

4. Enter the public IP of the SIM Injector and click **Save** and **Apply Changes**.

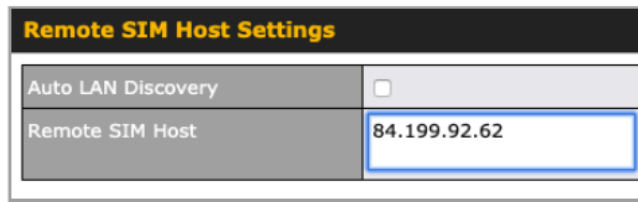

The screenshot shows a dialog box titled "Remote SIM Host Settings". It has two rows. The first row is "Auto LAN Discovery" with a checkbox that is currently unchecked. The second row is "Remote SIM Host" with a text input field containing the IP address "84.199.92.62". The input field has a blue border.

Notes:


- Do NOT check Auto LAN Discovery.
- Do NOT add a SIM Injector serial number to the Remote SIM Host field.

Step 2. RemoteSIM and custom SIM card settings configurations are the same as in Scenario 1.

How to check if a Pepwave Cellular Router supports Remote SIM

1. Go to **Network** (Top tab), then **WAN** (Left-side tab), and click **Details** on any cellular WAN. This will open the WAN Connection Settings page.
2. Scroll down to **Cellular settings**.

If you can see the **Remote SIM Settings** section, then the cellular router supports Remote SIMs.

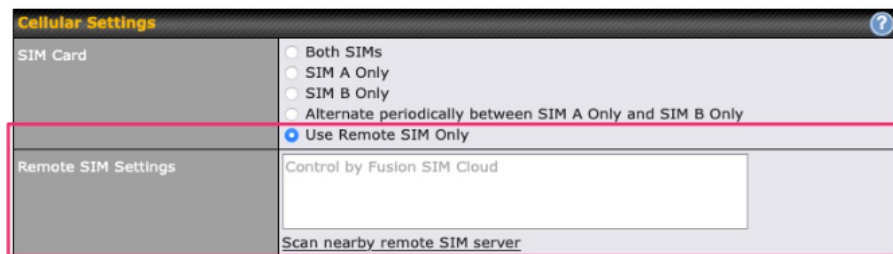

The screenshot shows a dialog box titled "Cellular Settings". It has two main sections. The first section is "SIM Card" with five radio button options: "Both SIMs", "SIM A Only", "SIM B Only", "Alternate periodically between SIM A Only and SIM B Only", and "Use Remote SIM Only". The "Use Remote SIM Only" option is selected. The second section is "Remote SIM Settings" with a text input field containing "Control by Fusion SIM Cloud" and a link below it that says "Scan nearby remote SIM server".

Monitor the status of the Remote SIM

1. Go to **Network** (Top tab), then **WAN** (Left-side tab), and click **Details** on the cellular WAN which was configured to use RemoteSIM.
2. Check the **WAN Connection Status** section. Within the cell WAN details, there is a section for **Remote SIM** (SIM card IMSI, SIM Injector serial number and SIM slot).

| WAN Connection Settings | | |
|-------------------------|---|------------------------|
| WAN Connection Status | | |
| | SIM Card A | SIM Card B |
| IMSI | (No SIM Card Detected) | (No SIM Card Detected) |
| ICCID | - | - |
| MTN | - | - |
| Remote SIM | IMSI: 246012102883787 Serial Number: 392C-03F2-915E Slot: 1 | |
| MEID | HEX: 35907206546976 DEC: 089865882205532022 | |
| IMEI | 359072065469765 | |

Appendix C. Overview of ports used by Peplink SD-WAN routers and other Peplink services

Overview of ports used by Peplink SD-WAN routers and other Peplink services

| Default Port Number | Usage | Service | Inbound/Outbound | Default Status |
|---------------------|---|-------------------------------|---------------------|----------------|
| UDP 5246 | Data flow | InControl | Outbound | Enabled |
| TCP 443 | HTTPS service | InControl | Outbound | Enabled |
| TCP 5246 | Optional, used when TCP 443 is not responding | InControl | Outbound | Enabled |
| TCP 5246 | Remote Web Admin | InControl Virtual Appliance | Outbound | Enabled |
| TCP 4500 | VPN Data (TCP Mode) | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| TCP 32015 | VPN handshake | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| UDP 4500 | VPN Data | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| UDP 32015* | VPN Data (alternative) | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| TCP/UDP 4500+N-1^ | VPN Sub-Tunnels Data | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| UDP 32015+N-1^ | VPN Sub-Tunnels Data (alternative) | SpeedFusion VPN / SpeedFusion | Inbound / Outbound* | Disabled |
| UDP 4500 | VPN Data | IPsec | Inbound / Outbound* | Disabled |
| UDP 500 | VPN initiation | IPsec | Inbound / Outbound* | Disabled |
| UDP 500 | L2TP | Remote User Access | Inbound | Disabled |

| | | | | |
|---------------|--|-------------------------------------|----------|----------|
| UDP 1701 | L2TP | Remote User Access | Inbound | Disabled |
| UDP 4500 | L2TP | Remote User Access | Inbound | Disabled |
| UDP 1194 | OpenVPN | Remote User Access | Inbound | Disabled |
| IP 47 | PPTP (GRE) | Remote User Access | Inbound | Disabled |
| TCP 2222 | Remote Assistance Direct connection | Peplink Troubleshooting Assistance | Outbound | Enabled |
| TCP 80 | HTTP traffic | Web Admin Interface access | Inbound | Enabled |
| TCP 443 | HTTPS traffic | Web Admin Interface access (secure) | Inbound | Enabled |
| TCP 8822 | SSH | SSH | Inbound | Disabled |
| UDP 161 | SNMP Get | SNMP monitoring | Inbound | Disabled |
| UDP 162 | SNMP Trap | SNMP monitoring | Outbound | Disabled |
| TCP, UDP 1812 | Radius Authentication | Radius | Outbound | Disabled |
| TCP, UDP 1813 | Radius Accounting | Radius | Outbound | Disabled |
| UDP 123 | Network Time Protocol | NTP | Inbound | Disabled |
| | | | Outbound | Enabled |
| TCP 60660 | Real-time location data in NMEA format | GPS | Outbound | Disabled |

Disclaimer:

- By default, only TCP 32015 and UDP 4500 are needed for SpeedFusion VPN / SpeedFusion.
- Inbound / Outbound* – Inbound = For Server mode; Outbound = For Client mode
- UDP 32015° – If IPsec VPN or L2TP/IPsec RUA is enabled, the UDP 4500 is occupied, so SpeedFusion VPN / SpeedFusion will automatically switch to UDP 32015 as VPN data port .
- UDP 32015+N-1^ / TCP/UDP 4500+N-1^ – When using Sub-Tunnels, multiple ports are in use (1 for each Sub-Tunnel profile).
- The default UDP data ports used when using (N number of Sub-Tunnel profiles) are: 4500... 4500+N-1, or (when port 4500 is in use by IPsec or L2TP/IPsec) 32015... 32015+N-1”.

Appendix D. Declaration

Details of the declaration can be found here
(<https://download.peplink.com/manual/pepwave-max-user-manual-declaration.pdf#page=87>) (from page 89).